


THE STATE OF DELAWARE DEPARTMENT OF TRANSPORTATION



STANDARD CONSTRUCTION DETAILS

THIS DOCUMENT USES U.S. CUSTOMARY UNITS

SHEET NO.	NAME SECTION I - BARRIER
B-L (2017)	- BARRIER LEGEND
B-1	- GUARDRAIL APPLICATIONS (TYPES 1-31, 2-31, AND 3-31) (2020) - 1 PLAN VIEWS
	(2020) - 2 ELEVATION VIEWS AND SPLICE DETAIL
	(2020) - 3 SECTION VIEWS
	(2020) - 4 TYPE 1-31, GUARDRAIL WITH OMITTED POST (2020) - 5 TYPE 1-31, GUARDRAIL STEEP SLOPE
B-2	- GRADING FOR GUARDRAIL END TREATMENTS (TYPES 1, 2, AND 3)
	(2020) - 1 TYPE 1-31 (2020) - 2 TYPE 2-31
	(2020) - 2 TYPE 2-31 (2020) - 3 TYPE 3-31
B-3	– GUARDRAIL OVER CULVERTS (TYPES 1-31, 2-31, AND 3-31)
	(2020) - 1 TYPE 1-31 (2020) - 2 TYPE 2-31
	(2020) - 2 TYPE 3-31
• •	- END ANCHORAGE , TYPE 1-31
B-5	- RESERVED
B-6	- RESERVED
` '	- W-BEAM, TYPE 1-27 TO TYPE 1-31 TRANSITION SECTION
B-8 (2020)	— GUARDRAIL TO BARRIER CONNECTION - APPROACH AND EXIT TYPE 1-31 (2020) - 1 APPROACH TYPE 1-31- PLAN AND ELEVATION VIEWS
	(2020) - 2 TYPE 1 HARDWARE
	(2020) - 3 BENT PLATE RUB RAIL
B-9	(2020) - 4 EXIT TYPE 1-31
B-10	- GUARDRAIL TO BARRIER CONNECTION - APPROACH TYPE 3-31
	(2020) - 1 APPROACH TYPE 3-31- PLAN AND ELEVATION VIEWS
	(2020) - 2 POST
	(2020) - 4 TERMINAL END SHOE AND CONNECTION
B-11	- THRIE-BEAM APPROACH GUARDRAIL TRANSITION (AGT) TO CONCRETE BUTTRESS
	(2020) - 1 THRIE-BEAM AGT TO CONNECTION BUTTRESS - ELEVATION AND PLAN VIEWS (2020) - 2 THRIE-BEAM AGT TO CONCRETE BUTTRESS - PLAN, ELEVATION, AND SECTION REINFORCEMENT VIEWS
	(2020) - 3 36" F- SHAPE TRANSITION
	(2020) - 4 36" F- SHAPE TRANSITION REINFORCEMENT
	(2020) - 5 42" F- SHAPE TRANSITION (2020) - 6 42" F- SHAPE TRANSITION REINFORCEMENT
	(2020) - 7 42" SINGLE SLOPE TRANSITION
D 13	(2020) - 8 42" SINGLE SLOPE TRANSITION REINFORCEMENT
B-12 B-13	- RESERVED - HARDWARE
D 13	(2020) - 1 W-BEAM SECTION AND ELEVATION VIEWS
	(2020) - 2 W-BEAM STEEL POST AND OFFSET BLOCK
	(2020) - 3 W-BEAM TERMINAL CONNECTOR (2020) - 4 THRIE BEAM AND THRIE BEAM EXPANSION ELEMENT SECTION AND ELEVATION
	(2020) - 5 THRIE BEAM STEEL POST AND OFFSET BLOCK
	(2020) - 6 ASYMMETRIC AND SYMMETRIC W-BEAM TO THRIE BEAM TRANSITION SECTION (2020) - 7 WOOD DEESET BLOCKS SOIL BLATE STEEL TUBE AND WOOD REFADAWAY POSTS
	(2020) - 7 WOOD OFFSET BLOCKS, SOIL PLATE, STEEL TUBE AND WOOD BREADAWAY POSTS (2020) - 8 END ANCHORAGE HARDWARE
	(2020) - 9 REFLECTOR AND W-BEAM BEARING PLATE
	(2020) - 10 GUARDRAIL MOUNTED RAIL (2020) - 11 DOWNSTREAM ANCHORAGE SYSTEM - GROUND STRUT & ANCHOR BRACKET
	(2020) - 12 GUARDRAIL TO BARRIER CONNECTION - THRIE BEAM TERMINAL CONNECTOR



SHEET

1 OF

6

SHEET NO.	NAME	SECTION I - BARRIER (CONT'D)
B-14	- RESERVED	
B-15	 GUARDRAIL APPLICATIONS, 2 	27"
		NETAII
	, ,	DETAIL
B-16	DECEDI/ED	
B-17 (2020) – GUARDRAIL END TREATMEN	T, TYPE 4-27
-		N, TYPE 1-27
B-19		
B-20		TERMINAL, TYPE 1-31
D-20		/TERIVITIVAL, TTPE 1-31
	(2020) - 2 SECTION VIEWS	
	•	
B-21	DECEDIZED	
B-21	DECEDICED	
B-23	DECEDVED.	
B-24	DECEDVED.	
B-25		ER, 36"
D 23	(2020) - 1 TYPICAL SECTIONS, TYPE 1, TYPI	E 2, AND TYPE 3
		NT
B-26	- CONCRETE ROADSIDE BARRII	ER, 42" E 2, AND TYPE 3
		NT
B-27	 CONCRETE ROADSIDE BARRII 	ER, 32" F-SHAPE
D 20		NT FD 26" F CHARF
B-28	- CONCRETE ROADSIDE BARRII (2020) - 1 ELEVATION AND REINFORCEME	ER, 30 F-SMAPE NT
B-29	- CONCRETE ROADSIDE BARRII	
D 20	(2020) - 1 ELEVATION AND REINFORCEME	
B-30	- CONCRETE ROADSIDE BARRII (2020) - 1 ELEVATION AND REINFORCEME	<i>'</i>
SHEET NO.	NAME	SECTION II - CURB & GUTTER
C-1	- PCC CURB	
<u>.</u>		
	• •	
	` '	(FOR USE AT PEDESTRIAN CONNECTIONS ONLY). GUARDRAIL MEDIAN CURB
C-2	- PEDESTRIAN CONNECTION	SOARDRAIL WEDIAN CORD
	(2020) - 1 TYPE 1	
	, , , , , , , , , , , , , , , , , , , ,	
C-3 (2020)	(2020) - 3 TYPE 5	
C-4 (2020)	- CURB OPENING	
C-5 (2020)	- CURB/ SIDEWALK OPENING.	
C-6 (2017)	 CURB RETAINING WALL 	



SHEET

OF

F

SHEET NO.	NAME	SECTION III - DRAINAGE
D-1	- CONCRETE 6:1 SAFETY END STRUCTURE	
	(2018) - 1 PLAN AND SECTION VIEWS	
D-2	(2018) - 2 SCHEDULES — CONCRETE 10:1 SAFETY END STRUCTURE	
D-Z	(2018) - 1 PLAN AND SECTION VIEWS	
	(2018) - 2 SCHEDULES	
D-3	- SAFETY GRATES	
	(2020) - 1 SAFETY END STRUCTURE GRATE AND ASSEMBLY	
D D (2020)	(2020) - 2 PERSONNEL SAFETY GRATE FOR PIPE INLET	
	DRAINAGE INLET REFERENCE SHEET	
	- INLET BOX	
D-5	- DRAINAGE INLET DETAILS	
	(2020) - 1 DRAINAGE INLET ASSEMBLY (2020) - 2 DRAINAGE INLET FRAME AND GRATES	
	(2020) - 3 DRAINAGE INLET TOP UNITS	
	(2020) - 4 DRAINAGE INLET COVER SLAB	
	(2020) - 5 DOUBLE INLET COVER SLAB	
	(2020) - 6 34" X 24" DRAINAGE INLET AND COVER SLAB	
	(2020) - 7 34" X 18" DRAINAGE INLET	
	(2020) - 8 DRAINAGE INLET TOP UNIT, TYPE S (2020) - 9 DOGHOUSE INLET BOX	
D-6	- MANHOLE DETAILS	
D-0		
	(2020) - 2 ROUND MANHOLE ASSEMBLY	
	(2020) - 3 MANHOLE, GRADE RING, TOP UNIT, FRAME AND COVER	
	(2020) - 4 BOX MANHOLE COVER SLAB	
	(2020) - 5 ROUND MANHOLE COVER SLAB	
D-7	- RESERVED	
D-8 (2020)	 PIPE BEDDING AND PIPED FLARED END SUPPORT 	
D-9 (2020)	PERFORATED PIPE UNDERDRAIN	
D-10 (2020) – PIPE PLUGGING	
D-11	- RESERVED	
SHEET NO.	NAME	SECTION IV - EROSION
E 4 (2000)	CONCRETE MACHEUT	
E-1 (2020) E-2	- CONCRETE WASHOUT	
E-Z	- SILT FENCE (2020) - 1 SILT FENCE	
	(2020) - 2 SUPER SILT FENCE	
E-3 (2020)	- SEDIMENT TRAP	
E-4 (2020)	 INLET SEDIMENT CONTROL, DRAINAGE INLET 	
E-5 (2020)	 INLET SEDIMENT CONTROL, CULVERT INLET 	
E-6 (2020)	- PORTABLE SEDIMENT TANK	
E-7 (2014)	- SUMP PIT	
E-8 (2020)	- SKIMMER DEWATERING DEVICE	
E-9	- CHECK DAM	
	(2020) - 1 STONE CHECK DAM (2020) - 2 COMPOST FILTER LOG CHECK DAM	
E-10 (2020		
,	,	



SHEET

OF

6

SHEET NO.	NAME	SECTION IV - EROSION (CONT'D)
-11 -	RESERVED	·
	- RESERVED	
-13	RESERVED	
:-14 (2014) -	STABILIZED CONSTRUCTION ENTRANCE	
-15 (2014) -	SANDBAG DIKE	
-16 (2014) -	SANDDAG DIVERSION	
-17 (2020) <i>-</i>	GEOTEXTIEL EINED CHARMEL DIVERSION	
:-18 (2014) - :-19 (2020) -		
	RIPRAP ENERGY DISSIPATOR	
	STONE OUTLET	
. 22 (2020)	3,3,12,33,12,1	
SHEET NO.	NAME	SECTION V - LANDSCAPING
1 -	PLANT DETAILS	
•	17) - 1 ROADSIDE SHRUB PLANTING	
	17) - 2 TREE PLANTING	
(20	17) - 3 PERENNIAL/GROUND COVER PLANTING	
SHEET NO.	NAME	SECTION VI - MISCELLANEOUS
И-1 (2020) -	RIGHT-OF-WAY FENCE	
M-2 (2017) -	RIGHT-OF-WAY MONUMENTATION	
И-3 (2020) —		
и-4 (2011) —	DUVE DACK LAVOUT	
	WOOD RAIL FENCE	
И-6 (2011) —		CK PAVER
И-7 (2020) —		
	PCC PARKING BUMPER	
	BUS STOP PAD	
•	20) - 1BUS STOP PAD, TYPES 1, 2, & 3	
/ I-10 −		
	BRIDGE SAFETY FENCE 114) - 1 BRIDGE SAFETY FENCE, TYPE 1	
	114) - 2 BRIDGE SAFETY FENCE, TYPE 2	
(20	17) - 3 HARDWARE	
M-11 (2020) ⁻	STEEL PLATE	
И-12 (2020) [–]	DRIVEWAY TRANSVERSE SLOPE GRADING	
И-13 (2020) [–]	TEMPORARY PEDESTRIAN PATHWAY	
SHEET NO.	NAME	SECTION VII - PAVEMENT
P-1 -	- PCC PAVEMENT	
	120) - 1 SLAB PLAN (WITH DOWEL AND TIE LOCATIONS)	
(20	20) - 2 JOINT AND SEALANT	
	20) - 3 W BOLT, HOOK BOLT, DOWEL AND TIE BAR	
•	(20) - 4 DOWEL SUPPORT BASKET	
(20	20) - 5 DOWEL AND TIE BAR PLACEMENT TOLERANCES	



SHEET

4 OF

(

SHEET NO.	NAME	SECTION VII - PAVEMENT (CONT'D)
P-2	- PCC PAVEMENT PAT	rching
	(2020) - 1 FULL DEPTH PATCH	
	(2020) - 2 FULL DEPTH PATCH	\cdot
	•	H, SEALANT DETAILS, GROUT RETENTION DISK, AND DOWEL BAR
		H, DOWEL AND TIE BAR PLACEMENT TOLERANCES ATCH, PLAN AND SECTION VIEWS
P-3 (2014)		
P-4 (2020)		S-ROAD PATCH OVER PIPE TRENCH
	- RUMBLE STRIPS	
(,		ELINE AND CONTINUOUS SHALLOW DEPTH
()	(2020) - 2 BIKE FRIENDLY ED	
P-6 (2020)	 PAVEMENT SAFETY 	EDGE
SHEET NO.	NAME	SECTION VIII - TRAFFIC
T-1	- CONDUIT JUNCTION	
	(2020) - 1 TYPE 1 (2020) - 2 TYPE 4	
	(2020) - 2 TYPE 4	
	(2020) - 4 TYPE 7	
		ROUNDING & BONDING FOR STEEL FRAMES & LIDS
T-3		
T-4	- CABINET BASES	
	(2020) - 1 TYPES M, K, & F (2020) - 2 TYPES "P & R"	
T-5	- POLE BASES	
1-5		DUND BASE WITH SQUARE FOUNDATION HEADER
	•	AND INSTALLATION (BASES 1, 2, 2A, 2B, 3, 3A, AND 3B)
		(BASES 6) AND POLE BASE DATA CHART
T C	DECEDI/ED	(BASE 4A AND 4B), ANCHOR, AND BREAKAWAY COUPLING
T-6 T-7	RESERVEDRESERVED	
T-8		AD-IN WIRE INSTALLATION
1-0		EHIND CURB OR CURB AND GUTTER WITH GRASS STRIP
		EHIND CURB OR CURB & GUTTER WITH SIDEWALK AND JUNCTION WELL DIRECTLY BEHIND CURB OR CURB & GUTTER
	(2020) - 3 JUNCTION WELL IN	
		/ITHOUT CURB OR CURB & GUTTER WITH SIDEWALK AND GRASS STRIPS AND JUNCTION WELL DIRECTLY ADJACENT TO PAVED SURFACE
T-9	- LOOP DETECTOR	ANCHE TYPICAL HOT MAY CUREACT TYPICAL CECTION. AND CRUCE WE
	(2020) - 1 LOOP DETECTOR'S	AWCUT TYPICAL, HOT MIX SURFACE TYPICAL SECTION, AND SPLICE KIT TION LAYOUT
	•	SING TYPICAL LAYOUT
	(2020) - 4 WIRING COLOR CO	
T-10	- RESERVED	
T-11	 MESSENGER WIRE A 	
		ESSENGER WIRE ATTACHMENT ON WOOD POLES
T 12	•	IEDIATE MESSENGER WIRE ATTACHMENT
T-12	- SPAN WIRES (2020) - 1 ATTACHMENT BET	TWEEN POLES
	•	NGER WIRE ATTACHMENT
	(2020) - 3 SPAN WIRE ASSEN	
T-13	DECEDVED	



SHEET

OF


6


SHEET NO.	NAME	SECTION VIII - TRAFFIC (CONT'D)
T-14	(2020) - 1 UPF	NCY PREEMPTION RECIEVER RIGHT MOUNT /ERTED MOUNT
T-15 (2013 T-16 (2020 T-17) – PERMANI	VAY SIGN POST AND PIN ASSEMBLY DETAILS ENT WOOD BARRICADE AL SERVICE PEDESTAL - LIGHTING, SIGNAL & 'ITMS' COMPONENT INSTALLATIONS
	(2020) - 1 100 (2020) - 2 100	O AMP (3+ DEVICES). O AMP (CONDENSED) O AMP (UP TO 2 DEVICES).
T-18	(2020) - 5 LIGI - PEDESTRI (2020) - 1 PUS	O AMP - STANDARD LIGHTING COMPONENT INSTALLATIONS HTING COMPONENT INSTALLATIONS (12 OR LESS FIXTURES) IAN PUSHBUTTON LOCATION SHBUTTON ASSEMBLY LOCATION ON POLE SIN ATTACHMENT


SCALE: NTS


	BARRIER LEGEND							
ITEM NO.	DESCRIPTION							
1	W-BEAM							
2	W6 X 9 STEEL POST							
	(3A)- 6" x 12" x 14" OFFSET BLOCK							
(3A) (3B)	3B)- 6" x 8" x 14" OFFSET BLOCK							
4	SPLICE - REQUIRES EIGHT(8) %" GUARDRAIL BOLTS (L=1½") WITH RECESS NUTS							
5	W-BEAM TERMINAL CONNECTOR							
6	%" GUARDRAIL BOLT (L=1¼") AND RECESS NUT							
	7A)- ¾" GUARDRAIL BOLT (L=14") AND RECESS NUT							
$\begin{array}{c c} (7A) & (7B) \end{array}$	7B- %" GUARDRAIL BOLT (L=10") AND RECESS NUT							
8	%" GUARDRAIL BOLT (L=10"), STEEL WASHER, AND RECESS NUT							
9	%" HIGH STRENGTH STRUCTURAL HEX BOLT (L=VARIES) AND HEX NUT							
10	%" CARRIAGE BOLT (L=VARIES), STEEL WASHER, AND HEX NUT							
11)	BEARING PLATE							

DELAWARE		BARRIER	LEGEND	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	5/31/2017 DATE			
DEPARTMENT OF TRANSPORTATION	STANDARD NO.	B-L (2017)	SHT.	1	OF	1	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER	5/18/2017 DATE

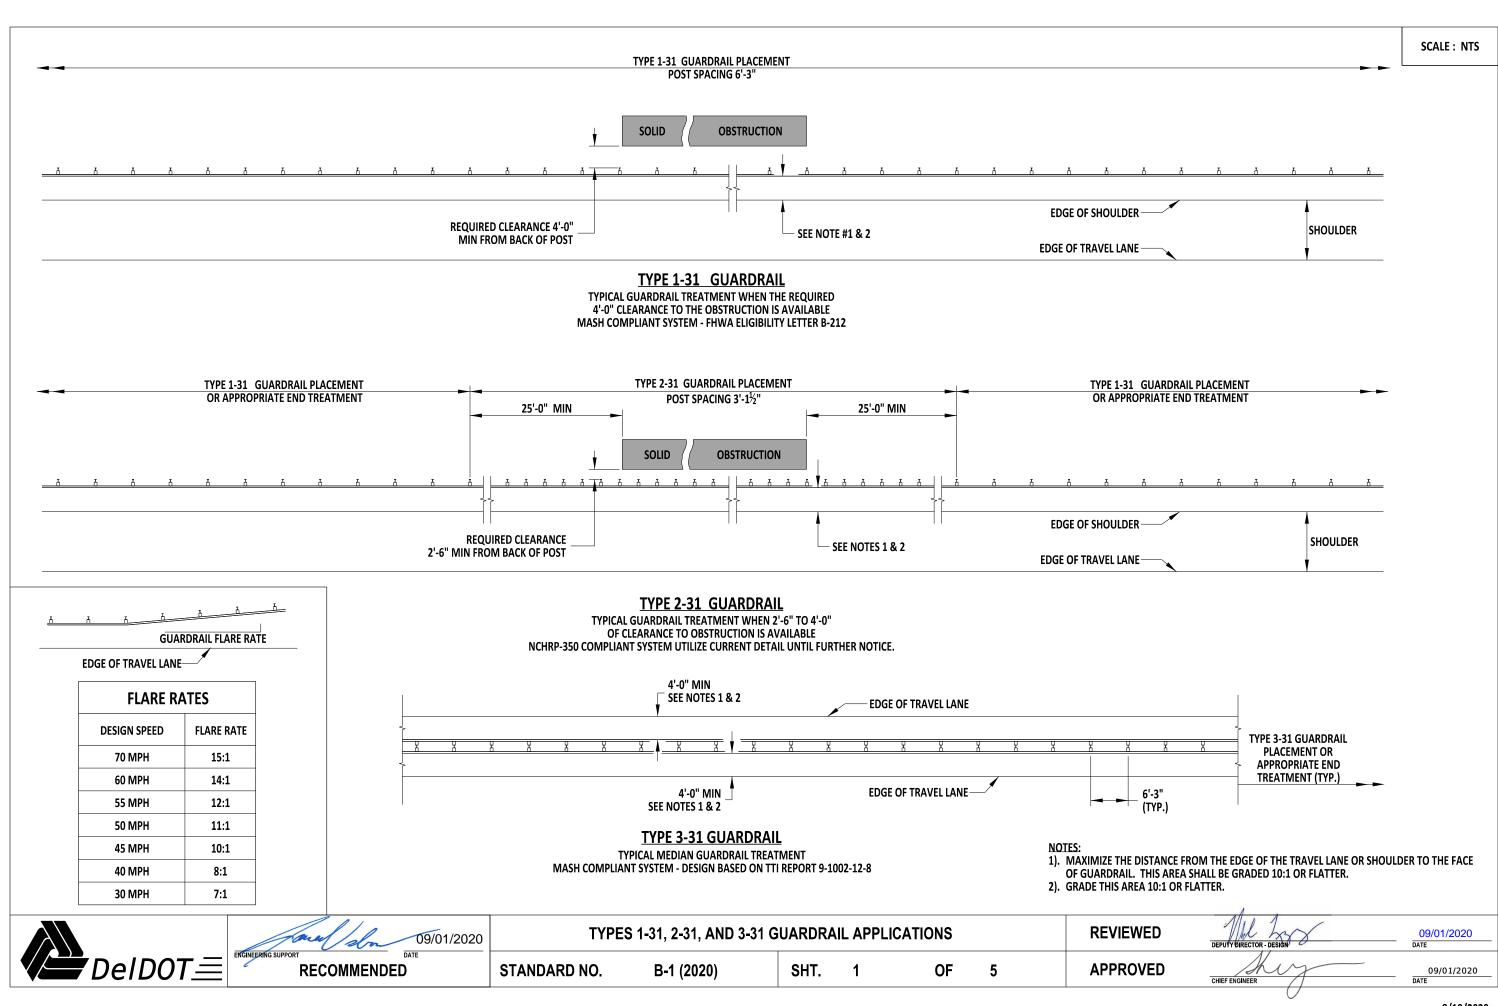


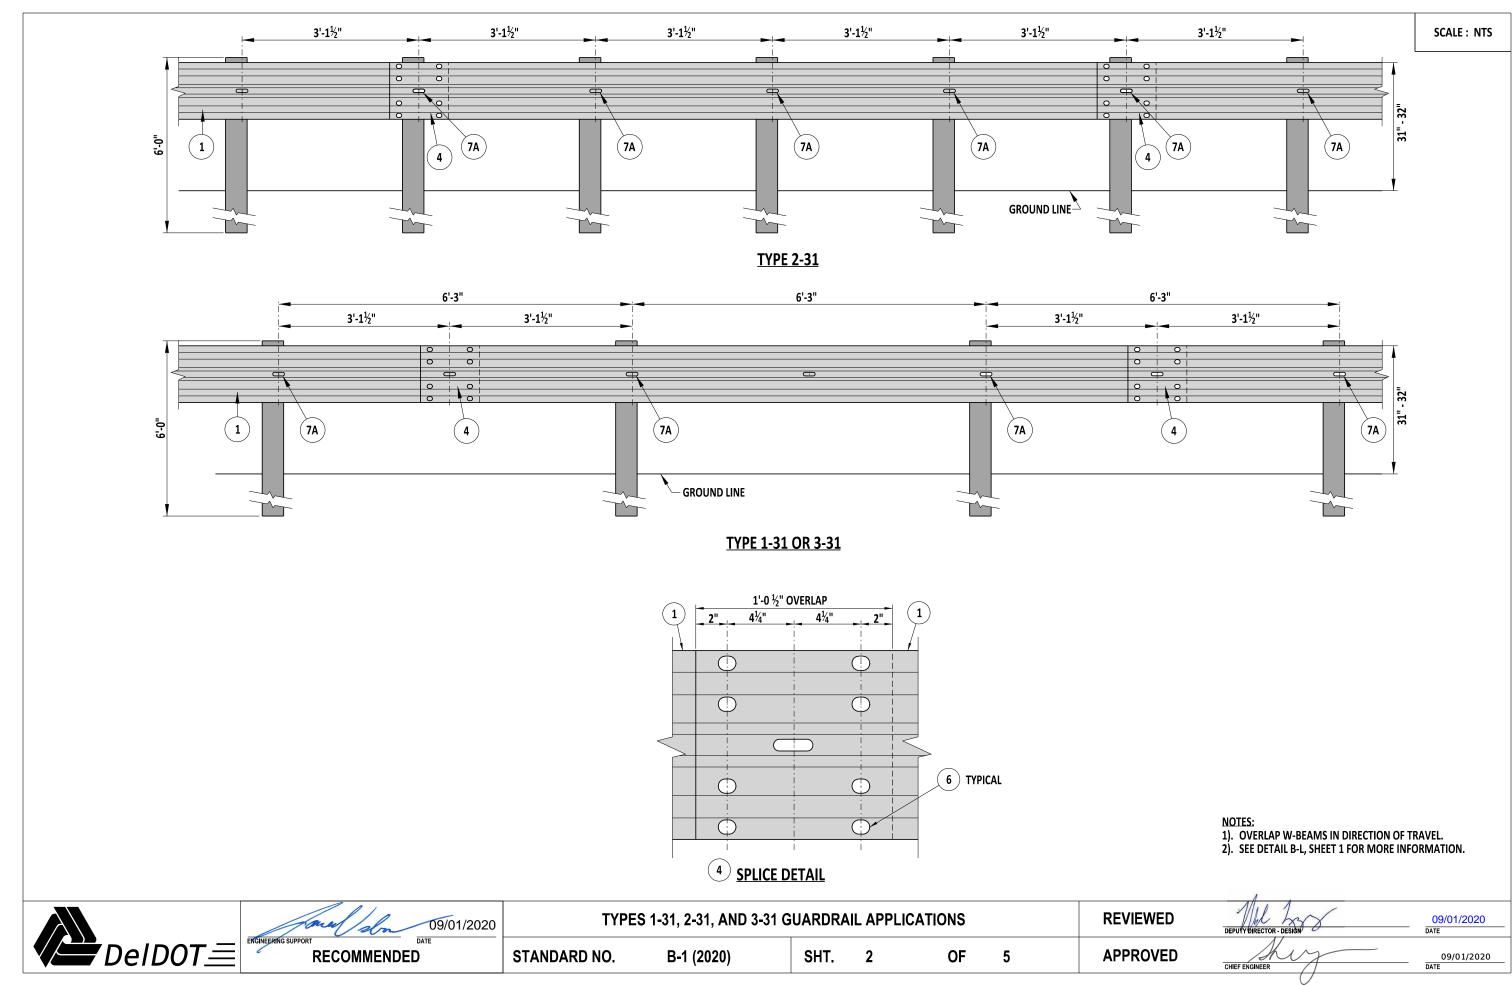

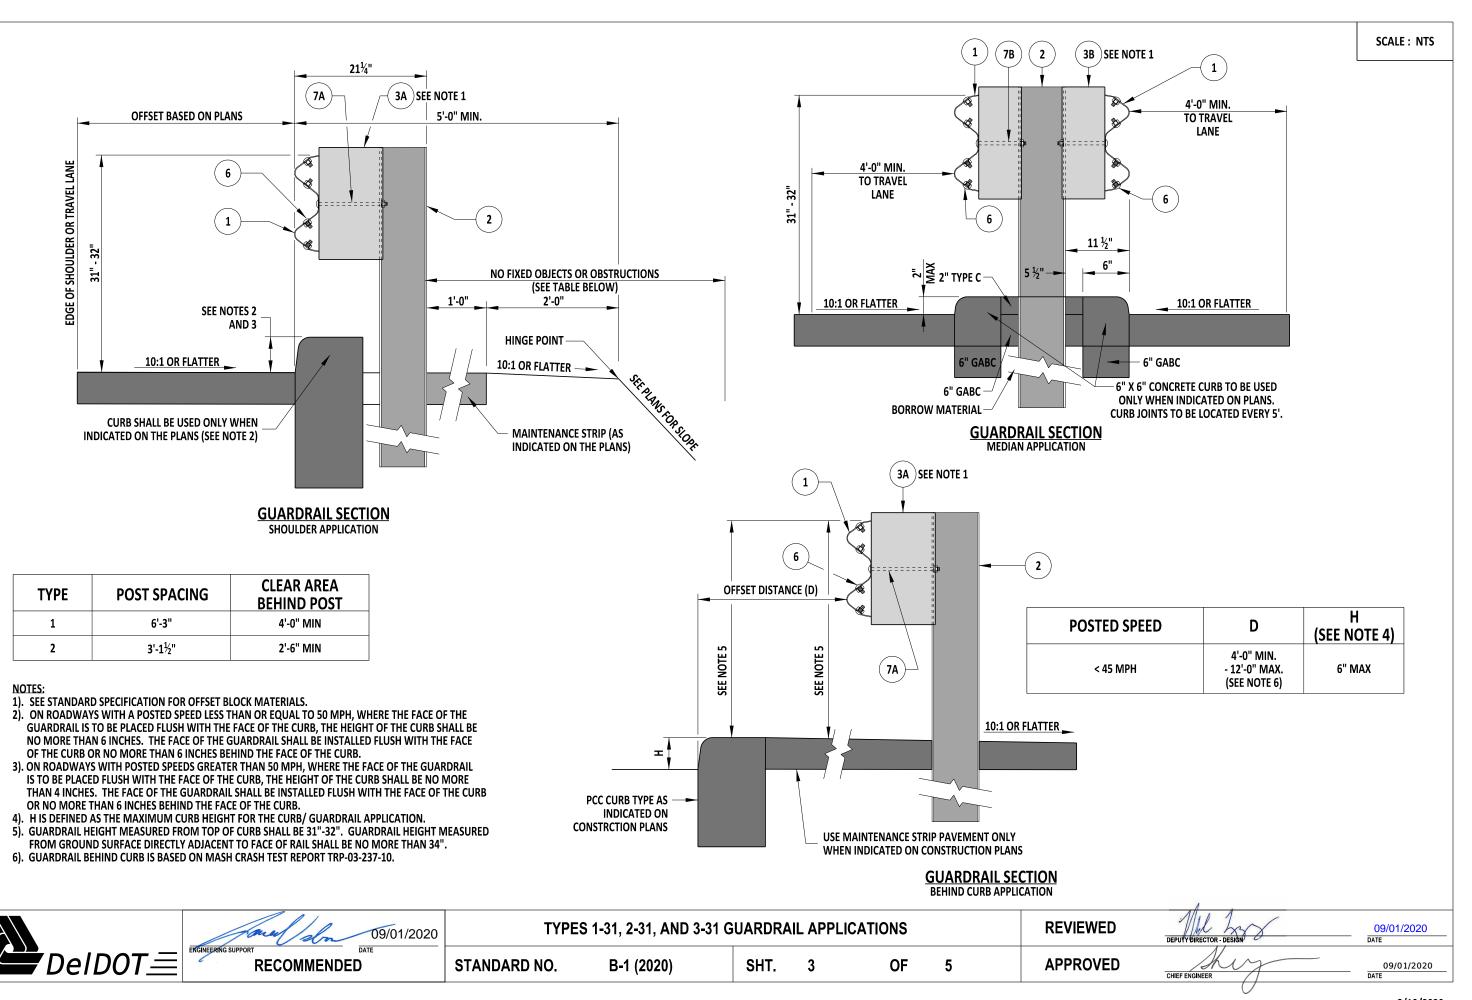


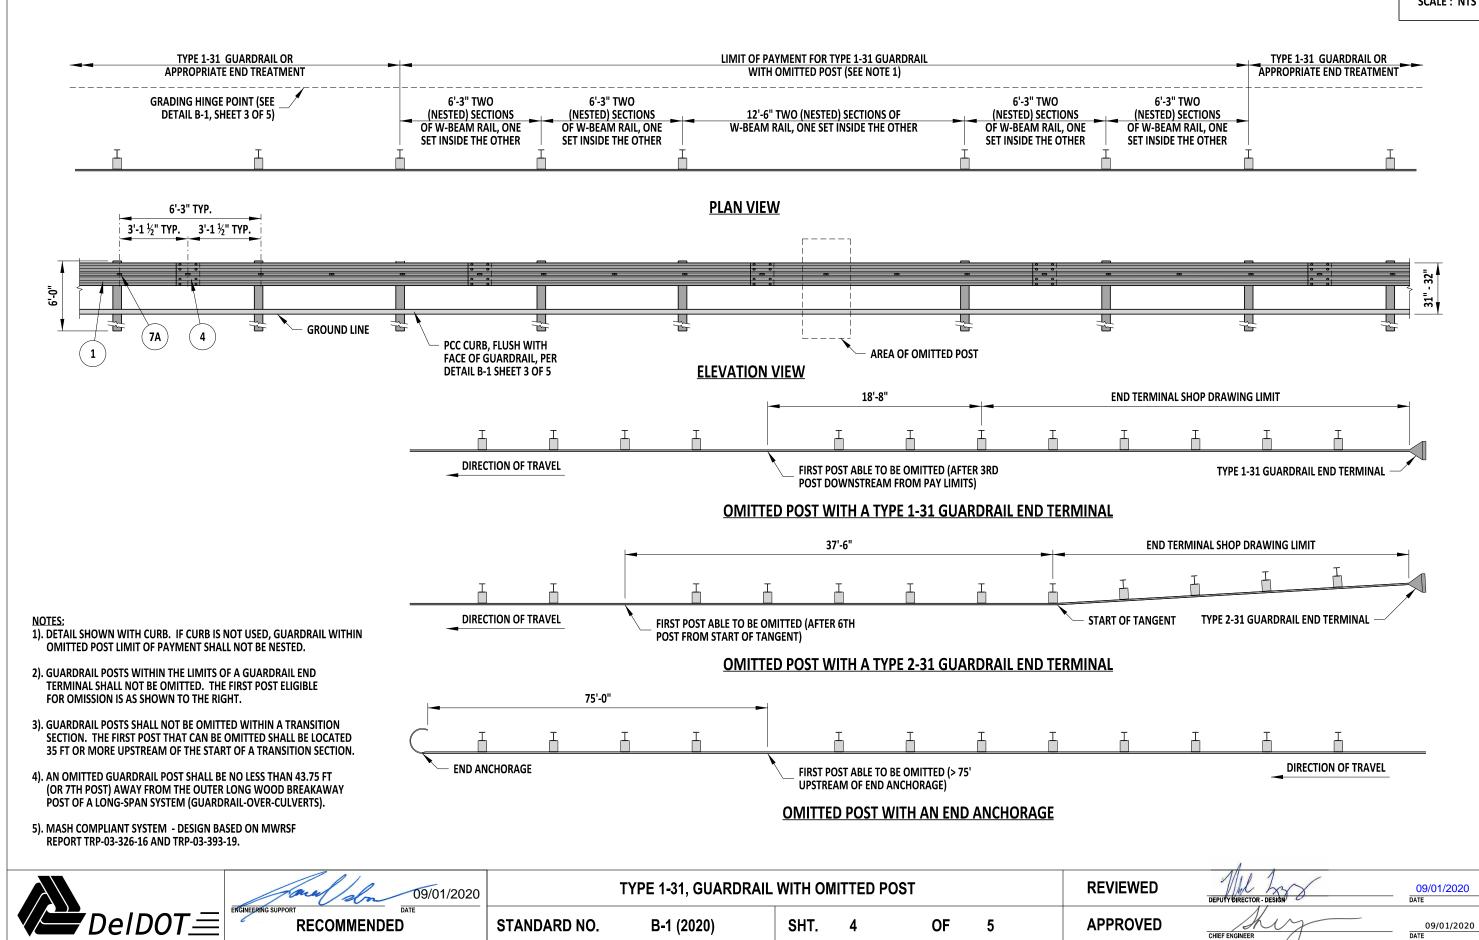



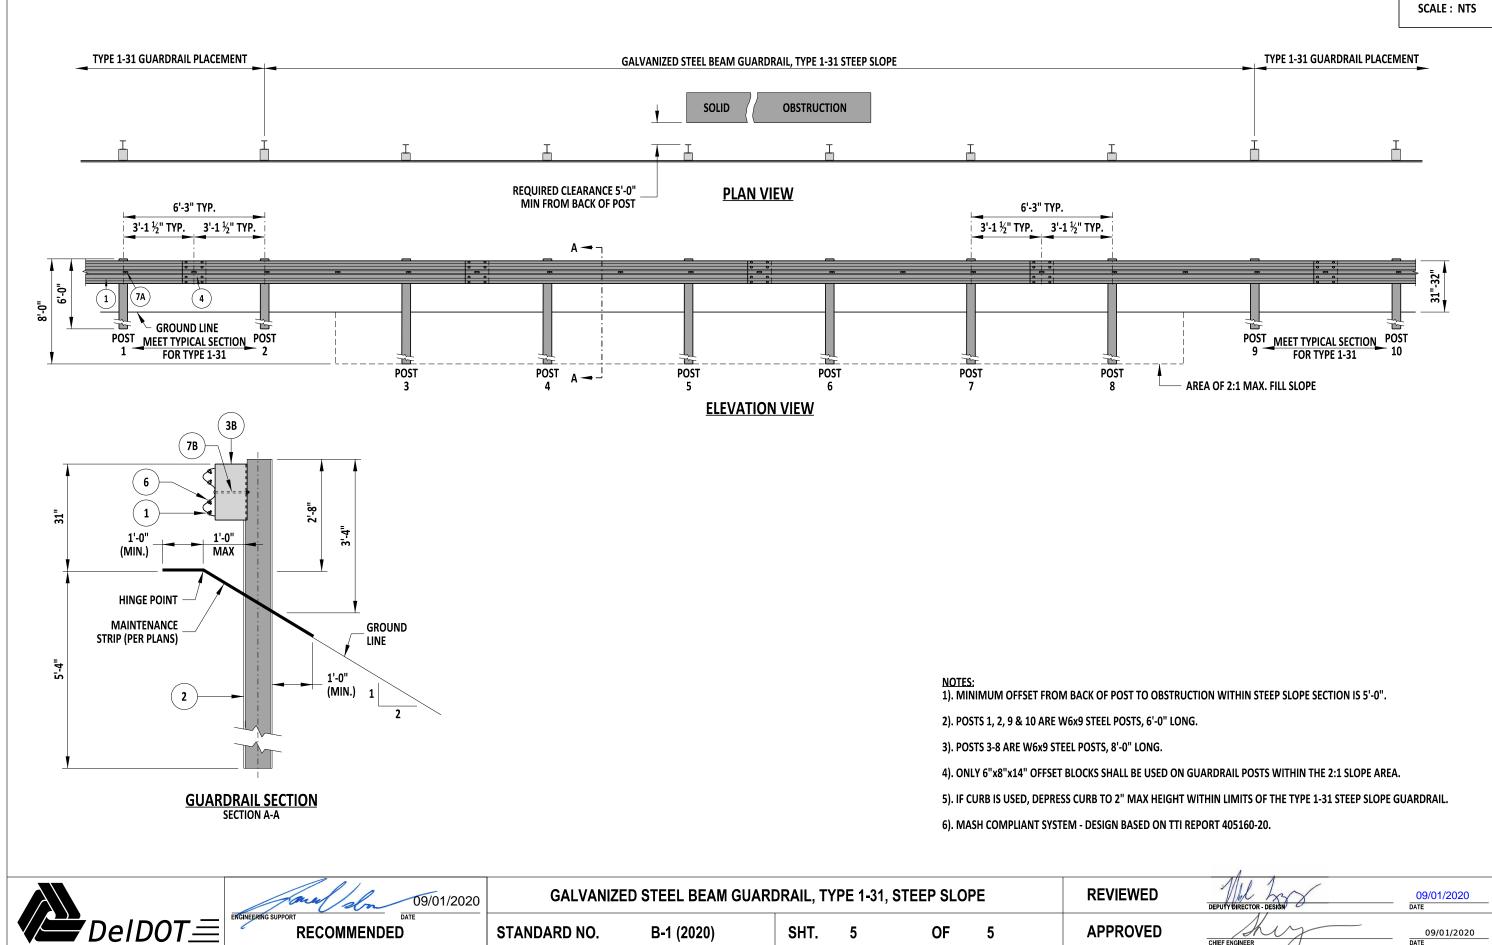



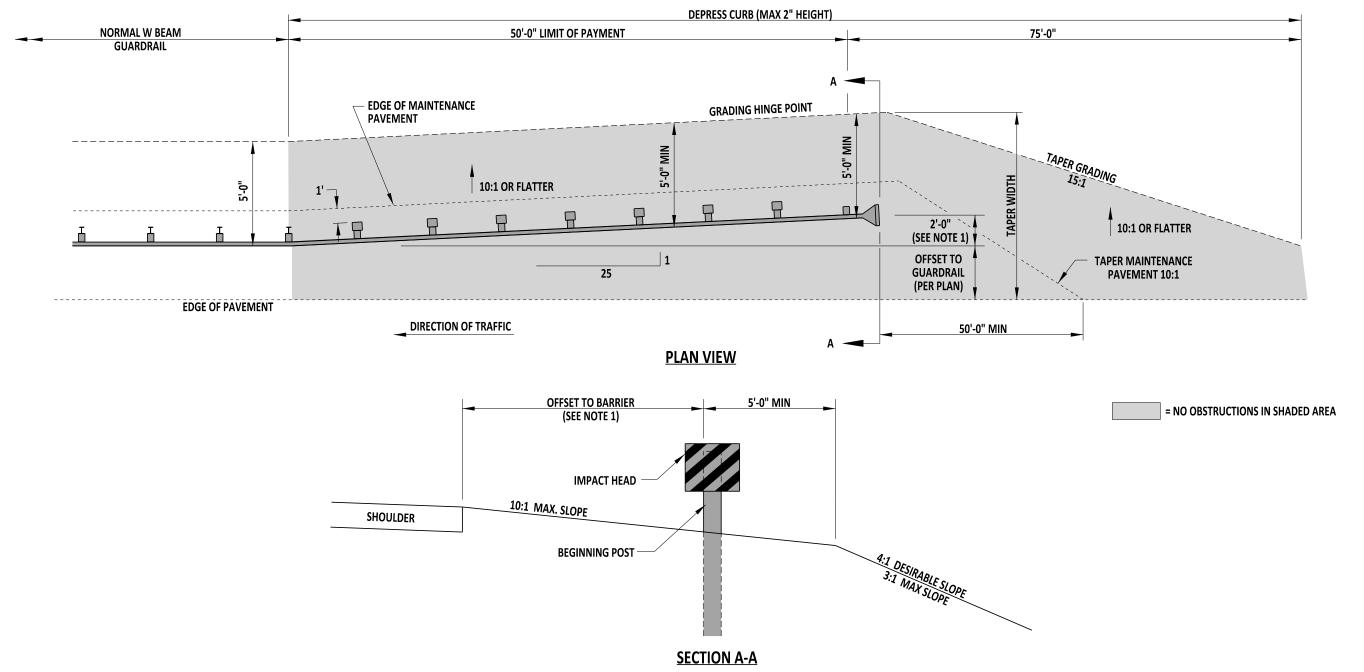

NOTES:

- 1). FLARE THE END TREATMENT AT 25:1 BEGINNING 50'-0" FROM THE END OF THE IMPACT HEAD, UNLESS THE CONSTRUCTION PLANS OR SPECIFICATIONS SPECIFY A SMALLER FLARE.
- 2). THIS DETAIL WAS SOLELY CREATED TO SHOW THE GRADING REQUIRED FOR THIS TYPE OF GUARDRAL END TREATMENT AND IS APPLICABLE IN THE ABSENCE OF SPECIFIC GRADING REQUIREMENTS FROM THE GUARDRAIL END TREATMENT MANUFACTURER.
- 3). THE GUARDRAIL END TREATMENT SHALL BE INSTALLED AS PER THE MANUFACTURER'S REQUIREMENTS.
- 4). IF CURB IS PRESENT, DEPRESS THE CURB TO A MAXIMUM HEIGHT OF 2" WITHIN THE LIMITS OF THE END TREATMENT AND THROUGHOUT THE LENGTH OF THE TAPER GRADING.
- 5.) GUARDRAIL REFLECTORS SHALL NOT BE PLACED WITHIN THE LIMITS OF THE GUALRDRAIL END TREATMENT.



NGINEERING SUPPORT DATE

RECOMMENDED


GRADING FOR GUARDRAIL END TREATMENT ATTENUATOR, TYPE 1


STANDARD NO. B-2 (2020) SHT. 1 OF 3

REVIEWED


09/01/2020 DATE

APPROVED

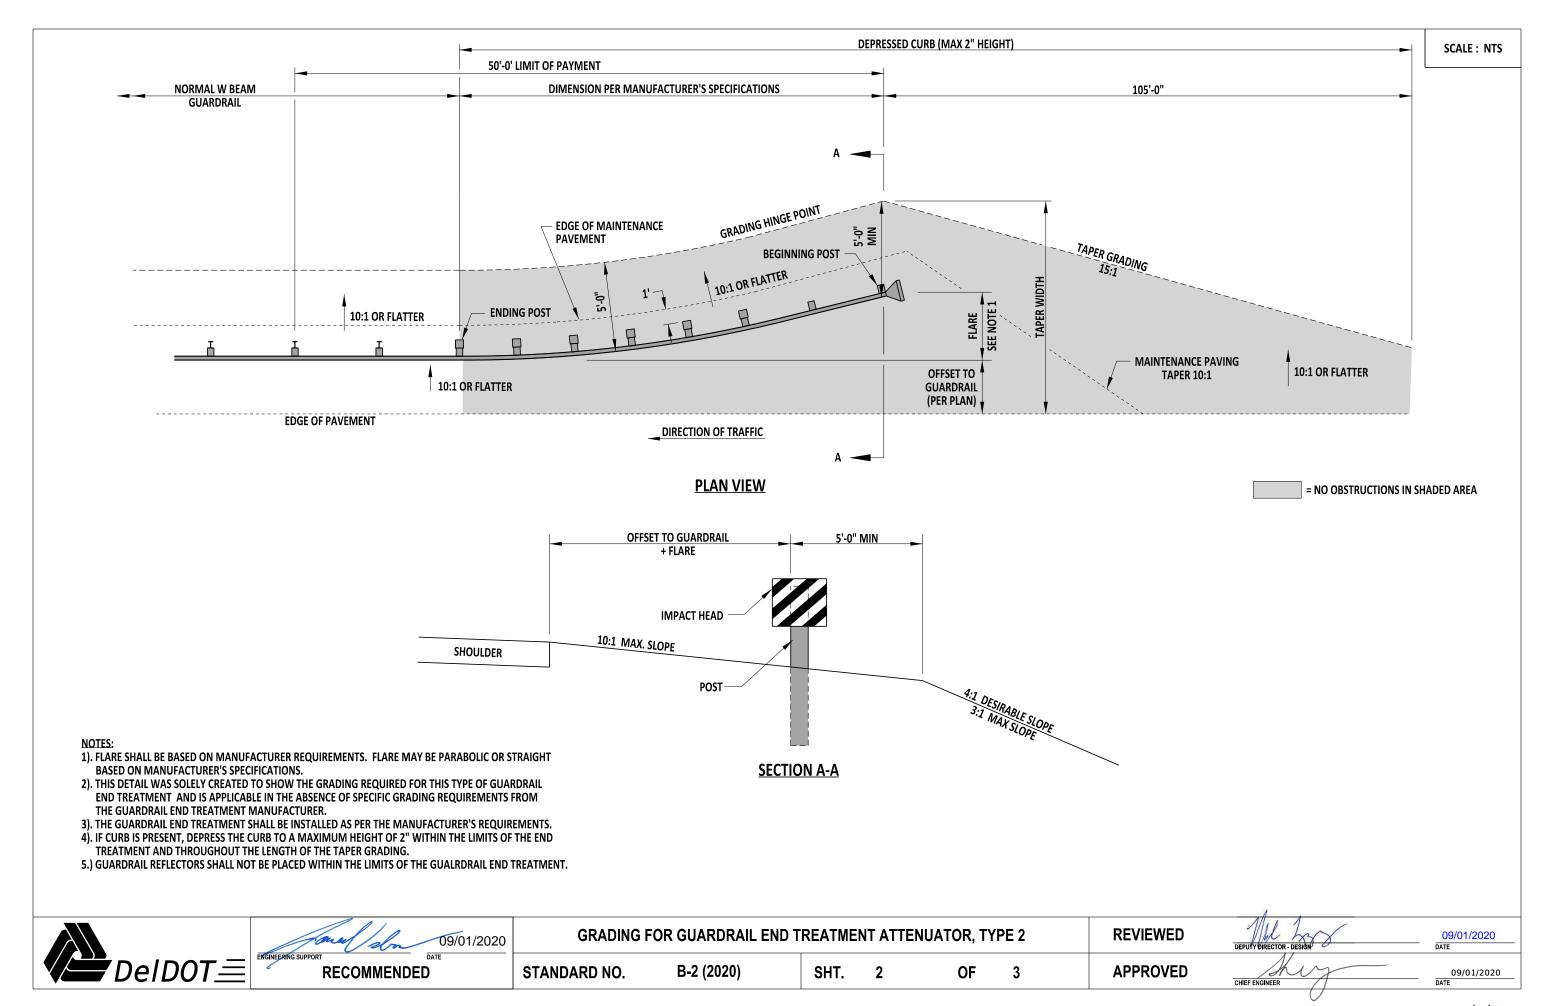

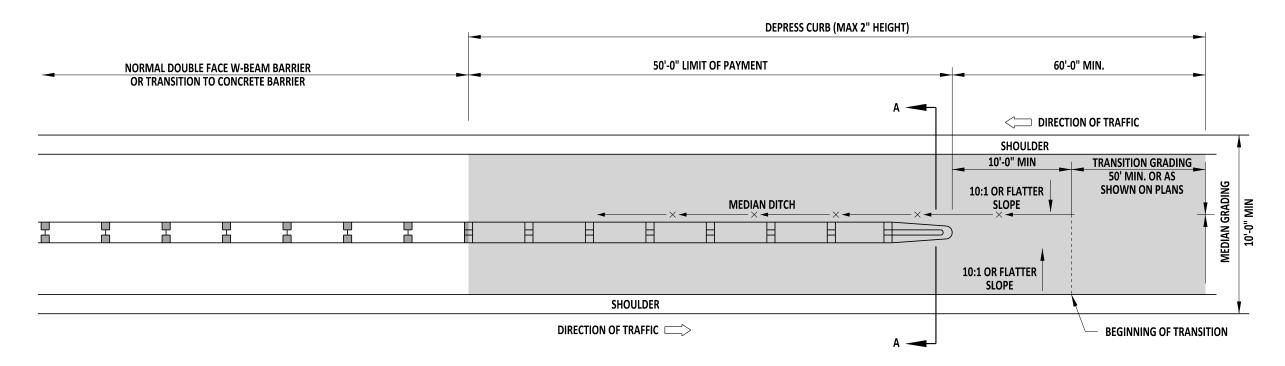

PLAN VIEW

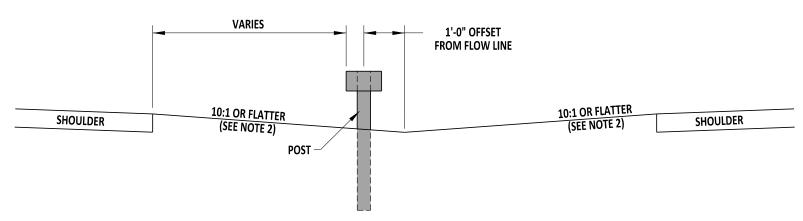

SECTION A-A GRADING FOR END TREATMENT ATTENUATOR, TYPE 3

- 1). THIS DETAIL WAS SOLELY CREATED TO SHOW THE GRADING REQUIRED FOR THIS TYPE OF GUARDRAIL END TREATMENT AND IS APPLICABLE IN THE ABSENCE OF SPECIFIC GRADING REQUIREMENTS FROM THE **GUARDRAIL END TREATMENT MANUFACTURER.**
- 2). 6:1 OR FLATTER GRADING IS ALLOWABLE WHEN THE BARRIER IS LOCATED 12' OR MORE FROM THE OUTSIDE EDGE OF THE SHOULDER.
- 3). THIS END TREATMENT CAN ALSO BE USED IN RAMP GORES OR OTHER AREAS WHERE TWO RAILS OF W-BEAM COME TOGETHER AND TERMINATE WITH ONE END TREATMENT.
- 4). WHEN OPPOSING ROADWAYS HAVE EQUAL ELEVATIONS THE TRAFFIC BARRIER SYSTEM SHOULD BE PLACED ON THE OPPOSITE SIDE OF THE DITCH LINE FROM APPROACHING TRAFFIC.
- 5). THE GUARDRAIL END TREATMENT SHALL BE INSTALLED AS PER THE MANUFACTURER'S REQUIREMENTS.
- 6). IF CURB IS PRESENT, DEPRESS THE CURB TO A MAXIMUM HEIGHT OF 2" WITHIN THE LIMITS OF THE END TREATMENT AND THROUGHOUT THE LENGTH OF THE TRANSITION GRADING.
- 7.) GUARDRAIL REFLECTORS SHALL NOT BE PLACED WITHIN THE LIMITS OF THE GUARDRAIL END TERMINAL.



09/01/2020 **RECOMMENDED**

GRADING FOR GUARDRAIL END TREATMENT ATTENUATOR, TYPE 3

REVIEWED


APPROVED


09/01/2020

STANDARD NO.

B-2 (2020)

SHT. 3 OF 3

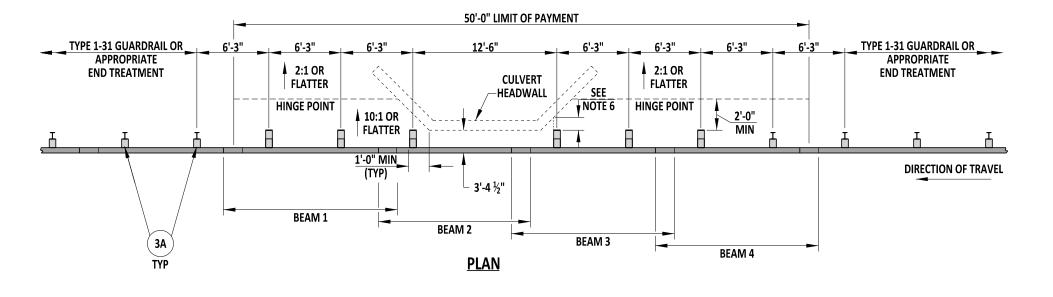

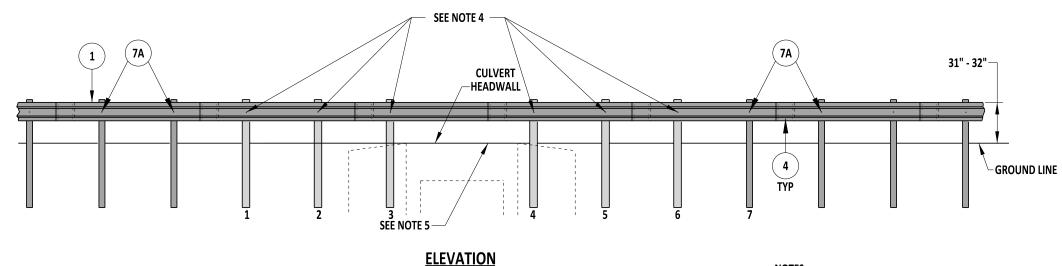



NOTES

- 1). ALL W-BEAMS ARE 13'- $6\frac{1}{2}$ " IN LENGTH.
- 2). PLACE GUARDRAIL DELINEATORS IN ACCORDANCE WITH DETAIL B-13, SHEET 9.
- 3). POSTS 1 THROUGH 6 ARE TO BE TYPE 31 LONG, WOOD BREAKAWAY POSTS. POST 7 IS TO BE A W6x9, 6'-0" STEEL POST.
- 4). THE RAIL SHALL BE ATTACHED AT POSTS 1 THROUGH 6 WITH A %" x 22" GUARDRAIL BOLT, STEEL WASHER, AND RECESS NUT.
- 5). CULVERT HEADWALL SHALL NOT EXTEND MORE THAN 2" ABOVE GRADE.
- 6). THERE SHALL BE A MINIMUM OF 12" FROM THE BACK OF POST TO THE CULVERT WINGWALLS.
- 7). IF CURB IS USED, IT SHALL BE A MAX 2" HEIGHT WITHIN THE LIMIT OF PAYMENT OF THE GUARDRAIL OVER CULVERT.
- 8). MASH COMPLIANT SYSTEM FHWA ELIGIBILITY LETTER B-189




Jacob Son 09/01/2020		GUARDRAIL OVER CU	ILVERTS,	TYPE 1-3	31		REVIEWED	DEPUTY BIRECTOR - DESIGN	09/01/2020
RECOMMENDED	STANDARD NO.	B-3 (2020)	SHT.	1	OF	3	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

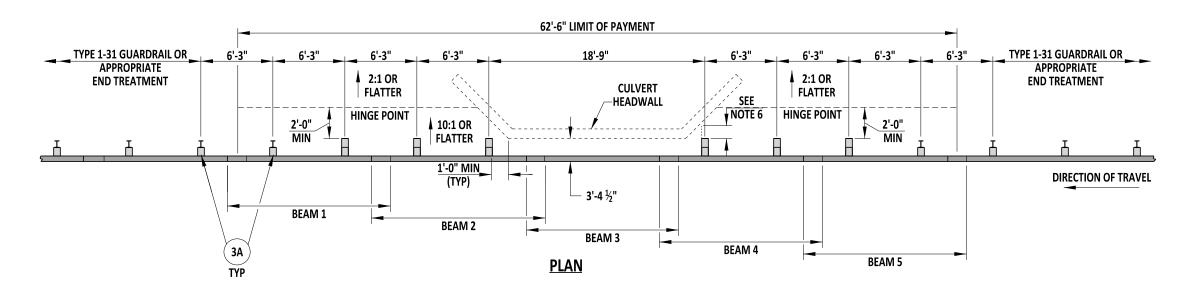

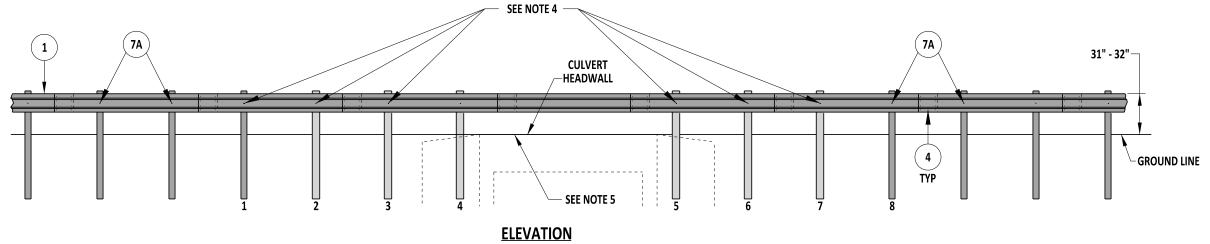



NOTES

- 1). ALL W-BEAMS ARE 13'-6½" IN LENGTH.
- 2). PLACE GUARDRAIL DELINEATORS IN ACCORDANCE WITH DETAIL B-13, SHEET 9.
- 3). POSTS 1 & 8 ARE TO BE W6x9, 6'-0" STEEL POSTS. POSTS 2 THROUGH 7 ARE TO BE TYPE 31 LONG, WOOD BREAKAWAY POSTS.
- 4). THE RAIL SHALL BE ATTACHED AT POSTS 2 THROUGH 7 WITH A \(\frac{5}{8}\)" x 22" GUARDRAIL BOLT, STEEL WASHER, AND RECESS NUT.
- 5). CULVERT HEADWALL SHALL NOT EXTEND MORE THAN 2" ABOVE GRADE.
- 6). THERE SHALL BE A MINIMUM OF 12" FROM THE BACK OF POST TO THE CULVERT WINGWALL.
- 7). IF CURB IS USED, IT SHALL BE A MAX 2" HEIGHT WITHIN THE LIMIT OF PAYMENT OF THE GUARDRAIL OVER CULVERT.
- 8). MASH COMPLIANT SYSTEM FHWA ELIGIBILITY LETTER B-189




09/01/2020

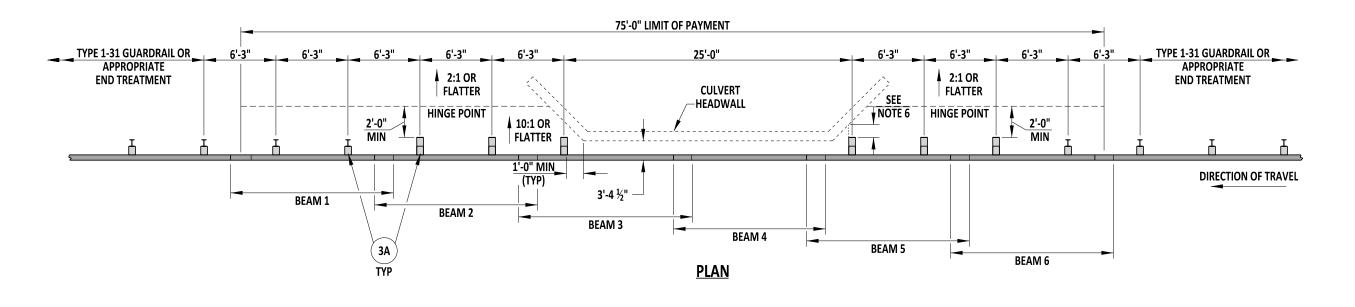


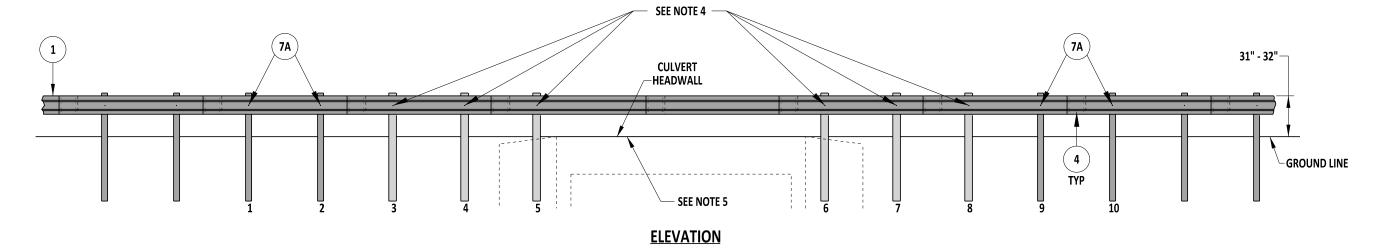

NOTES:

- 1). ALL W-BEAMS ARE $13'-6\frac{1}{2}"$ IN LENGTH.
- 2). PLACE GUARDRAIL DELINEATORS IN ACCORDANCE WITH DETAIL B-13, SHEET 9.
- 3). POSTS 1, 2, 9, & 10 ARE TO BE W6x9, 6'-0" STEEL POSTS. POSTS 3 THROUGH 8 ARE TO BE TYPE 31 LONG, WOOD BREAKAWAY POSTS.
- 4). THE RAIL SHALL BE ATTACHED AT POSTS 3 THROUGH 8 WITH A \(\frac{5}{8}\)" x 22" GUARDRAIL BOLT, STEEL WASHER, AND RECESS NUT.
- 5). CULVERT HEADWALL SHALL NOT EXTEND MORE THAN 2" ABOVE GRADE.
- 6). THERE SHALL BE A MINIMUM OF 12" FROM THE BACK OF POST TO THE CULVERT WINGWALLS.
- 7). IF CURB IS USED, IT SHALL BE A MAX 2" HEIGHT WITHIN THE LIMIT OF PAYMENT OF THE GUARDRAIL OVER CULVERT.
- 8). MASH COMPLIANT SYSTEM FHWA ELIGIBILITY LETTER B-189



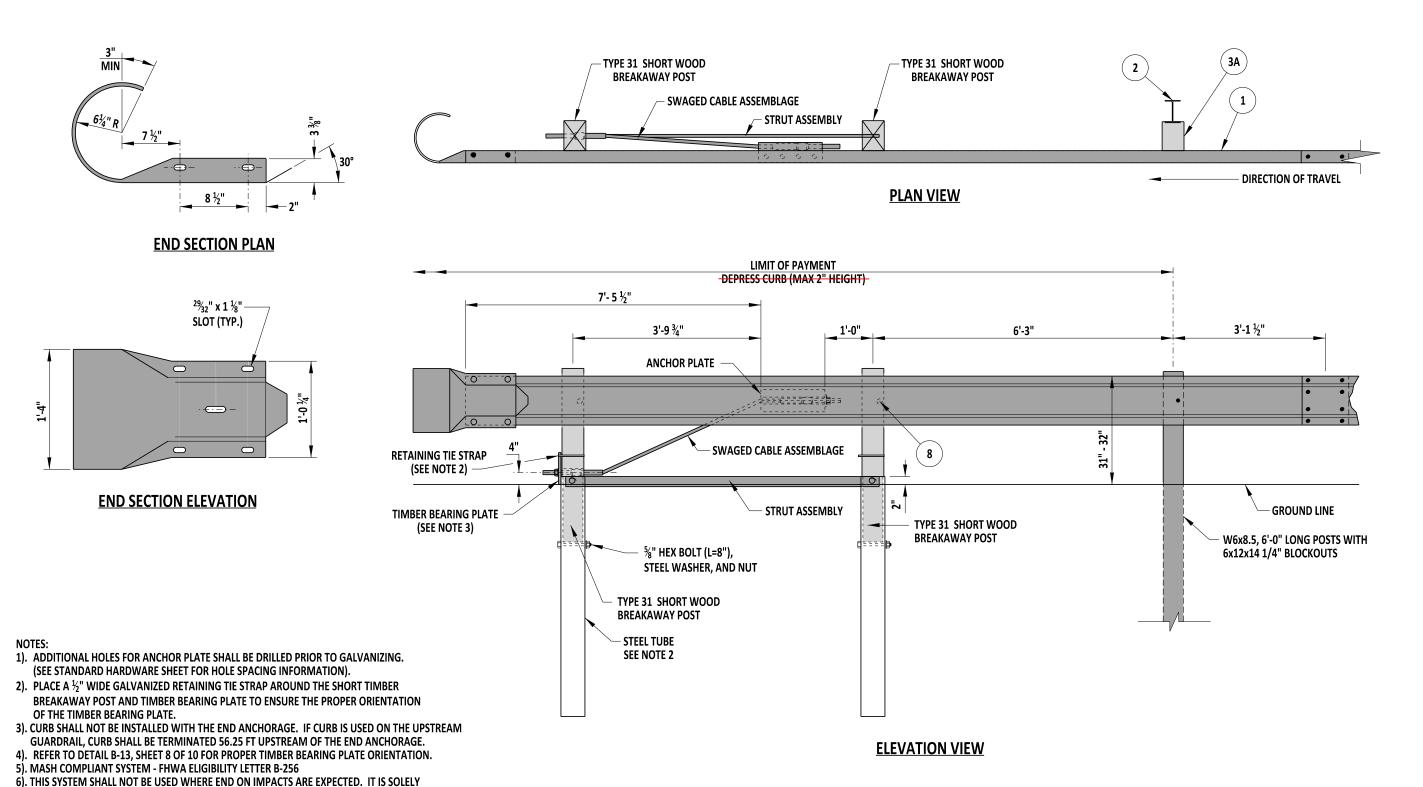



DESIGNED TO ACT AS A DOWNSTREAM END ANCHOR.

GINEERING SUPPORT DATE

RECOMMENDED

STANDARD NO.

END ANCHORAGE, TYPE 31

SHT.

B-4 (2020)

OF 1

REVIEWED

APPROVED


09/01/2020 DATE

> 09/01/2020 DATE

> > 8/19/2020


SCALE: NTS


B-5 DETAIL RESERVED LEFT BLANK FOR FUTURE



SCALE: NTS


B-6 DETAIL RESERVED LEFT BLANK FOR FUTURE




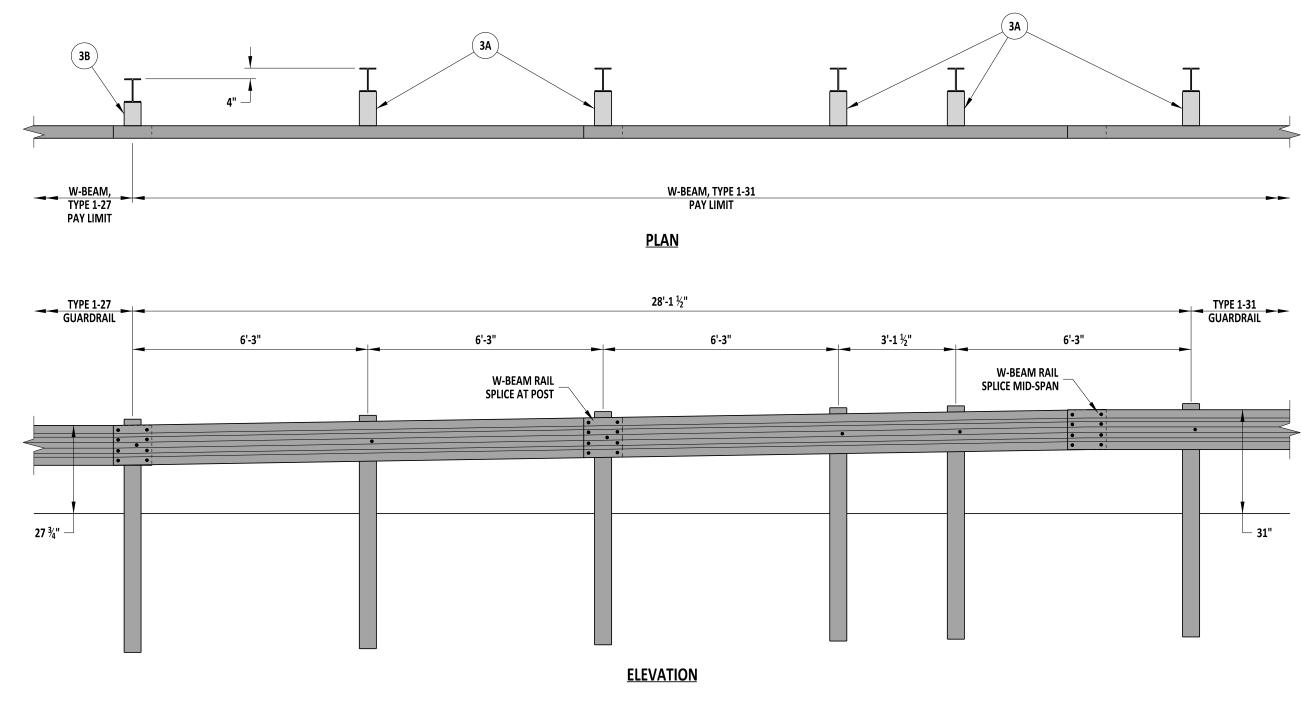


- NOTES: 1). ALL OFFSET BLOCKS WITHIN THE 25' SECTION SHALL BE TYPE 3B (8" OFFSET). 2). IF CURB IS USED, FOLLOW DETAIL B-1, SHEET 3 OF 5 AND DETAIL B-15, SHEET 3 OF 3.

Janel Son 09/01/202	\	AM, TYPE 1-27 TO TYP	E 1-31 TRA	NSITIO	N SECTION		REVIEWED	DEPUTY DIRECTOR - DESIGN	09/01/2020 Date
DeIDOT RECOMMENDED	STANDARD NO.	B-7 (2020)	SHT.	1	OF	1	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

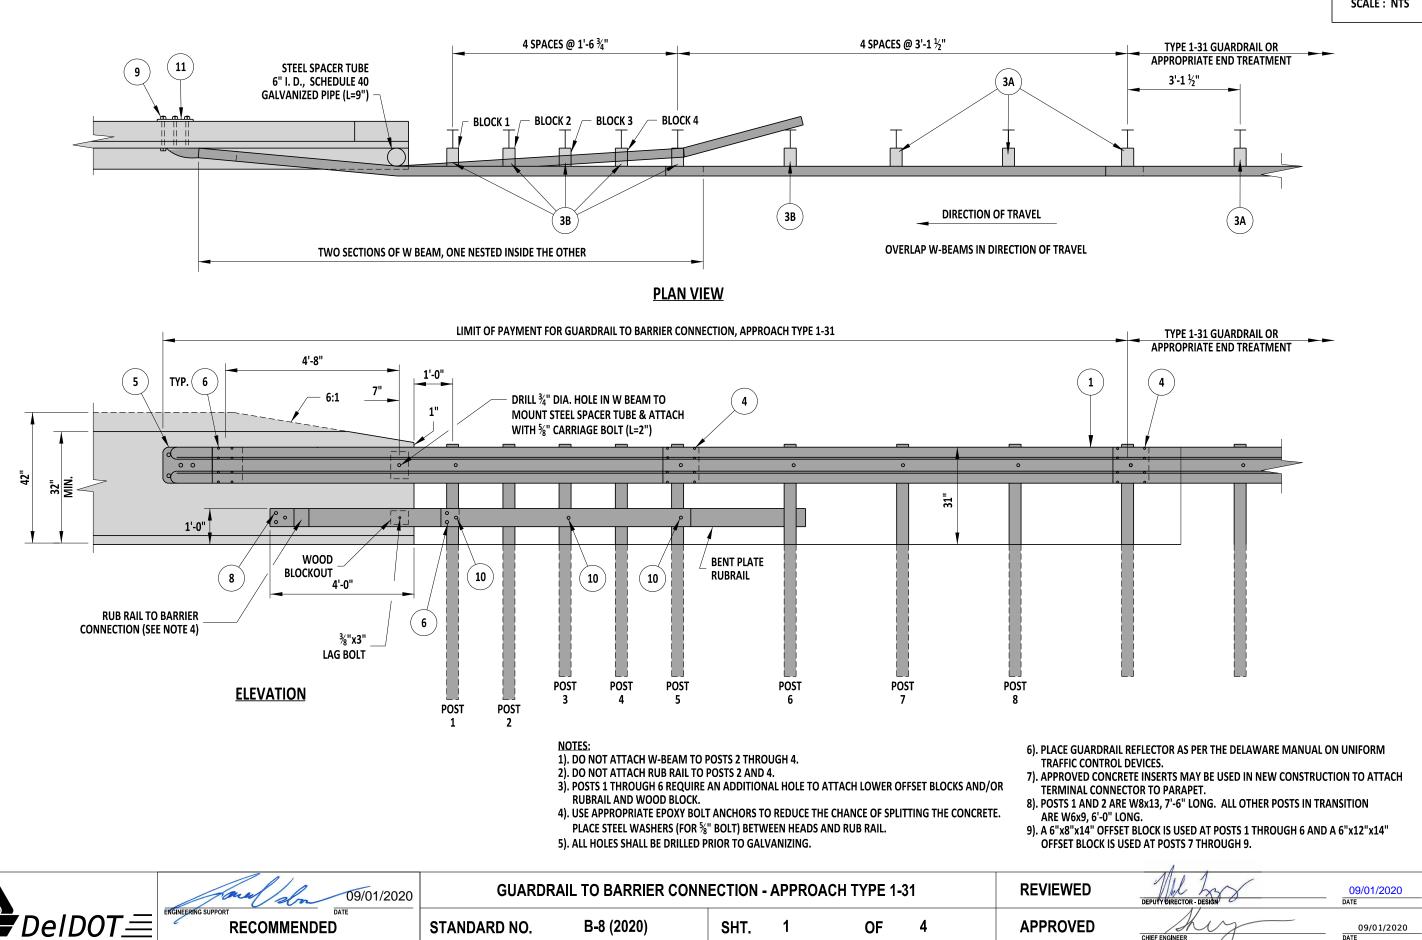

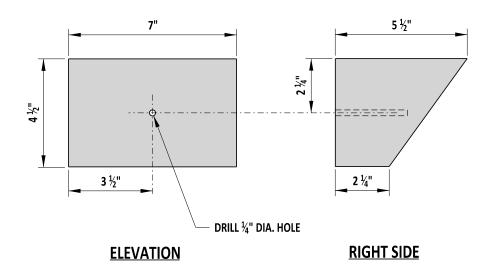


OFFSET BLOCK DETAIL

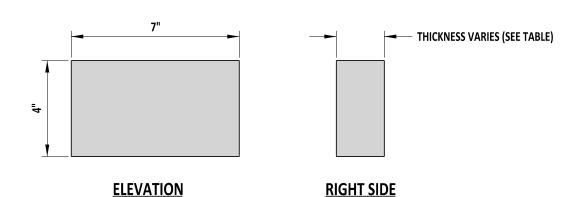

RUB RAIL OFFSET BLOCKS

RUB RAIL OFFSET BLOCKS (7"x4")						
POST NO.	THICKNESS	BOLT LENGTH				
1	4 1/4"	6"				
2	3 1/4"	4"				
3	2"	4"				
4	1"	2"				

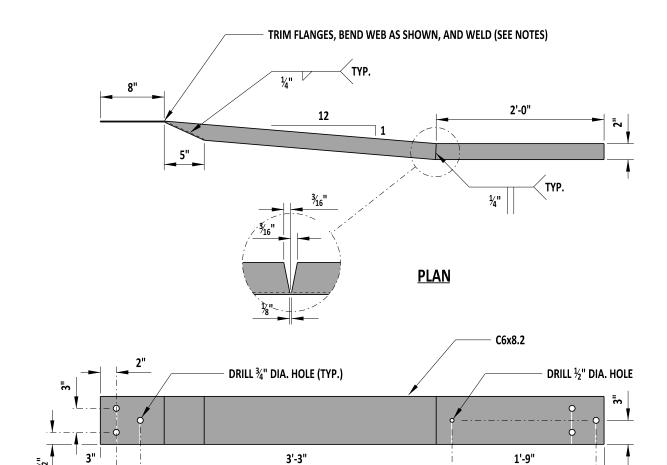

ELEVATION

5'-6"

RUB RAIL TO BARRIER CONNECTION

- 1). THE RUB RAIL TO BARRIER CONNECTION END MUST BE ATTACHED FLUSH WITH THE SLOPED TOE OF THE SAFETY BARRIER. INSTALLATION CAN BE SIMPLIFIED BY FABRICATING OR SHOP TWISTING THE RUB RAIL END TO BE CONSISTENT WITH THE SLOPE OF THE BARRIER, HOWEVER, FIELD BENDING USING HEAT IS PERMITTED.
- 2). STEEL SPACER TUBE IS SCHEDULE 40 GALVANIZED PIPE, 6"x9".
 3). ALL HARDWARE ON THIS DETAIL IS COMPATIBLE WITH GUARDRAIL TO BARRIER CONNECTION, TYPES 1-31 AND 1-27.



09/01/2020 RECOMMENDED

GUARDRAIL TO BARRIER CONNECTION, TYPE 1 HARDWARE STANDARD NO.

B-8 (2020)

SHT. 2


OF

REVIEWED

09/01/2020

APPROVED



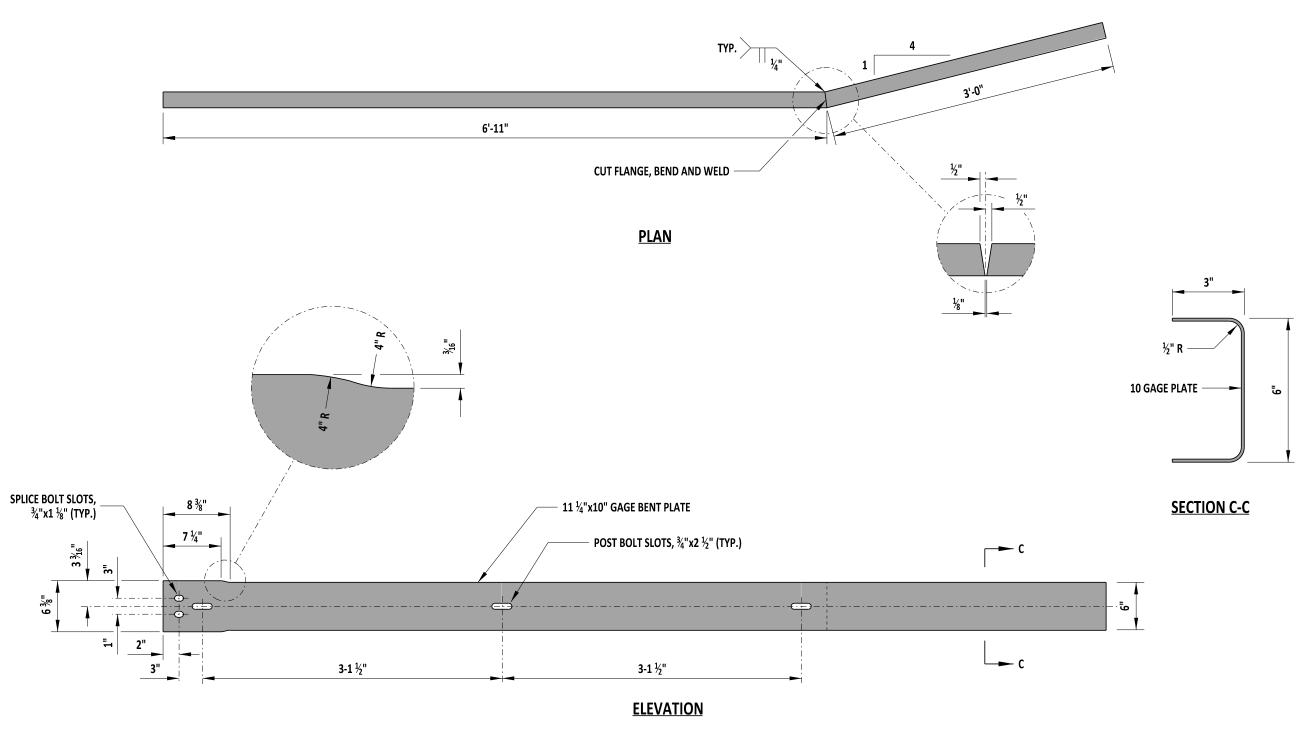

NOTE:

1). ALL HARDWARE ON THIS DETAIL IS COMPATIBLE WITH GUARDRAIL TO BARRIER CONNECTION, TYPES 1-31 AND 1-27.



faul /se	09/01/2020			
ENGINEERING SUPPORT	DATE			
RECOMMENDED				


GUARDRAIL TO BARRIER CONNECTION, BENT PLATE RUB RAIL STANDARD NO. B-8 (2020) SHT. 3


OF

REVIEWED APPROVED

09/01/2020 DATE 09/01/2020 DATE

8/19/2020

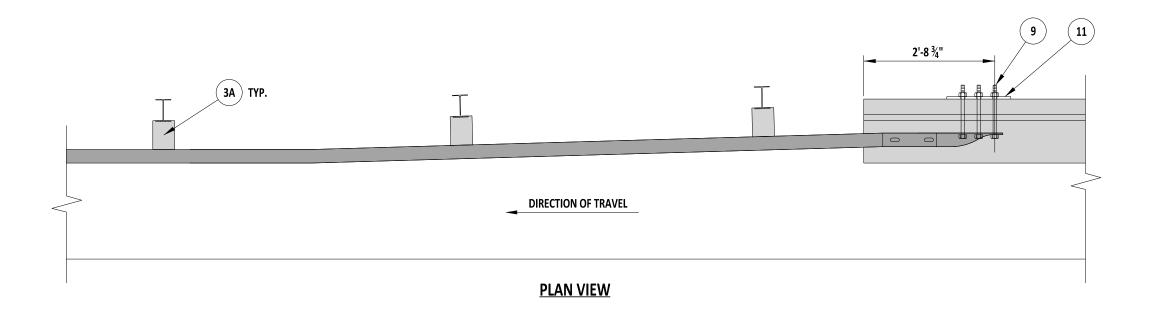

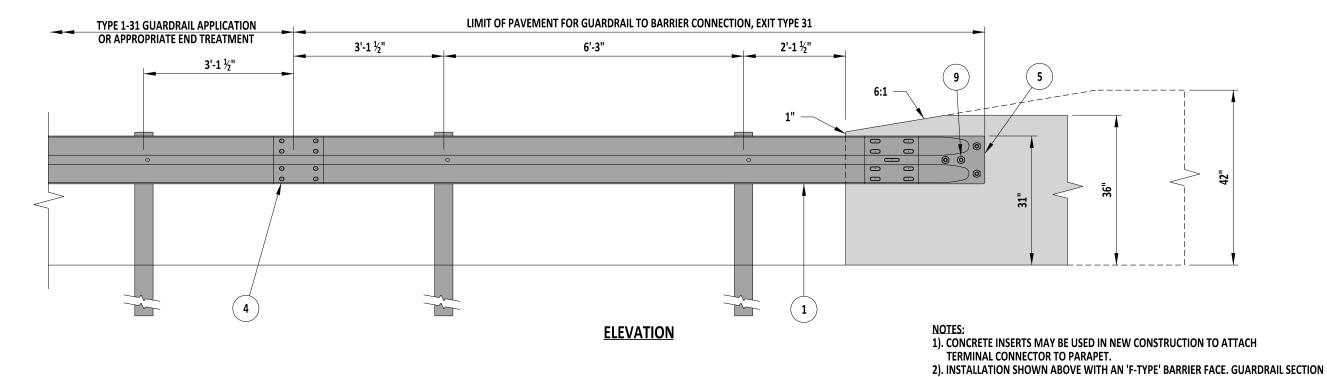

09/01/2020

GUARDRAIL TO BARRIER CONNECTION - EXIT TYPE 1-31

REVIEWED

09/01/2020

OF BARRIER CONNECTION SHALL BE ADJUSTED HORIZONTALLY IN ORDER TO MEET

3). IF CURB IS USED, IT SHALL BE A MAX 2" HEIGHT WITHIN THE LIMIT OF PAYMENT OF THE GUARDRAIL TO BARRIER CONNECTION - EXIT TYPE 31.

FLUSH AGAINST VARIOUS TYPES OF WALLS AND BARRIERS.

RECOMMENDED


STANDARD NO. B-8 (2020) SHT.


APPROVED


OF

SCALE: NTS

B-9 DETAIL RESERVED LEFT BLANK FOR FUTURE



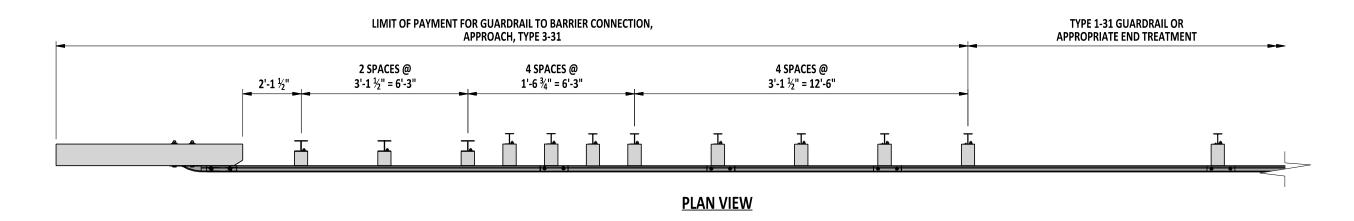

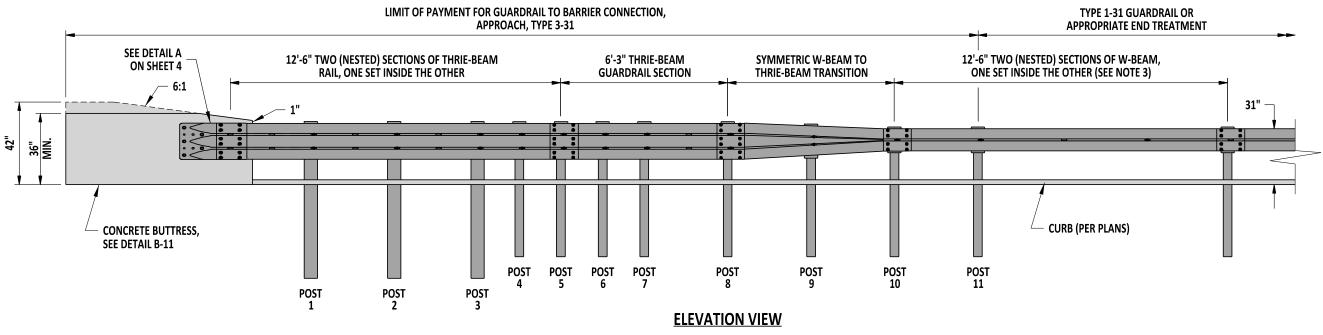

- 1). THIS GUARDRAIL-TO-BARRIER CONNECTION IS TO BE USED IN COMBINATION WITH DETAIL B-11, ON NEW CONSTRUCTION ONLY.
- 2). SEE SHEETS 2-4 FOR ADDITIONAL DETAILS.
- 3). WHEN CURB IS NOT USED, ONLY USE A SINGLE PIECE OF W-BEAM IN THIS SECTION, NESTED W-BEAM NOT REQUIRED IN THE ABSENCE OF CURB.
 4). MASH COMPLIANT SYSTEM DESIGN BASED ON MWRSF TEST
- REPORT TRP 03-367-19.



09/01/2020 **RECOMMENDED**

STANDARD NO.

GUARDRAIL TO BARRIER CONNECTION, APPROACH, TYPE 3-31

SHT.


B-10 (2020)


OF


REVIEWED


09/01/2020

APPROVED

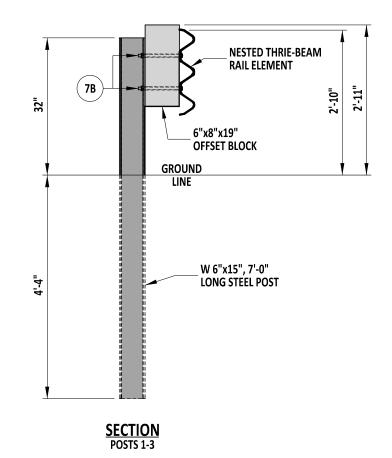

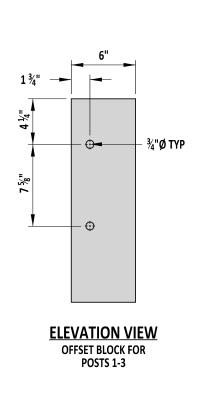

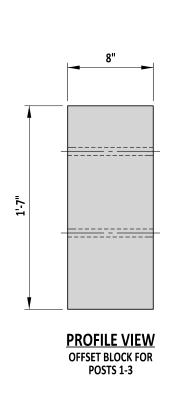

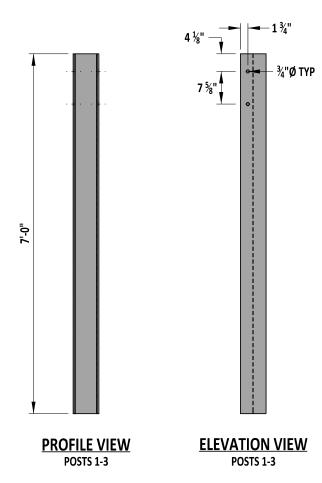


NOTE:
1). ALL OFFSET BLOCKS SHALL BE WOOD (SYP GRADE NO. 1 OR BETTER).

POST DETAILS

	Janul Son 09/01/2020	Gl	UARDRAIL TO BARRIEF	R CONNE	CTION, T	YPE 3-31		REVIEWED	DEPUTY DIRECTOR - DESIGN	09/01/2020 DATE
V DeIDOT <u></u>	RECOMMENDED	STANDARD NO.	B-10 (2020)	SHT.	2	OF	4	APPROVED	CHIEF ENGINEER	09/01/2020 DATE



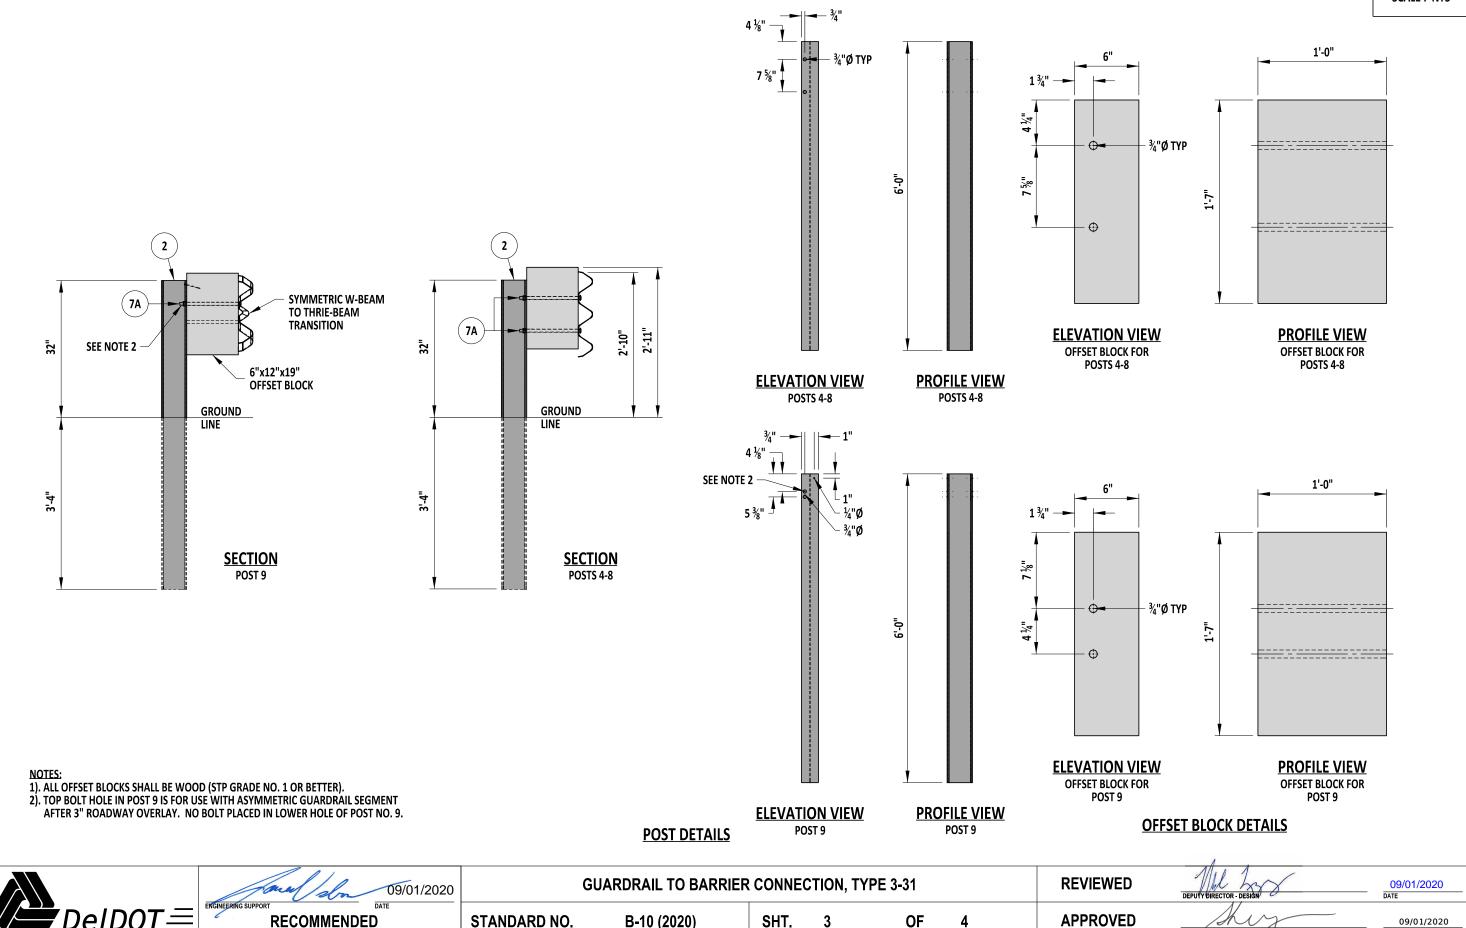


STANDARD NO.

B-10 (2020)


SHT. 3


OF

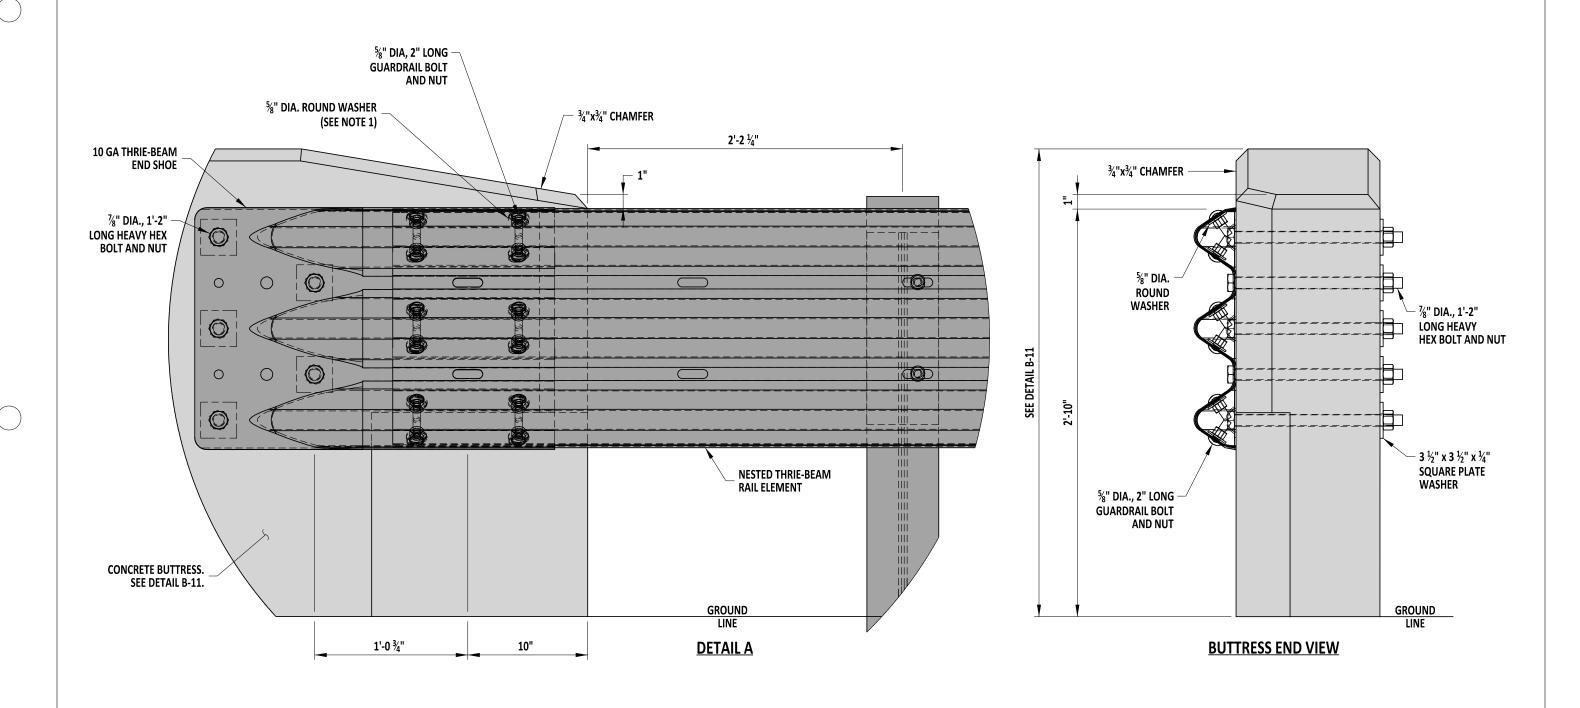


1). WASHERS PLACED BETWEEN NUTS AND THRIE BEAM END SHOE CONNECTOR.
2). ALL HARDWARE SHALL BE GALVANIZED.

TERMINAL END SHOE AND CONNECTION DETAIL





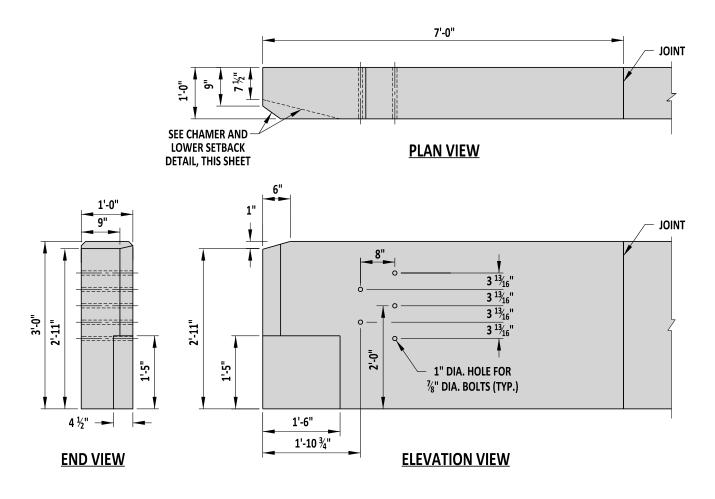

- 1). THRIE-BEAM GUARDRAIL NOT SHOWN. SEE STANDARD NO. B-10 FOR MORE INFORMATION ON THRIE-BEAM CONNCECTION.
 2). FOUNDATION NOT SHOWN. FOR ROADSIDE BARRIER APPLICATIONS BUTTRESS SHALL BE CONSTRUCTED ON A MINIMUM
- 2'-0" WIDE x 2'-0" DEEP FOOTING OVER 8" OF GABC.

 3). CHAMFER ALL EXPOSED EDGES ¾" x ¾", UNLESS NOTED OTHERWISE.
- 4). SEE SHEET 2 FOR BUTTRESS REINFORCEMENT.

DESIGNER NOTES:

1). FOR BUTTRESS APPLICATIONS AT BRIDGE APPROACHES, BRIDGE DESIGNER SHALL MATCH GEOMETRY SHOWN ON THIS DETAIL FOR THRIE-BEAM ATTACHMENT. LENGTH SHOWN HERE IS MINIMUM LENGTH FOR THRIE-BEAM ATTACHMENT. BRIDGE DESIGNER IS RESPONSIBLE FOR REINFORCEMENT DESIGN AND CONNECTION TO WINGWALL OR SLEEPER SLAB.

TL-3



09/01/2020 **RECOMMENDED**

THRIE-BEAM APPROACH GUARDRAIL TRANSITION (AGT) TO CONCRETE BUTTRESS

STANDARD NO.

B-11 (2020)


SHT. 1


OF 8 **REVIEWED**

APPROVED


09/01/2020



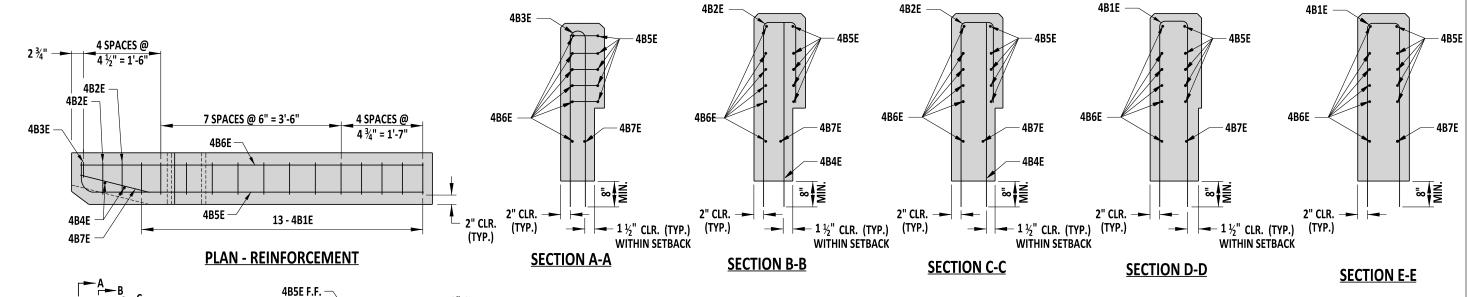

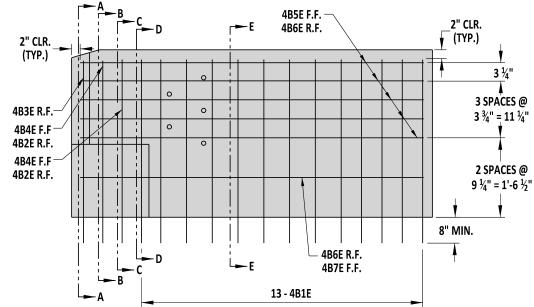

ELEVATION - REINFORCEMENT

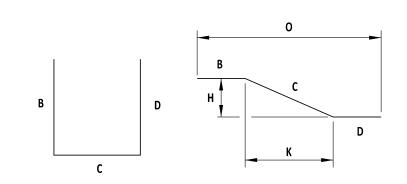

TYPE 17 BAR

TYPE 31 BAR

	BAR SCHEDULE									
MARK	SIZE	QTY.	LENGTH	TYPE	В	С	D	Н	К	0
4B1E	4	13	7'-8"	17	3'-6"	8"	3'-6"	•	-	-
4B2E	4	2	5'-5"	17	3'-6"	8"	1'-3"	•	-	-
4B3E	4	1	7'-4 ³ "	17	3'-6"	4 3/4"	3'-6"	•	-	-
4B4E	4	2	3'-6"	STR	3'-6"	-	-	-	-	-
4B5E	4	5	7'-3 ½"	17	7 ½"	6'-8"	-	•	-	-
4B6E	4	6	6'-8"	STR	-	-	-	-	-	-
4B7E	4	1	6'-8 ½"	31	-	1'-2 ³ / ₄ "	5'-5 ³ / ₄ "	3 ½"	1'-2 ½"	6'-8"

1). CONCRETE CLEAR COVER FOR REINFORCEMENT BARS SHALL BE 2" MINIMUM, UNLESS NOTED OTHERWISE.

2). F.F. = FRONT FACE

R.F. = REAR FACE

DelDOT=

09/01/2020 **RECOMMENDED**

THRIE-BEAM APPROACH GUARDRAIL TRANSITION (AGT) TO CONCRETE BUTTRESS						ESS
0T4ND4DD N0	D 44 (0000)	0.17	•	-	•	

REVIEWED

09/01/2020

STANDARD NO.


B-11 (2020)

SHT. 2


OF 8 **APPROVED**


09/01/2020 DATE

TL-3



CHAMFER AND LOWER SETBACK DETAIL

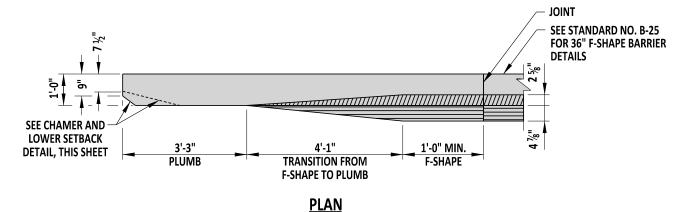

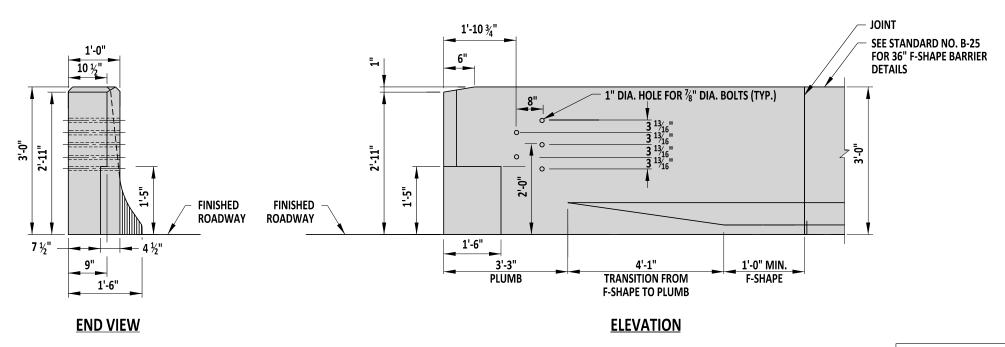

- 1). THRIE-BEAM GUARDRAIL NOT SHOWN. SEE STANDARD NO. B-10 FOR MORE INFORMATION ON THRIE-BEAM CONNECTION.
 2). FOUNDATION NOT SHOWN. BUTTRESS SHALL BE CONSTRUCTED ON A FOOTING THAT MATCHES THE ADJACENT CONCRETE BARRIER FOOTING.
- 3). CHAMFER ALL EXPOSED EDGES $\frac{3}{4}$ " x $\frac{3}{4}$ ", UNLESS NOTED OTHERWISE.
- 4). SEE SHEET 4 FOR BUTTRESS REINFORCEMENT DETAILS.

DESIGNER NOTES:

1). FOR BUTTRESS APPLICATIONS AT BRIDGE APPROACHES, BRIDGE DESIGNER SHALL MATCH GEOMETRY SHOWN ON THIS DETAIL FOR THRIE-BEAM ATTACHMENT. LENGTH SHOWN HERE IS MINIMUM LENGTH FOR THRIE-BEAM ATTACHMENT. BRIDGE DESIGNER IS RESPONSIBLE FOR REINFORCEMENT DESIGN AND CONNECTION TO WINGWALL OR SLEEPER SLAB.

TL-4



09/01/2020 **RECOMMENDED**

THRIE-BEAM AGT TO CONCRETE BUTTRESS - 36" F-SHAPE TRANSITION

STANDARD NO.

B-11 (2020)

SHT.

OF

8

REVIEWED

APPROVED

09/01/2020



5B13E F.F.

5B11E R.F.

0

10 ¾"

 $10\frac{1}{4}$ "

9 3"

9 ½"

8 ³"

8 ½"

8'-0"

8'-0"

8'-0"

8'-0"

TL-4

4 1/4"

3 ½"

 $2\frac{3}{4}$ "

2"

1 1/4"


<u>1</u>"

 $1\frac{1}{2}$ "

8"

1'-4"

1'-4"

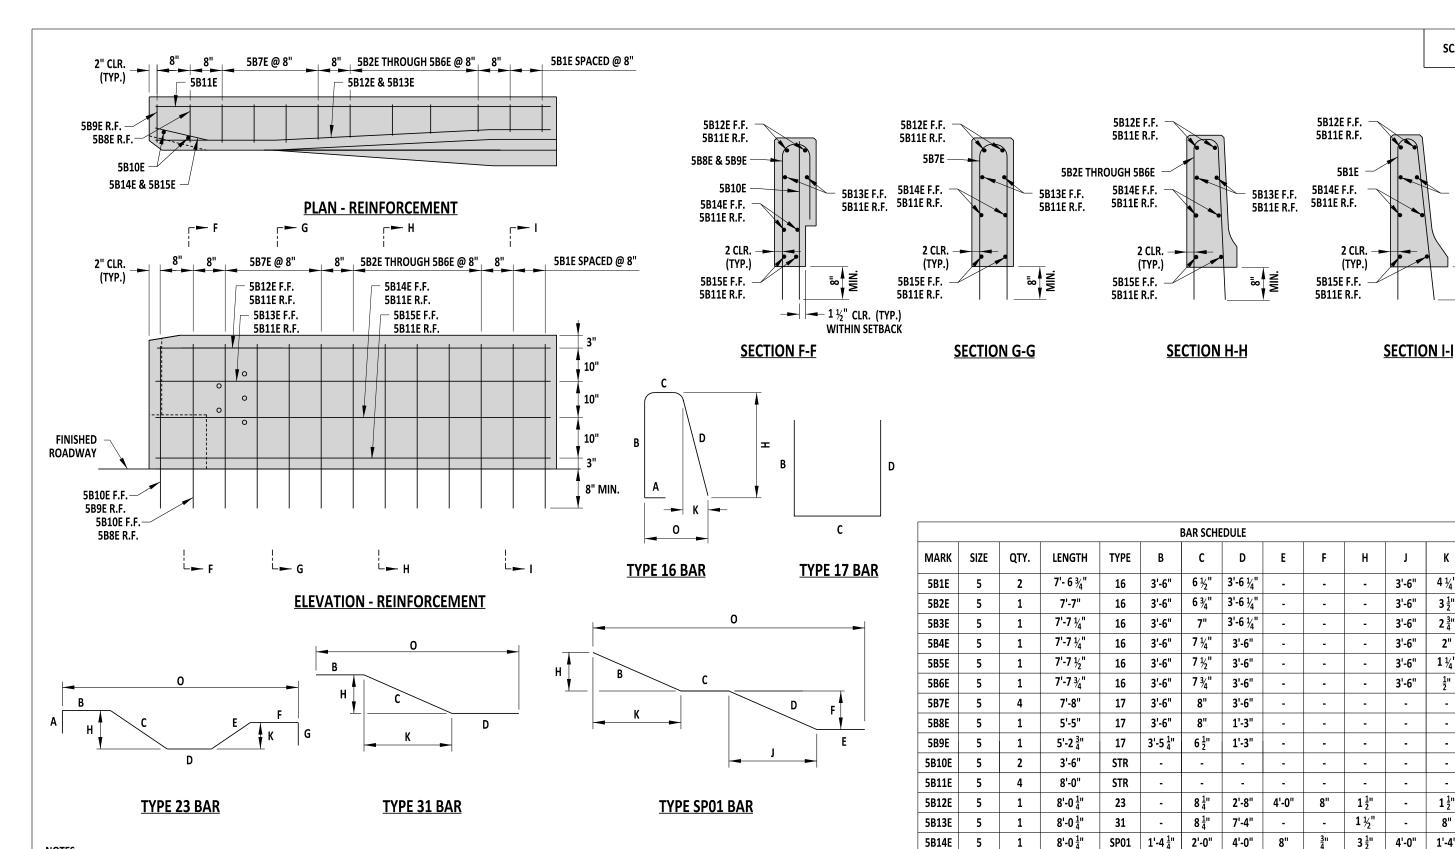

1). CONCRETE CLEAR COVER FOR REINFORCEMENT BARS SHALL BE 2" MINIMUM, UNLESS NOTED OTHERWISE.

2). F.F. = FRONT FACE

R.F. = REAR FACE

	Jacob Son 09/01/2020
	ENGINEERING SUPPORT DATE
V DeIDOT <u></u>	RECOMMENDED

THRIE-BEAM AGT TO CONCRETE B	UTTRESS - 36" F-SHAPE TRANSITION

B-11 (2020)

STANDARD NO.

SHT. OF **APPROVED** 8 4

1

5B15E

5

8'-0 ½"

SP01

1'-4 ½"

REVIEWED

2'-0"

4'-0"

CHIEF ENGINEER


2"

3 ½"


4'-0"

8"


09/01/2020



CHAMFER AND LOWER SETBACK DETAIL

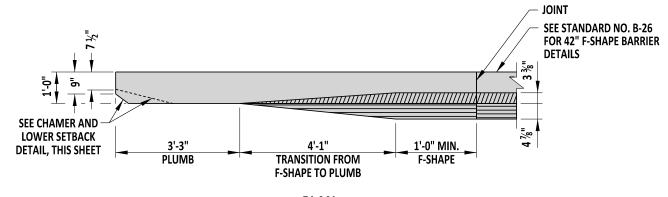

<u>PLAN</u>

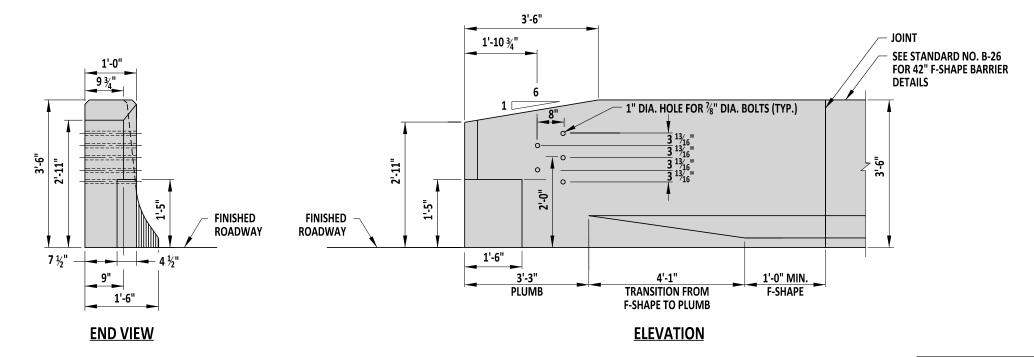

- 1). THRIE-BEAM GUARDRAIL NOT SHOWN. SEE STANDARD NO. B-10 FOR MORE INFORMATION ON THRIE-BEAM CONNECTION.
 2). FOUNDATION NOT SHOWN. BUTTRESS SHALL BE CONSTRUCTED ON A FOOTING THAT MATCHES THE ADJACENT CONCRETE BARRIER FOOTING.
- 3). CHAMFER ALL EXPOSED EDGES $\frac{3}{4}$ " x $\frac{3}{4}$ ", UNLESS NOTED OTHERWISE.
- 4). SEE SHEET 6 FOR BUTTRESS REINFORCEMENT DETAILS.

DESIGNER NOTES:

1). FOR BUTTRESS APPLICATIONS AT BRIDGE APPROACHES, BRIDGE DESIGNER SHALL MATCH GEOMETRY SHOWN ON THIS DETAIL FOR THRIE-BEAM ATTACHMENT. LENGTH SHOWN HERE IS MINIMUM LENGTH FOR THRIE-BEAM ATTACHMENT. BRIDGE DESIGNER IS RESPONSIBLE FOR REINFORCEMENT DESIGN AND CONNECTION TO WINGWALL OR SLEEPER SLAB.

TL-4



09/01/2020 **RECOMMENDED**


THRIE-BEAM AGT TO CONCRETE BUTTRESS - 42" F-SHAPE TRANSITION


REVIEWED

09/01/2020

09/01/2020 DATE

APPROVED STANDARD NO. B-11 (2020) SHT. OF 8

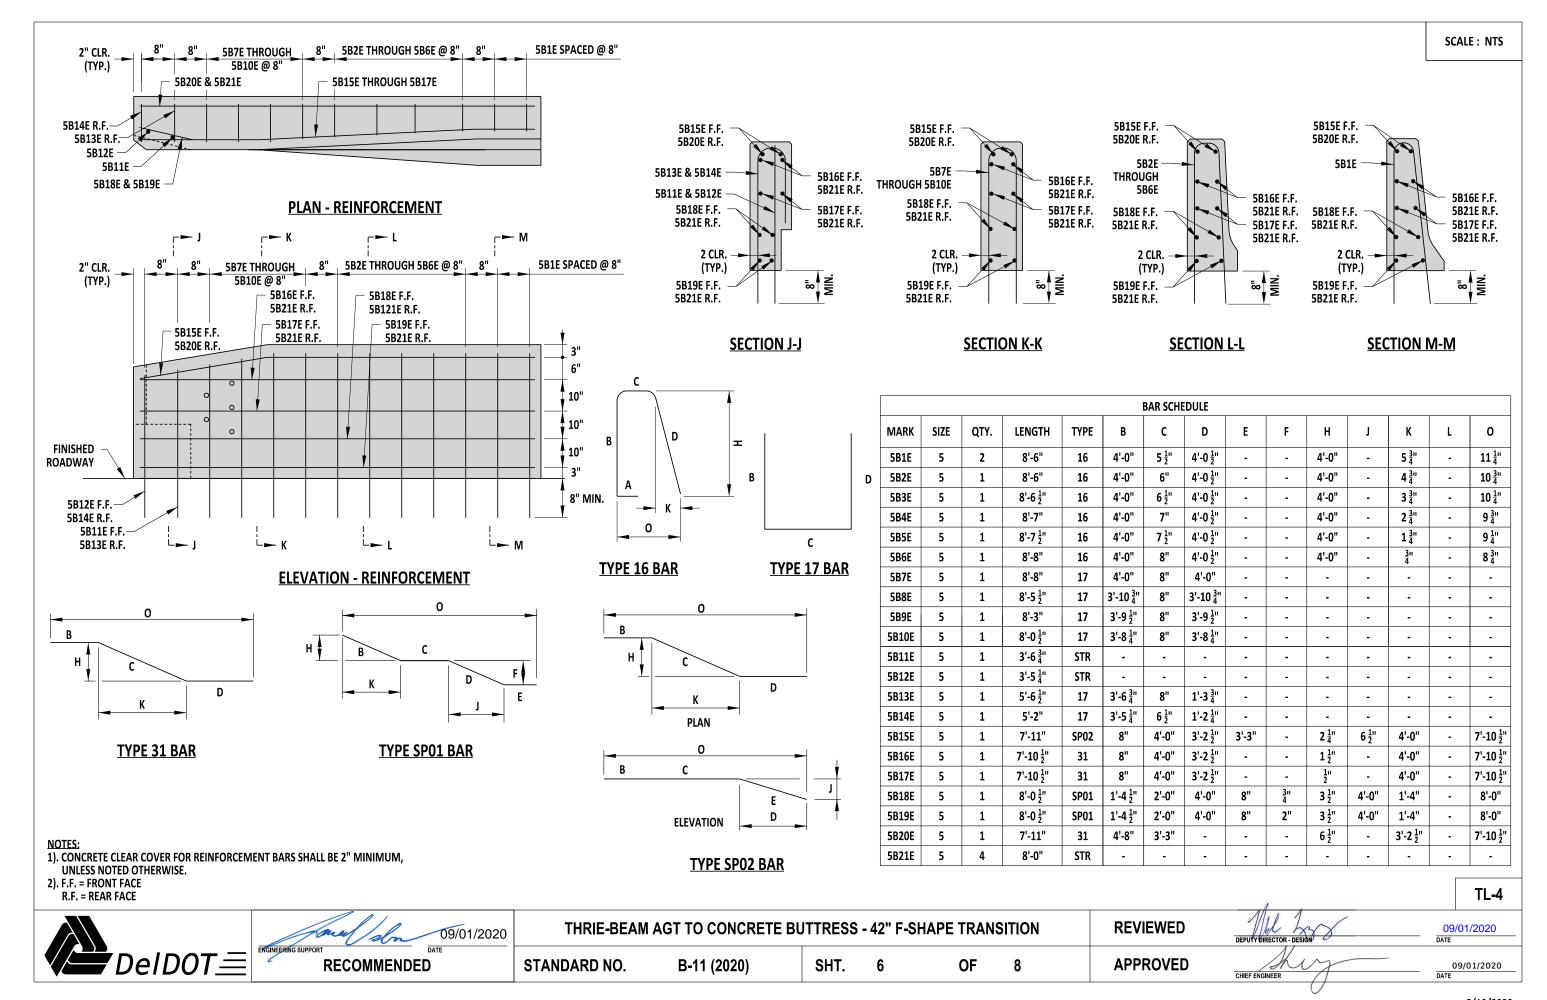

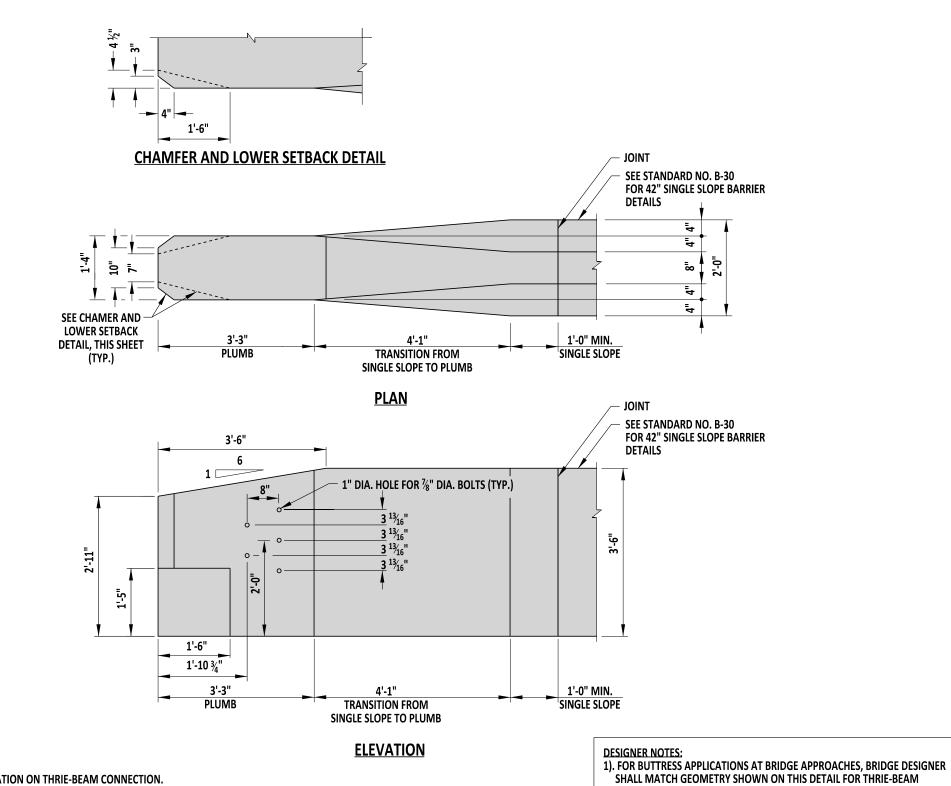

4 ½" —

2'-0"

(TYP.)

1'-4"

(TYP.)

1). THRIE-BEAM GUARDRAIL NOT SHOWN. SEE STANDARD NO. B-10 FOR MORE INFORMATION ON THRIE-BEAM CONNECTION.
2). FOUNDATION NOT SHOWN. BUTTRESS SHALL BE CONSTRUCTED ON A FOOTING THAT MATCHES THE ADJACENT CONCRETE BARRIER FOOTING.

END VIEW

- 3). CHAMFER ALL EXPOSED EDGES $\frac{3}{4}$ " x $\frac{3}{4}$ ", UNLESS NOTED OTHERWISE.
- 4). SEE SHEET 8 FOR BUTTRESS REINFORCEMENT DETAILS.

09/01/2020 'DeIDOT<u>≡</u> **RECOMMENDED**

THRIE-BEAM AGT TO CONCRETE BUTTRESS - 42" SINGLE SLOPE TRANSITION

REVIEWED

OF

8

09/01/2020

09/01/2020 DATE

STANDARD NO. B-11 (2020) SHT. 7

APPROVED


ATTACHMENT. LENGTH SHOWN HERE IS MINIMUM LENGTH FOR THRIE-BEAM

ATTACHMENT. BRIDGE DESIGNER IS RESPONSIBLE FOR REINFORCEMENT


DESIGN AND CONNECTION TO WINGWALL OR SLEEPER SLAB.

TL-5


8/19/2020

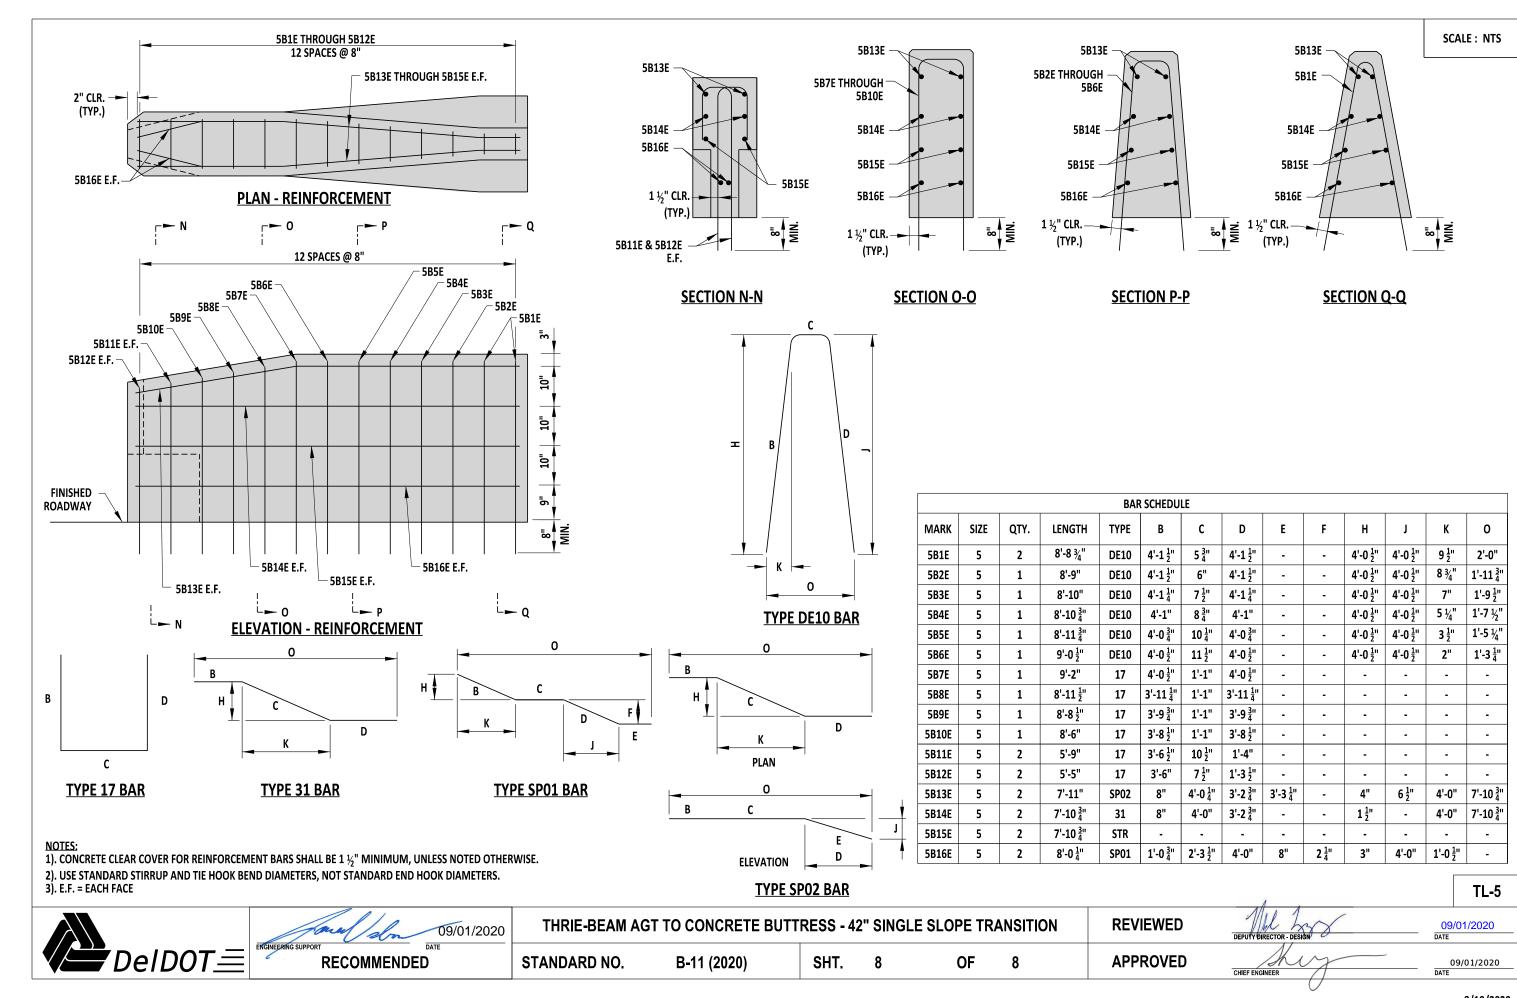


B-12 DETAIL RESERVED LEFT BLANK FOR FUTURE





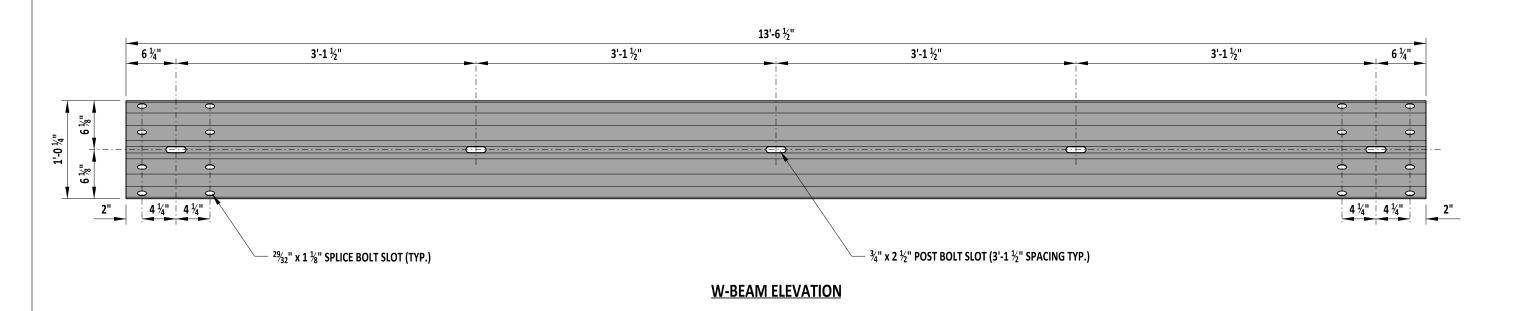

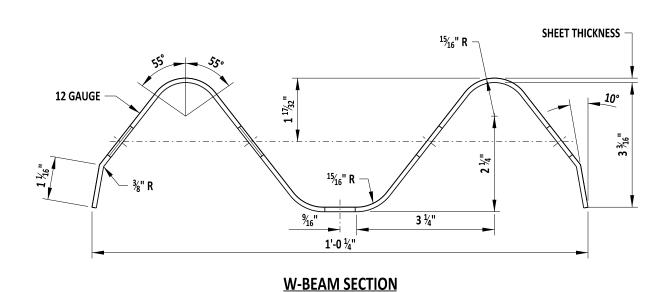

NOTE: 1). FOUR ADDITIONAL ¾" x 2 ½" SLOTS SHALL BE PROVIDED AT 3'-1 ½" SPACING FOR A 26'-0 ½" BEAM LENGTH.

DelDOT<u></u>

■ The location of t


W-BEAM SECTION AND ELEVATION REVIEWED

RECOMMENDED STANDARD NO. B-13 (2020) SHT. 1 OF 12 APPROVED

DIRECTOR - DESIGN

09/01/2020 DATE

8/19/2020

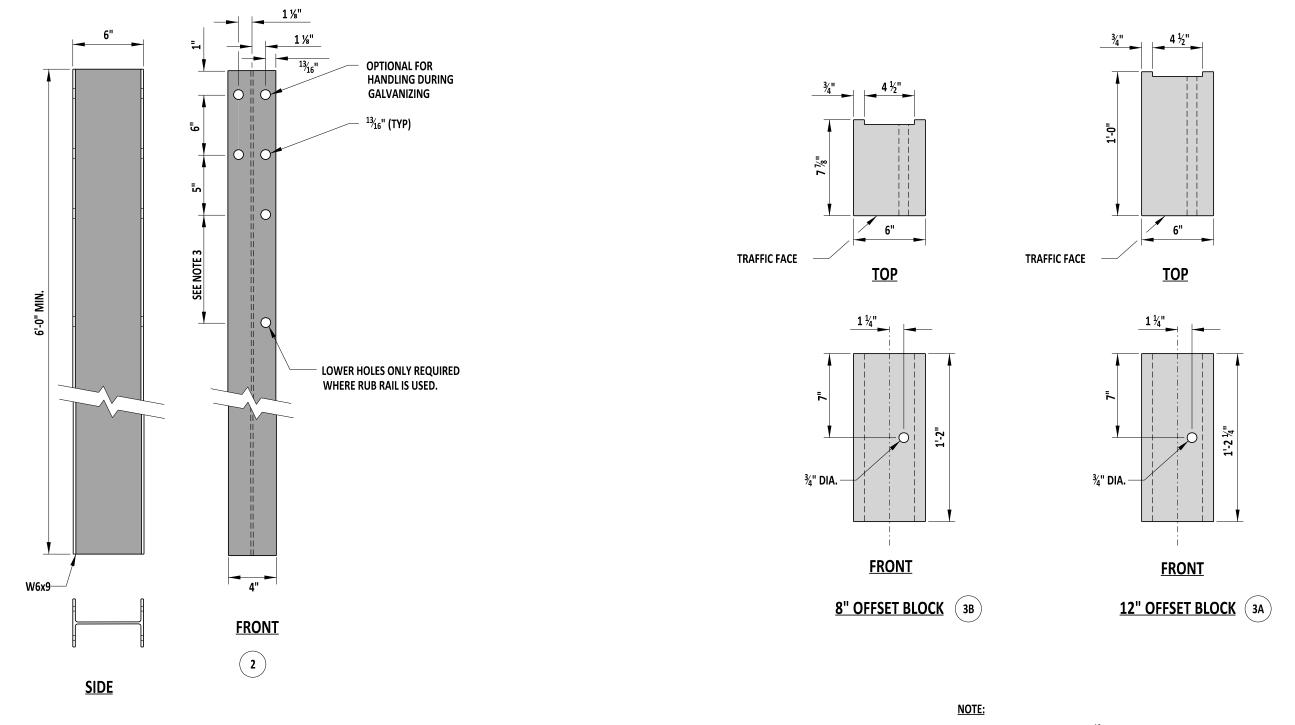

- 1). ALL HOLES SHALL BE ¹³/₁₆" DIA. BOLT HOLE PATTERN IS SYMMETRICAL WITH
- RESPECT TO THE VERTICAL AXIS OF THE POST.
 WHERE CONDITIONS REQUIRE, ALTERNATE POST LENGTHS IN INCREMENTS OF 6" MAY BE USED.
- THE RUB RAIL HOLE OFFSET DISTANCE IS 10%" FOR GUARDRAIL TO BARRIER CONNECTION, TYPE 1-27 AND 1-31, 1'-2" FOR GUARDRAIL TO BARRIER CONNECTION, TYPE 2-27, AND 7 %" FOR GUARDRAIL TO BARRIER CONNECTION, TYPE 2-31.



POST

09/01/2020 RECOMMENDED

STANDARD NO.

W-BEAM STEEL POST AND OFFSET BLOCK B-13 (2020)

W-BEAM STEEL POST AND OFFSET BLOCK

SHT. 2


OF


12


REVIEWED


APPROVED

09/01/2020 DATE

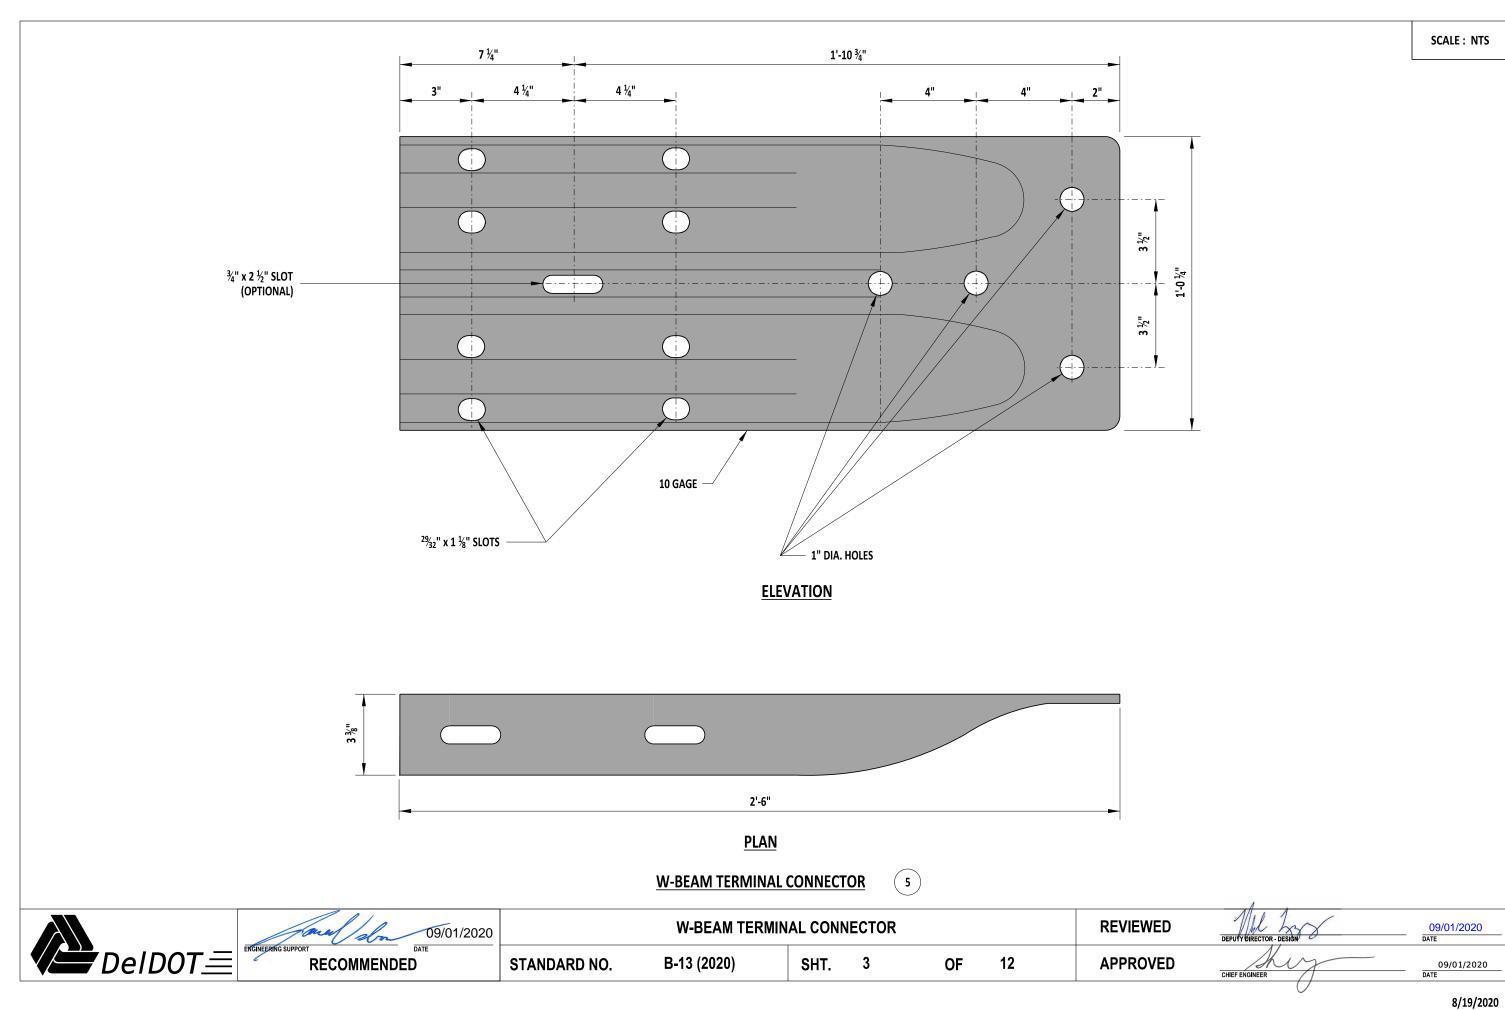




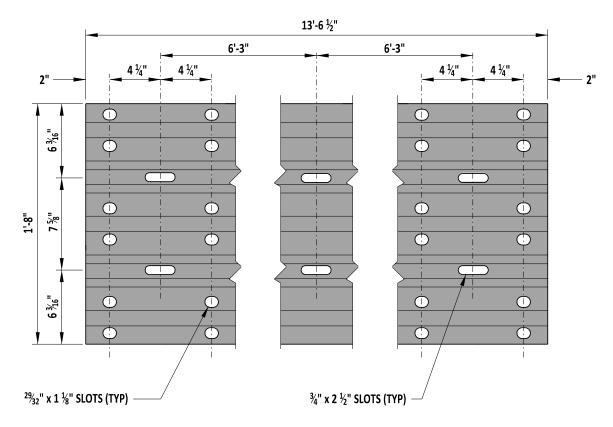

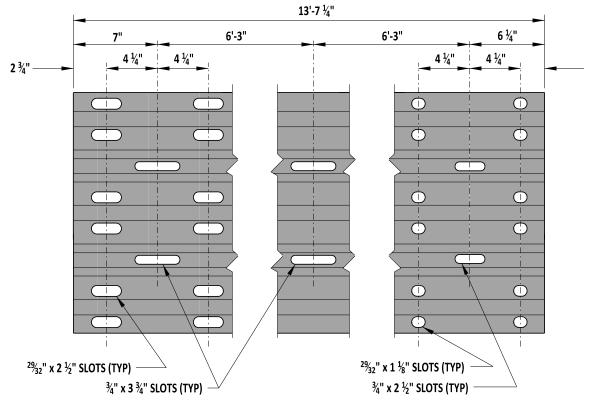



THRIE BEAM ELEVATION


THRIE BEAM EXPANSION ELEMENT

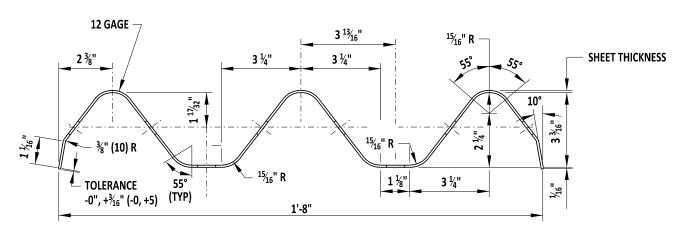


THRIE BEAM SECTION



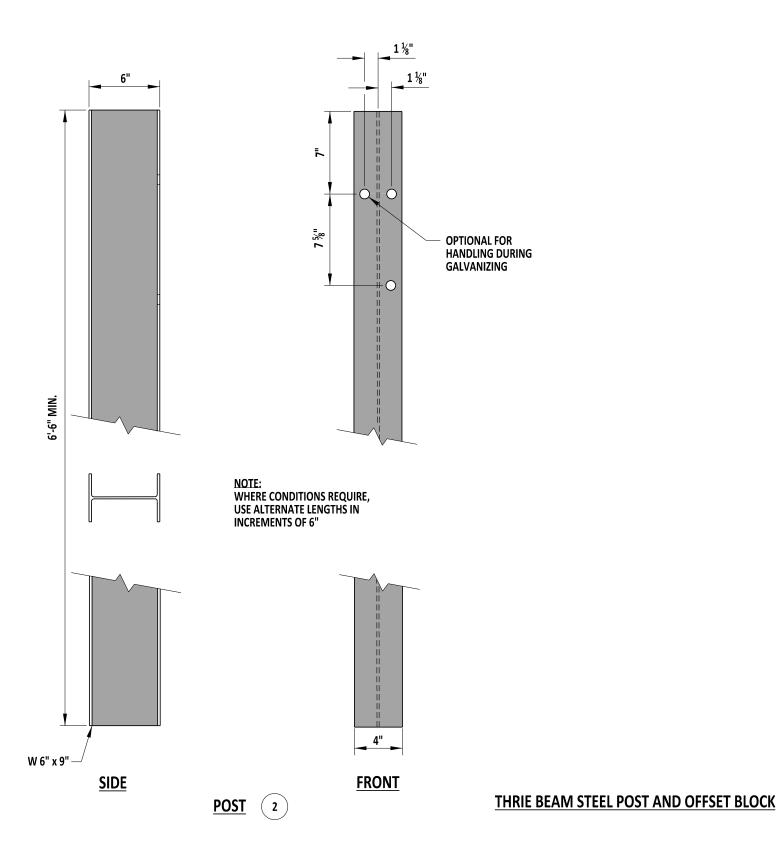



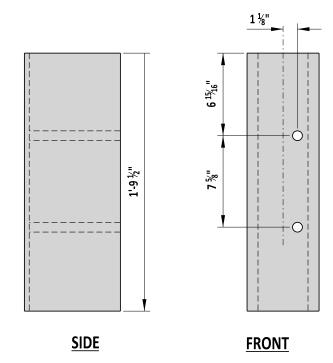

OFFSET BLOCK

- 1). ALL HOLES SHALL BE $^{13}\!\!_{16}$ " DIA. BOLT HOLE PATTERN IS SYMMETRICAL WITH
- RESPECT TO THE VERTICAL AXIS OF THE POST.

 2). STEEL POST AND OFFSET BLOCK DETAILS ARE BASED ON NCHRP 350 CRASH TESTING MASH COMPLIANT DETAILS ARE NOT YET AVAILABLE



09/01/2020 RECOMMENDED

STANDARD NO. B-13 (2020)

THRIE BEAM STEEL POST AND OFFSET BLOCK

SHT. 5


OF


12


REVIEWED


APPROVED

09/01/2020 DATE

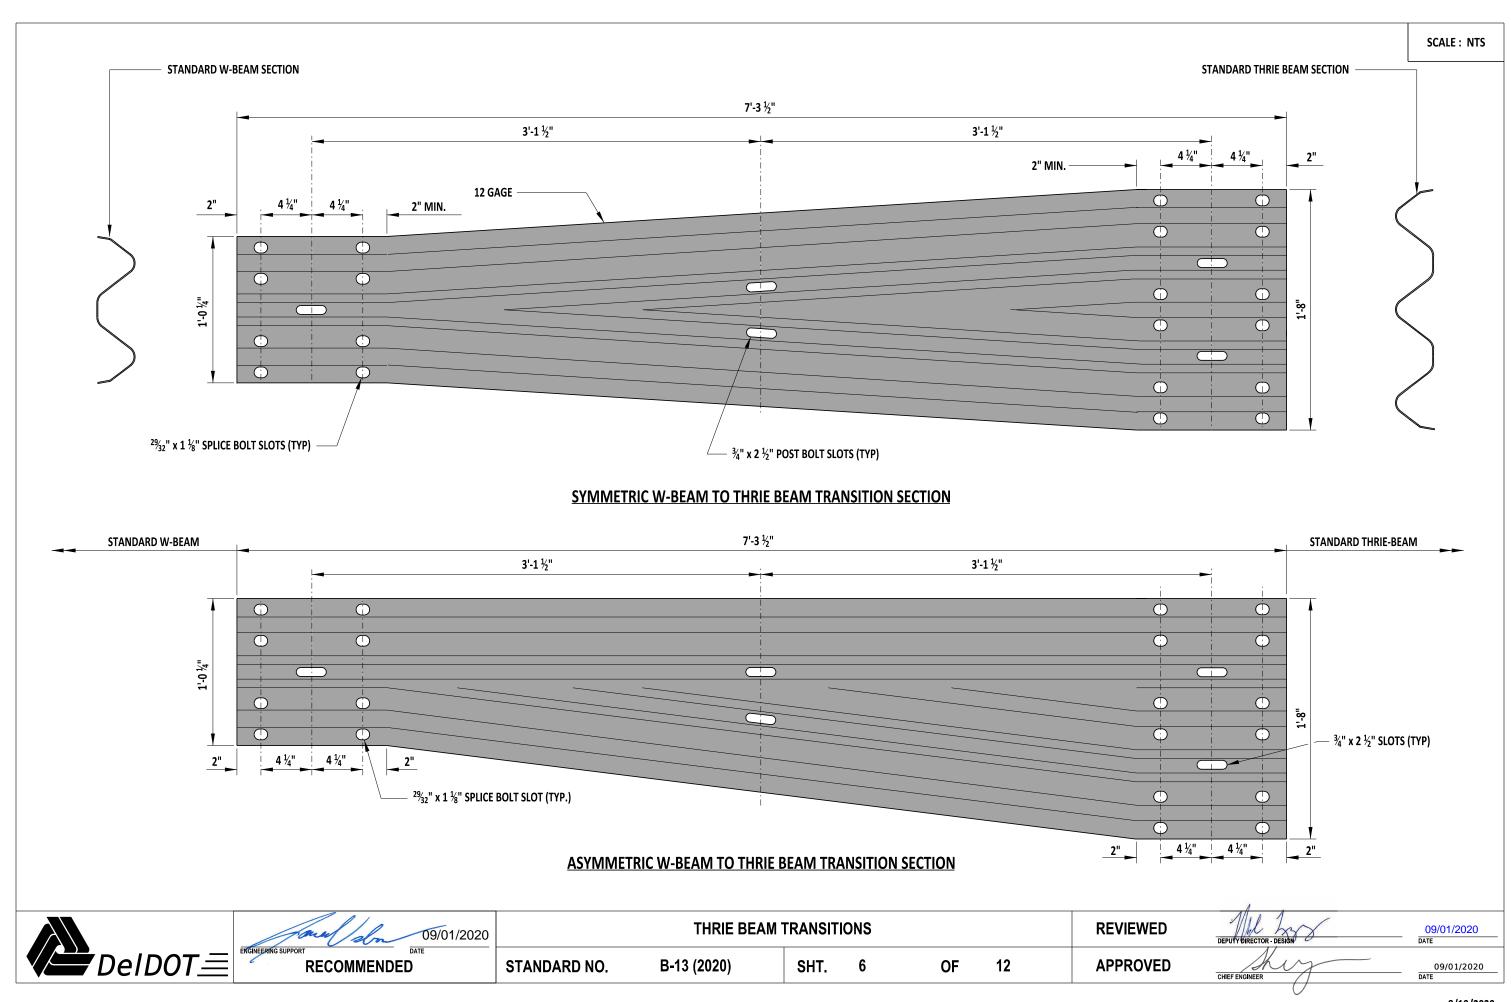

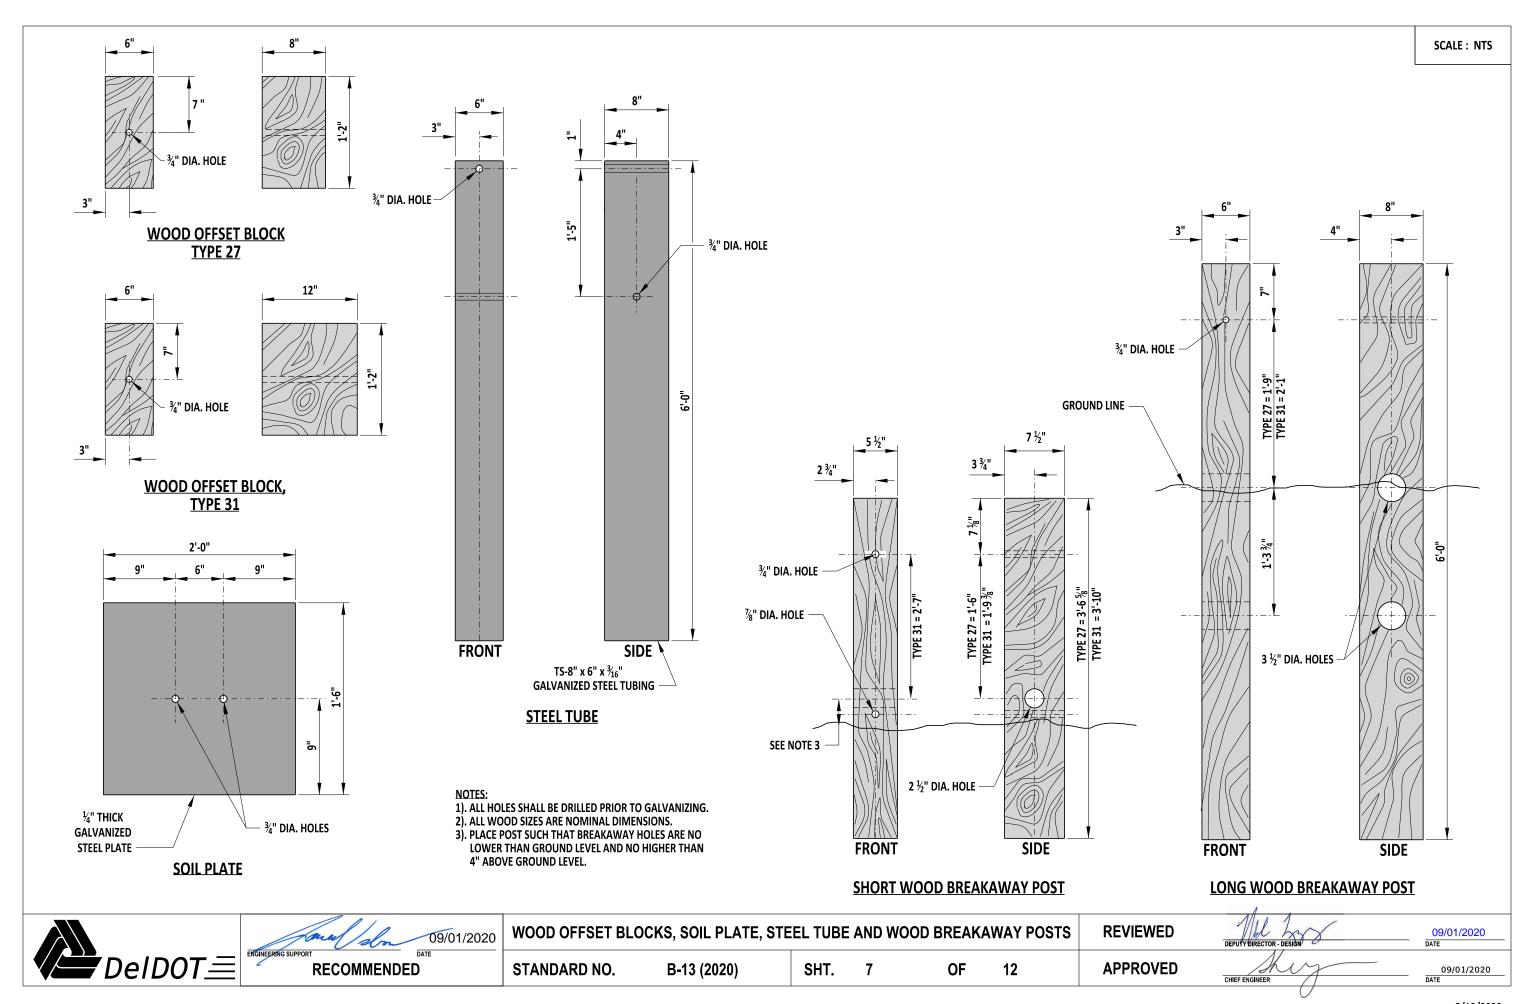

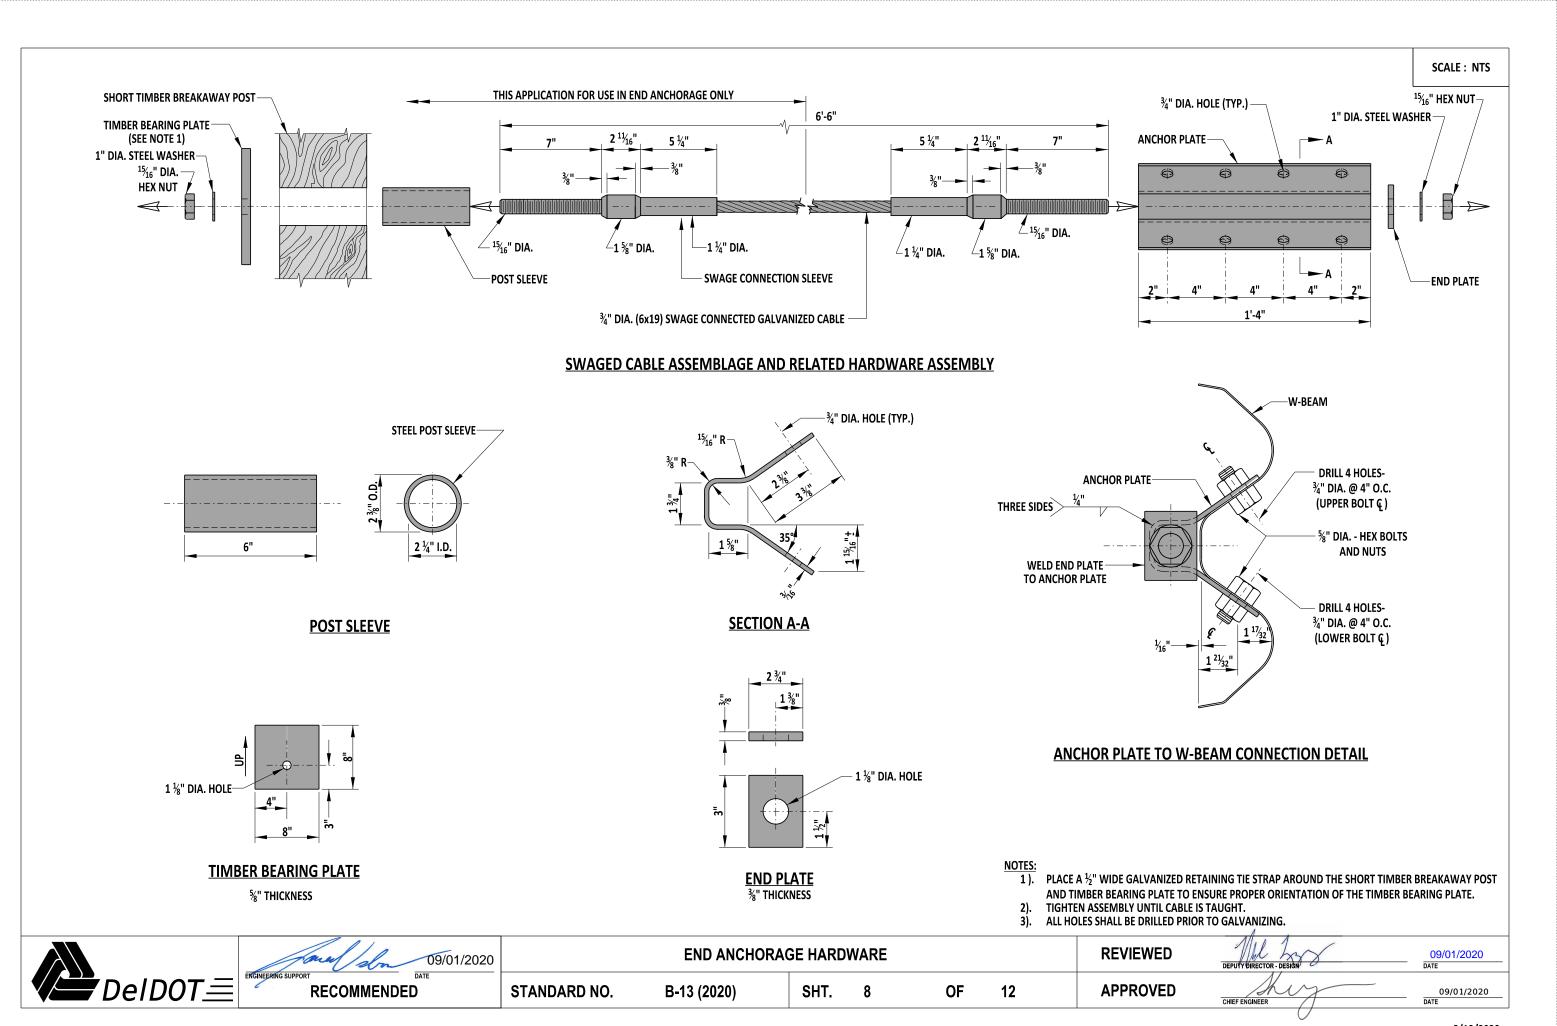


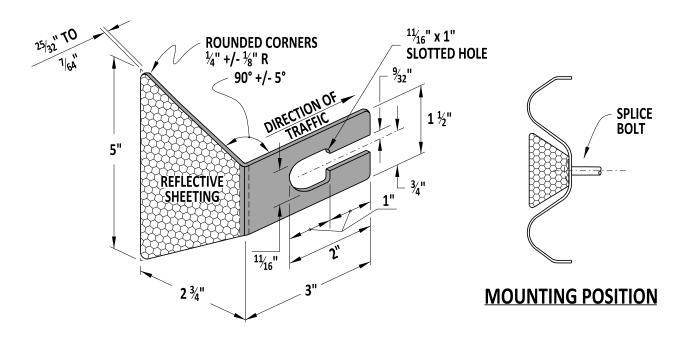

GUARDRAIL REFLECTOR

NOTES

- 1). GUARDRAIL REFLECTORS ON TYPE 1 AND 3 GUARDRAIL SHALL BE INSTALLED IN THE CENTER SLOT HOLES WHERE POSTS ARE NOT LOCATED. GUARDRAIL REFLECTORS ON TYPE 2 GUARDRAIL ARE TO BE INSTALLED IN THE CENTER SLOT HOLES LOCATED ON THE SPLICE ONLY. GUARDRAIL REFLECTORS ON THRIE BEAM GUARDRAIL ARE TO BE LOCATED ON THE UPPER MOST CENTER SLOT HOLE LOCATED ON THE SPLICE ONLY.
- 2). GUARDRAIL REFLECTORS SHALL NOT BE INSTALLED WITHIN THE LIMITS OF GUARDRAIL END TERMINALS.
- 3). GUARDRAIL REFLECTOR SPACING SHALL BE NO LESS THAN 50 FEET.
- 4). GUARDRAIL REFLECTORS PLACED ON THE RIGHT SIDE OF A TWO-WAY TWO-LANE ROADWAY SHALL DISPLAY WHITE RETROREFLECTIVE SHEETING TO BOTH DIRECTIONS OF TRAVEL.
- 5). GUARDRAIL REFLECTORS PLACED ON THE LEFT SIDE OF A DIVIDED HIGHWAY OR RAMP SHALL DISPLAY YELLOW RETROREFLECTIVE SHEETING TO THE APPROACHING DIRECTION OF TRAVEL AND RED RETROREFLECTIVE SHEETING TO THE WRONG DIRECTION OF TRAVEL.
- 6). GUARDRAIL REFLECTORS PLACED ON THE RIGHT SIDE OF A DIVIDED HIGHWAY OR RAMP SHALL DISPLAY WHITE RETROREFLECTIVE SHEETING TO THE APPROACHING DIRECTION OF TRAVEL AND RED RETROREFLECTIVE SHEETING TO THE WRONG DIRECTION OF TRAVEL.

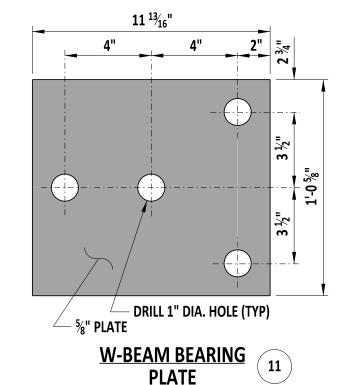



NEERING SUPPORT DATE

RECOMMENDED

REFLECTOR AND W-BEAM BEARING PLATE

SHT.

REVIEWED

09/01/2020 DATE

STANDARD NO.

B-13 (2020)


9

OF 12


APPROVED

0/40/202



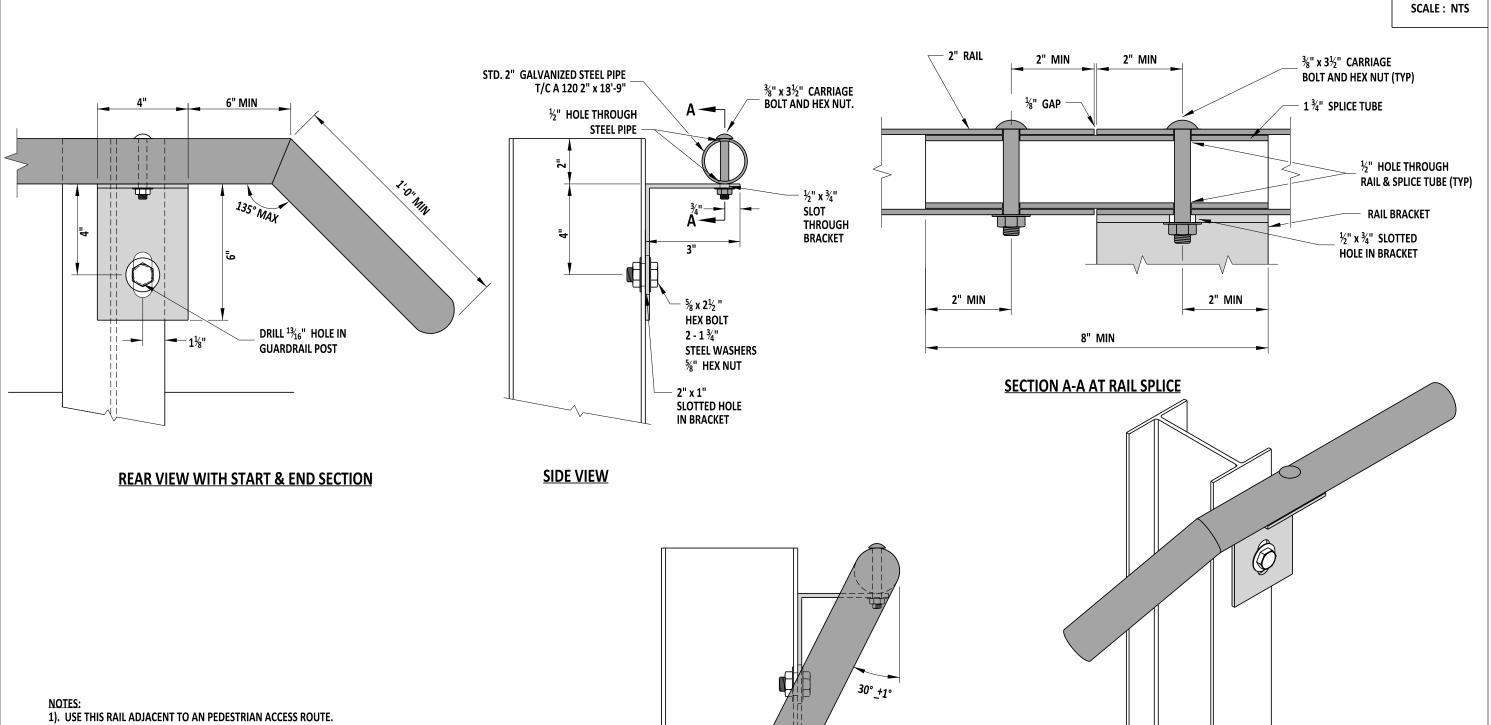

- 2). SHOP FABRICATE ALL COMPONENTS OF THE RAIL INCLUDING CUTTING AND DRILLING.
- 3). BUR ALL EXPOSED THREADED HARDWARE TO ENSURE NUTS CAN NOT BE REMOVED.
- 4). PRIOR TO GALVANIZING, SHOP DRILL GUARDRAIL POSTS THAT RAIL BRACKETS WILL BE ATTACHED TO.
- 5). PLACE RAIL SPLICES AT RAIL SUPPORT BRACKETS, USING THE SAME BOLT TO ATTACH THE RAIL TO THE BRACKET, TO SECURE THE SPLICE TUBE.
- 6). ONLY INSTALL RAILS TO STANDARD W-BEAM SECTIONS AND AT LEAST ONE POST AWAY FROM THE PAYMENT LIMITS OF THE END TREATMENT.
- 7). FOR TYPE 2-31 GUARDRAIL, BOLT RAILING TO EVERY OTHER POST OR AT A SPACING OF 6'-3".



SIDE VIEW WITH START & END SECTION

ISOMETRIC VIEW WITH START & END SECTION



09/01/2020 **RECOMMENDED**

GUARDRAIL MOUNTED RAIL STANDARD NO.

B-13 (2020)


SHT.


10

OF 12 **REVIEWED**

APPROVED

09/01/2020

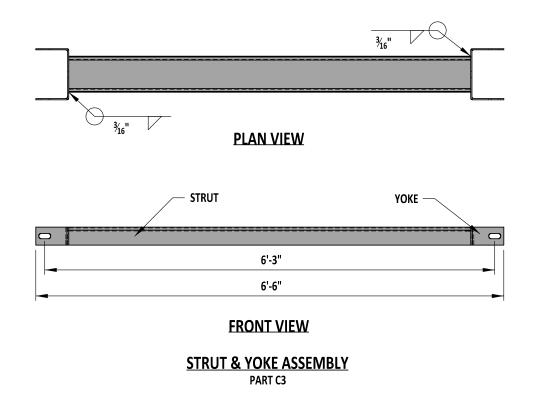

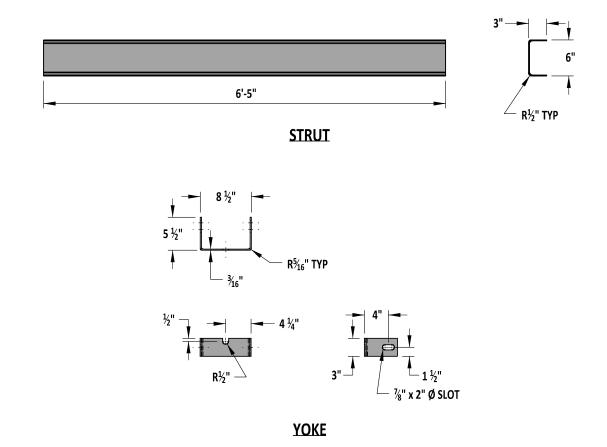





09/01/2020 RECOMMENDED

DOWNSTREAM ANCHORAGE SYSTEM - GROUND STRUT & ANCHOR BRACKET STANDARD NO. B-13 (2020)

SHT. 11 OF 12 **REVIEWED APPROVED** 09/01/2020 Date

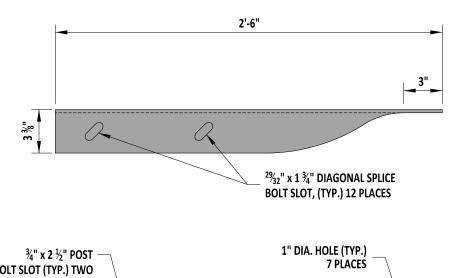

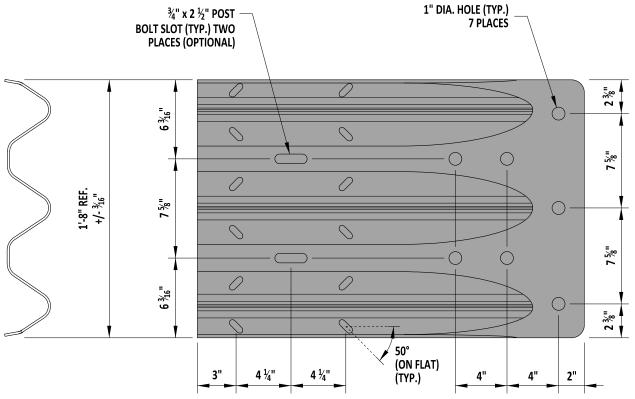




faul st	09/01/2020					
ENGINEERING SUPPORT	DATE					
RECOMMENDED						


GUARDRAIL TO BARRIER CONNECTION - THRIE-BEAM TERMINAL CONNECTOR							
STANDARD NO.	B-13 (2020)	SHT.	12	OF	12		


REVIEWED APPROVED


09/01/2020 Date

B-14 DETAIL RESERVED LEFT BLANK FOR FUTURE




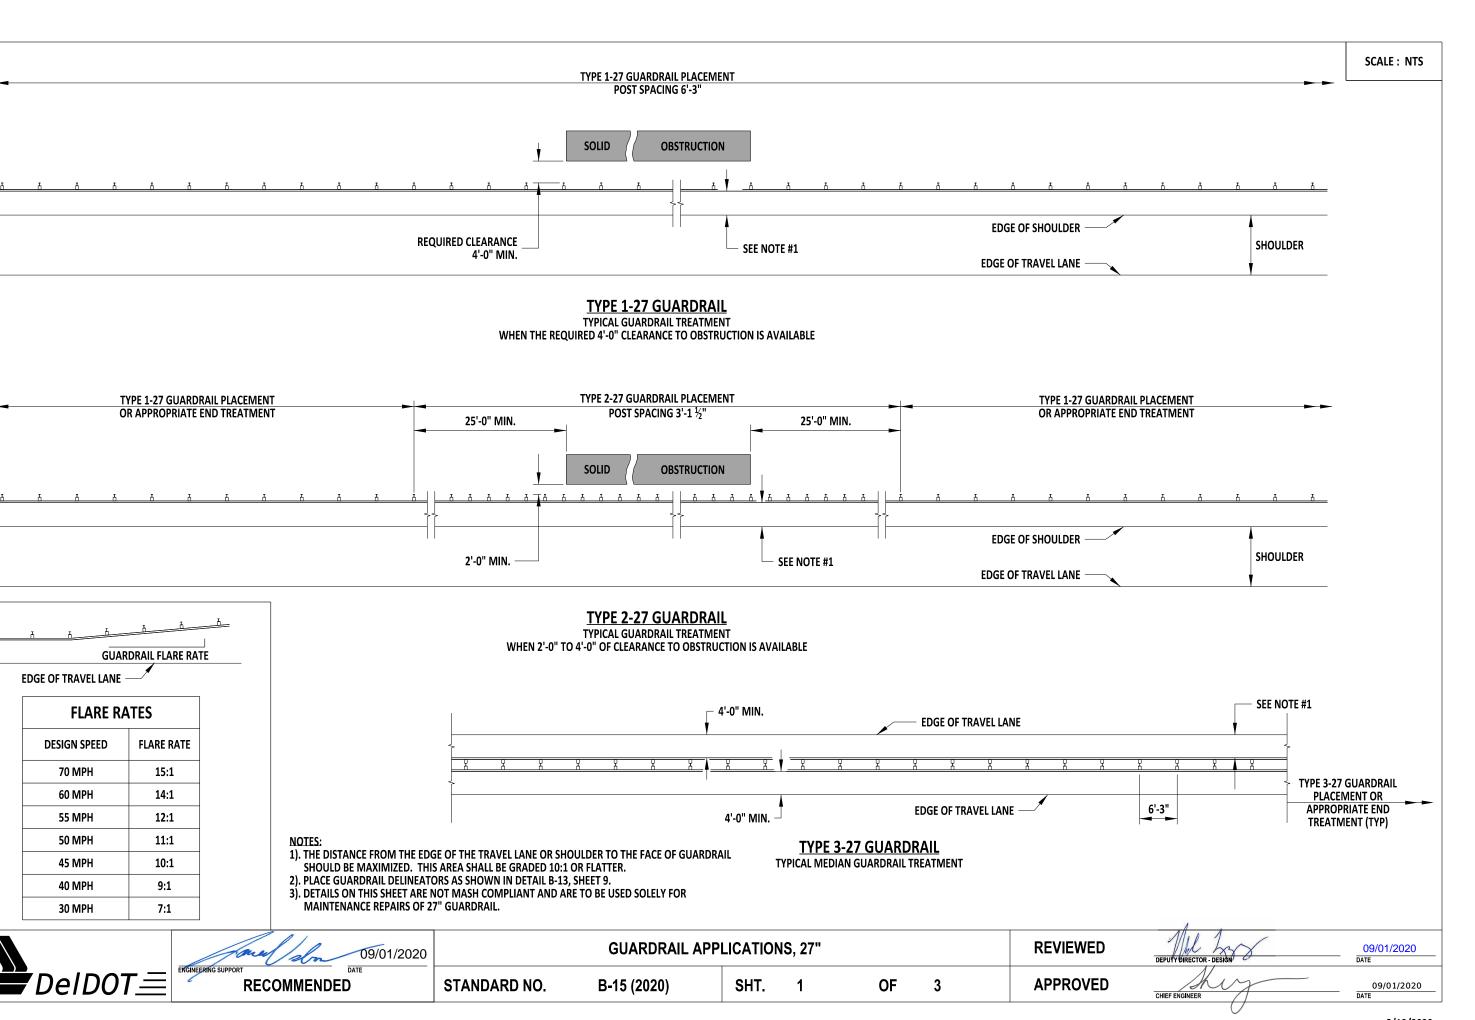


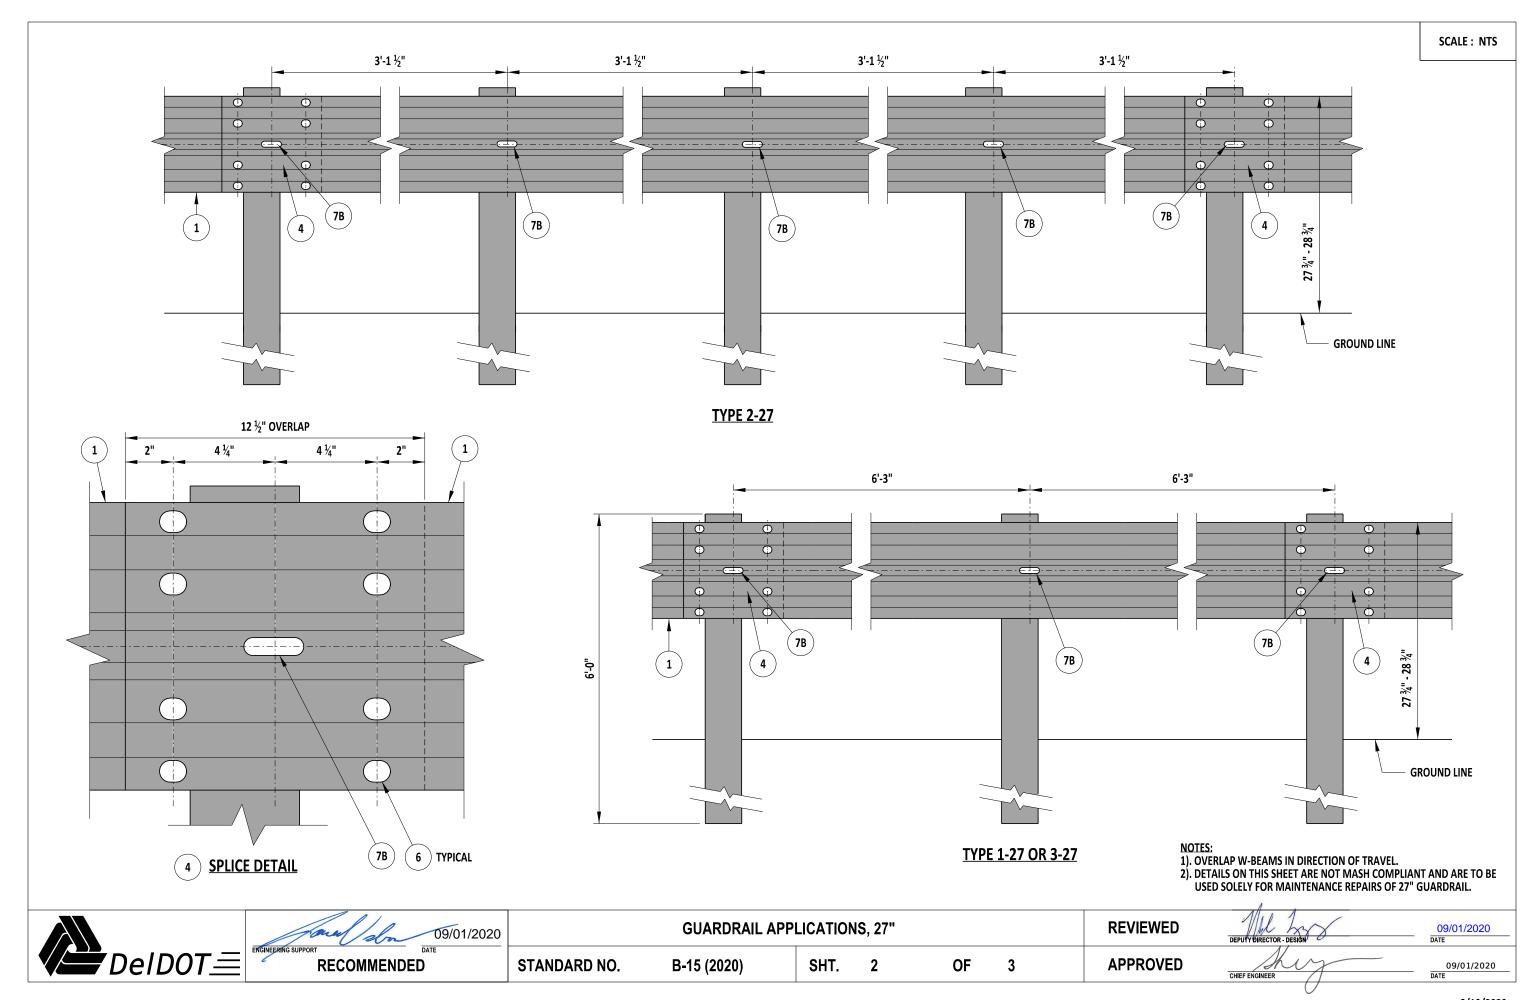


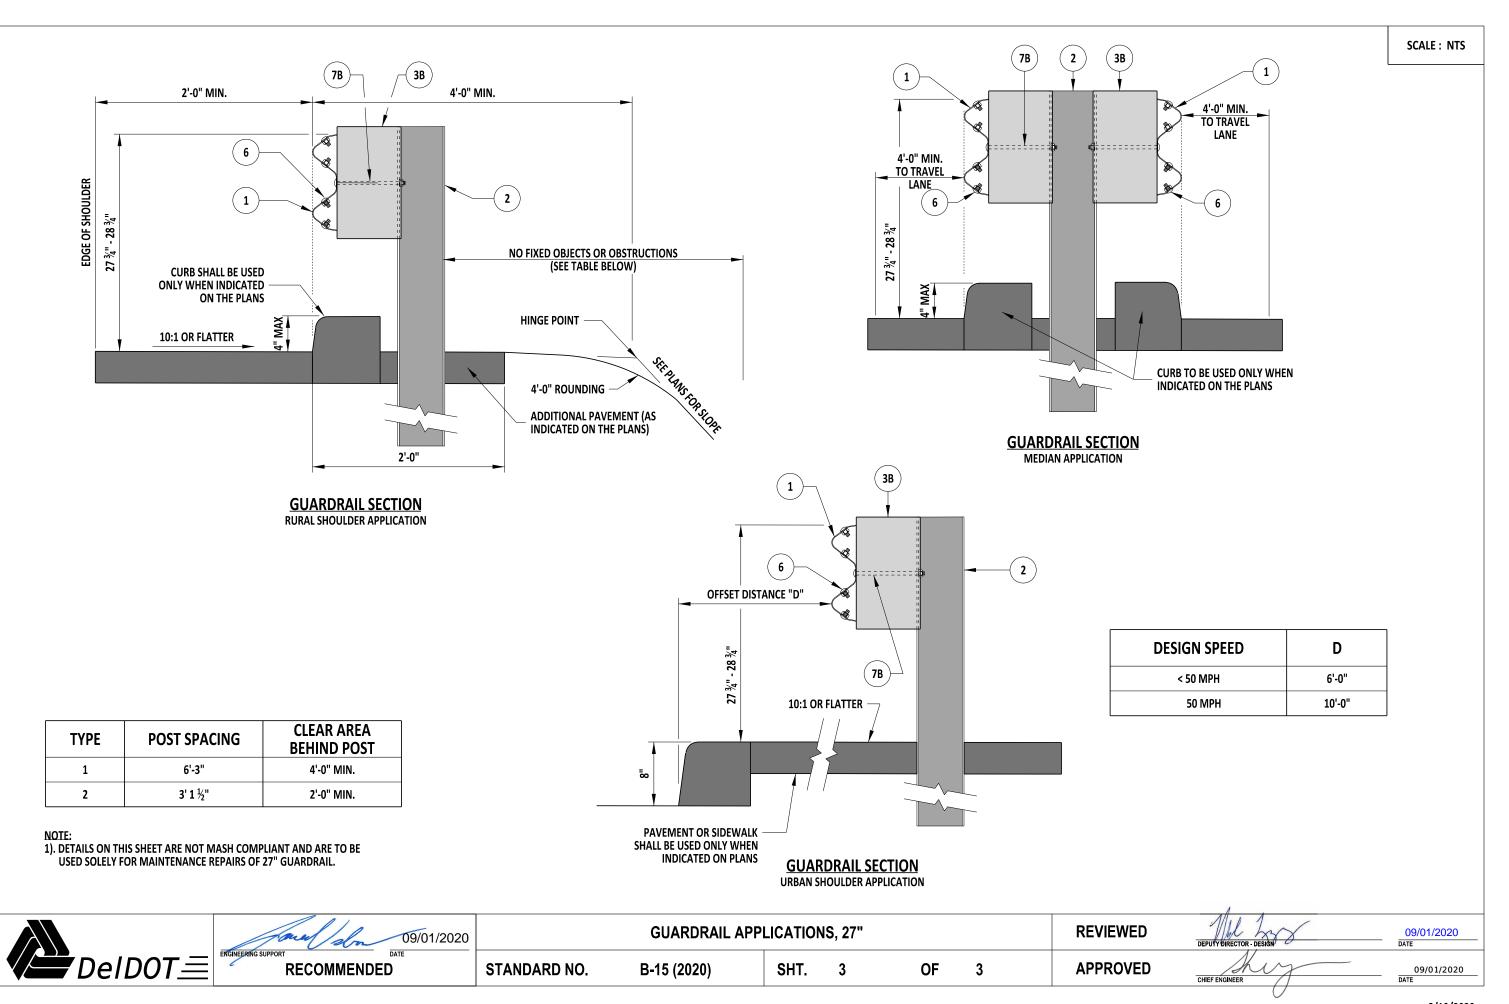


B-16 DETAIL RESERVED LEFT BLANK FOR FUTURE




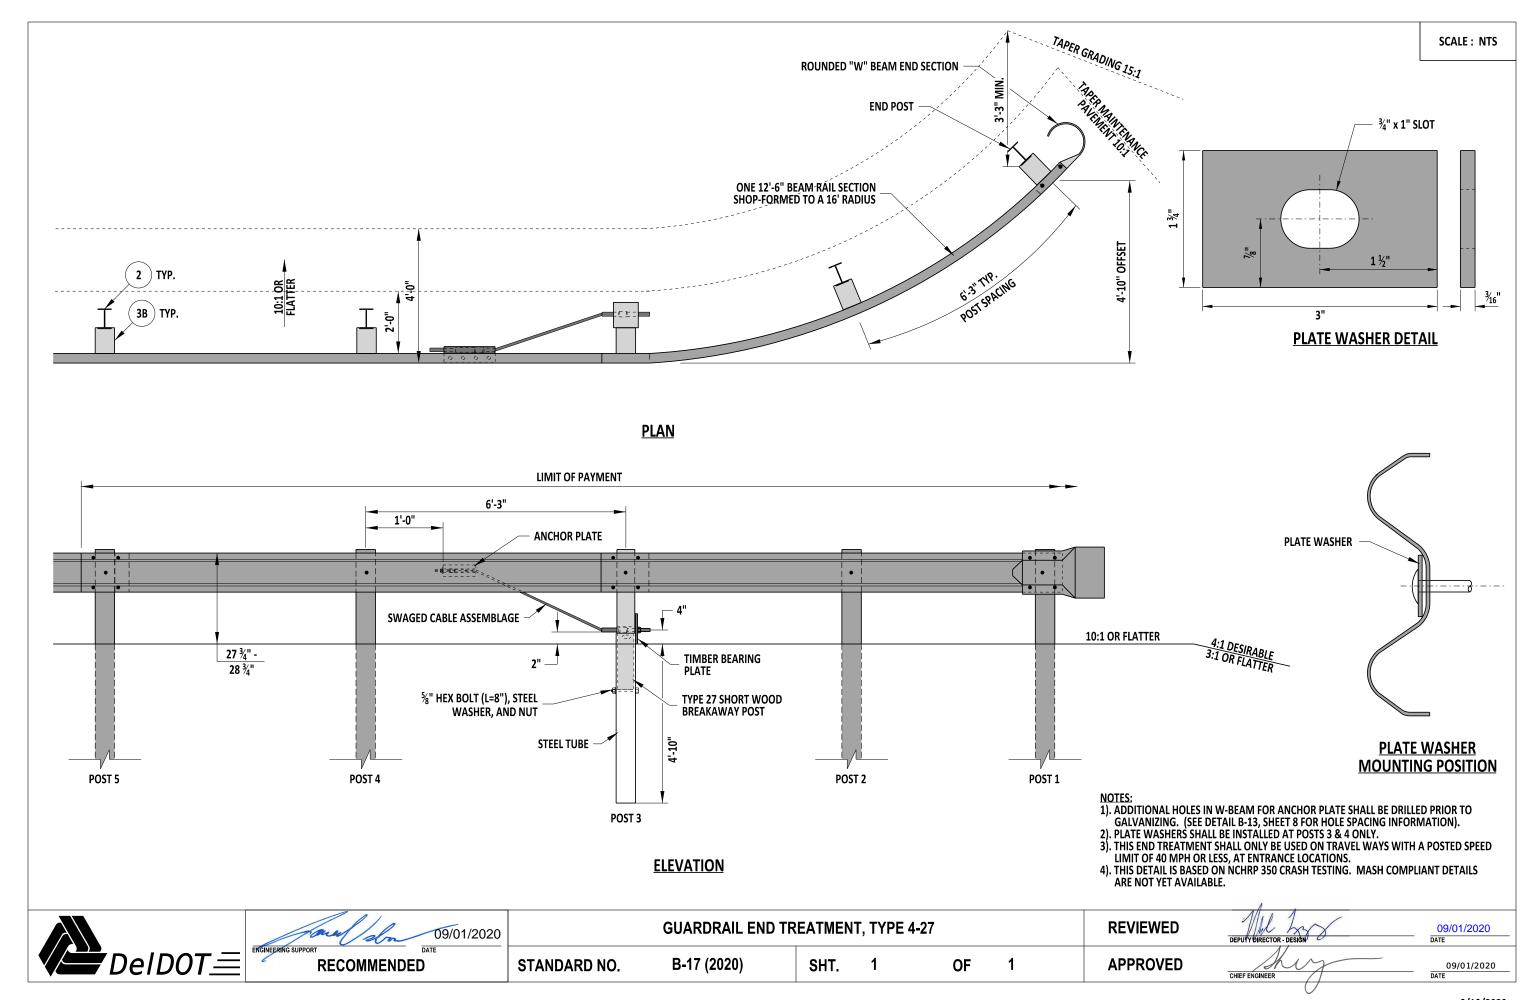

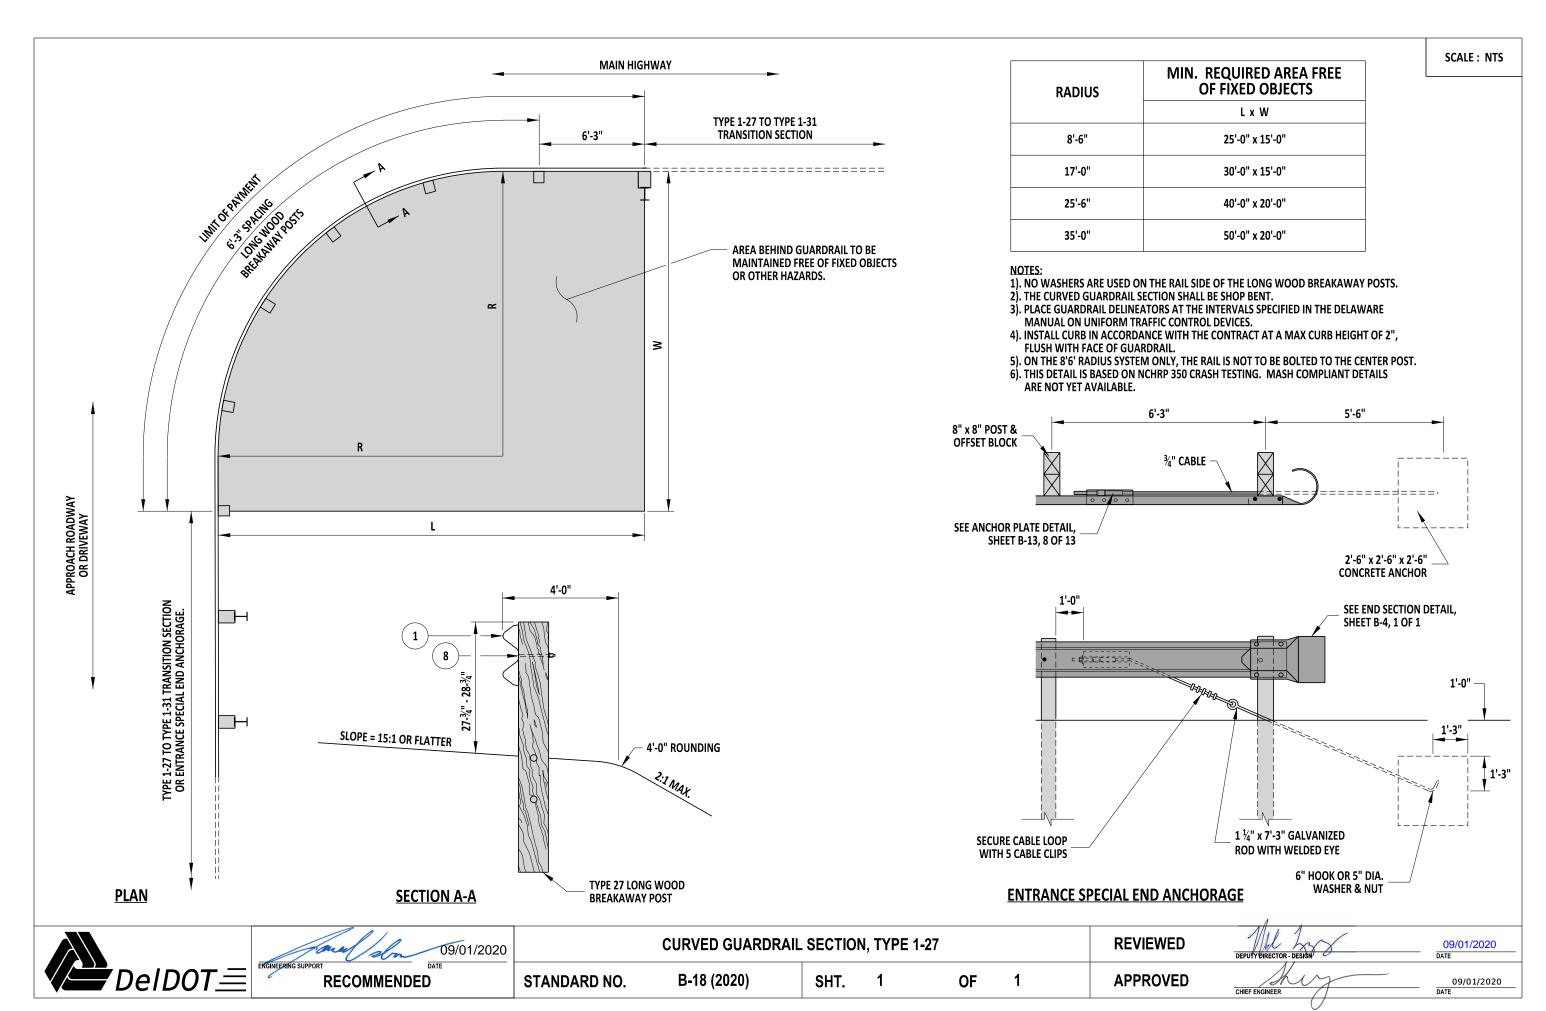

B-19 DETAIL RESERVED LEFT BLANK FOR FUTURE



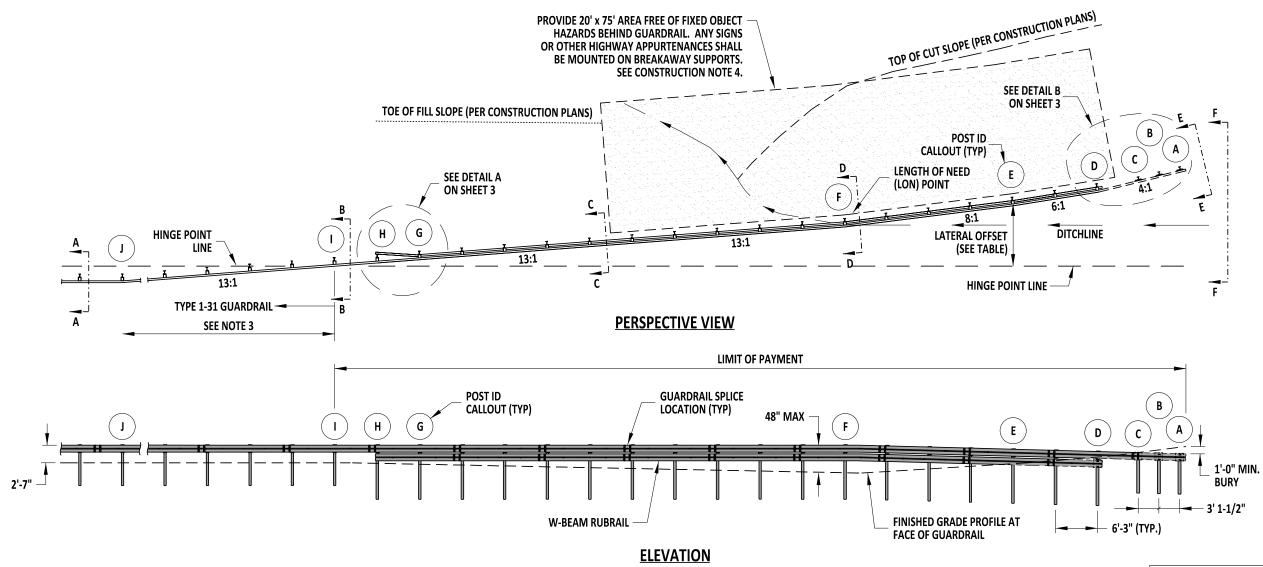

CONSTRUCTION NOTES:

- 1). THIS TERMINAL IS MASH TL-3 TESTED.
- 2). PAY LIMITS FOR BURIED-IN-BACKSLOPE TERMINAL ARE FROM POST A TO POST I. PAYMENT FOR BURIED-IN-BACKSLOPE TERMINAL INCLUDES EXCAVATION AND BACKFILL WORK ASSOCIATED WITH BURIAL FROM POST A TO POST I.
- 3). EXTEND THE TYPE 1-31 GUARDRAIL AT A 13:1, OR FLATTER, FLARE RATE FROM POST I TO POST J, WHERE THE TYPICAL GUARDRAIL RUN IS PARALLEL TO THE SHOULDER. FIELD BEND W-BEAM RAIL ELEMENT TO TRANSITION FROM THE 13:1 FLARE TO PARALLEL TO THE SHOULDER AT POST J.
- 4). PROVIDE A 20' x 75' OBJECT FREE AREA WHEN BACKSLOPES ARE FLATTER THAN 2:1. WHEN REQUIRED, THIS WORK IS SUBSIDIARY TO THE BURIED-IN-BACKSLOPE TERMINAL.
- 5). CURB IS NOT PERMITTED WITHIN THE LIMIT OF PAYMENT.
- 6). MASH COMPLIANT DESIGN BASED ON TTI REPORT NO. 608431-01-1&2.

DESIGN NOTES:

1). THE LENGTH OF NEED (LON) POINT SHOWN ON THIS SHEET IS FOR THE CONDITIONS SHOWN IN THE SECTIONS ON SHEET 2. FOR OTHER FORESLOPE CONDITIONS, THE LON POINT IS WHERE THE TOP OF THE RAIL HEIGHT FIRST REACHES 4'-0" WITH RESPECT TO THE FINISHED GRADE AT THE FACE OF THE GUARDRAIL.

FLARE RATE TABLE					
POSTS FLARE RATE					
A-D	4:1				
D-E	6:1				
E-F	8:1				
F-I	13:1				
I-J	13:1 OR FLATTER				

LATERAL OFFSET TABLE					
OFFSET*					
14'-3"					
11'-2 1/4"					
9'-1 1/2"					
6'-0 1/4"					
3 1/4"					

*LATERAL OFFSET IS MEASURED FROM THE HINGE POINT LINE TO THE BACK OF GUARDRAIL. THESE OFFSETS APPLY ONLY FOR THE FORESLOPE AND BACKSLOPE CONDITIONS SHOWN ON THE SECTIONS ON SHEET 2. FOR OTHER FORESLOPE OR BACKSLOPE CONDITIONS, THESE OFFSETS NEED TO BE RECOMPUTED.



109/01/2020 DATE

BURIED IN BACKSLOPE END TERMINAL, TYPE 1-31

REVIEWED

JTY DIRECTOR - DESIGN

09/01/2020

RECOMMENDED STANDAR


STANDARD NO.


B-20 (2020)


SHT. 1

OF 4

APPROVED

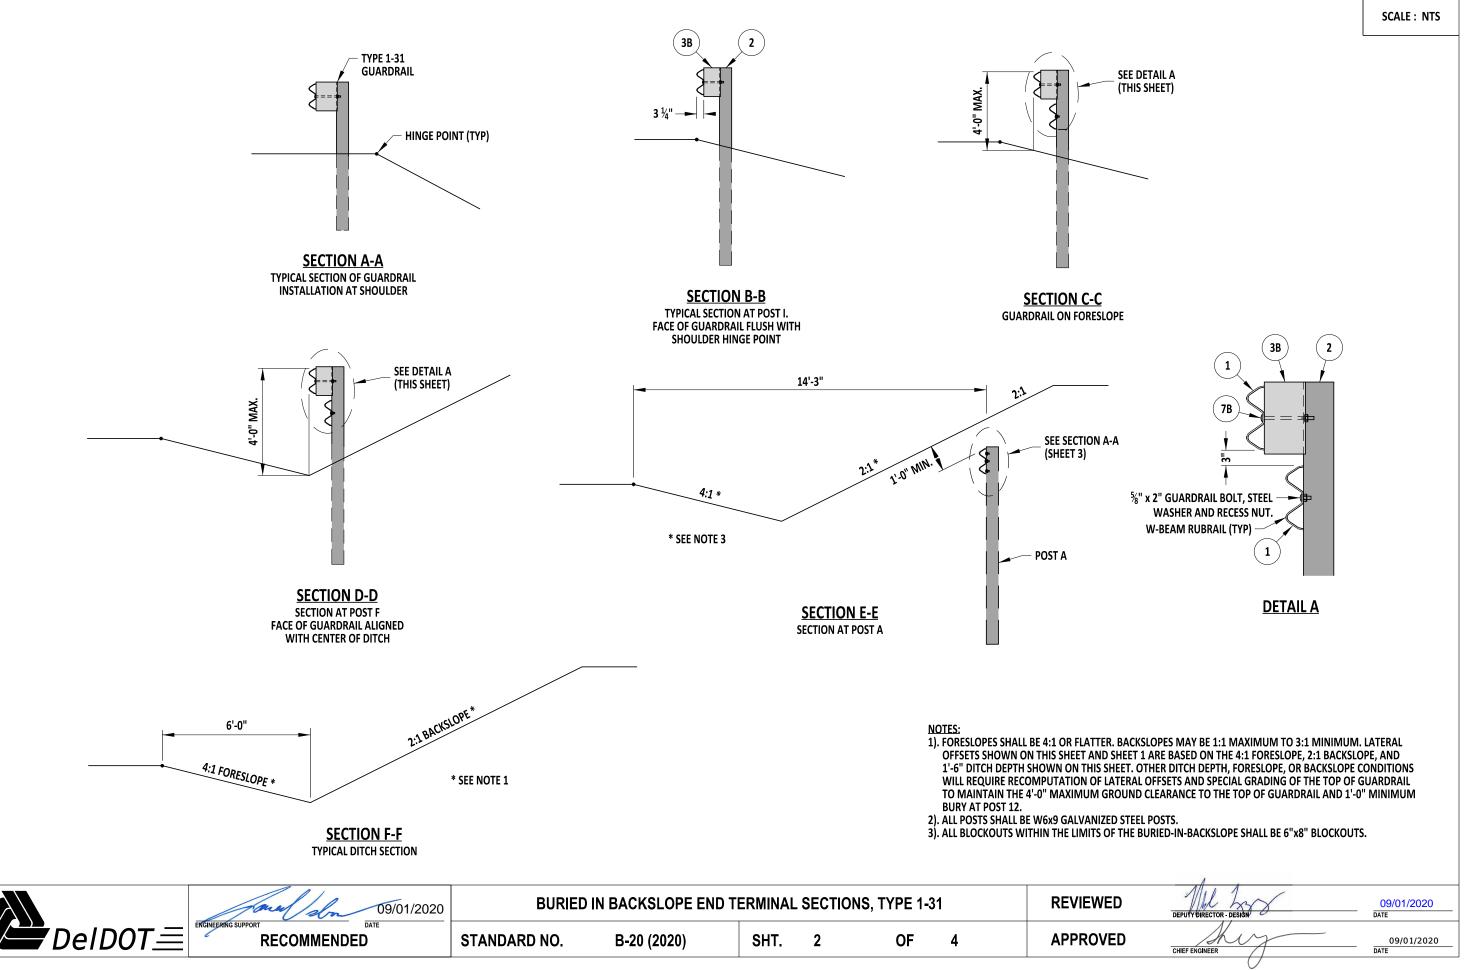

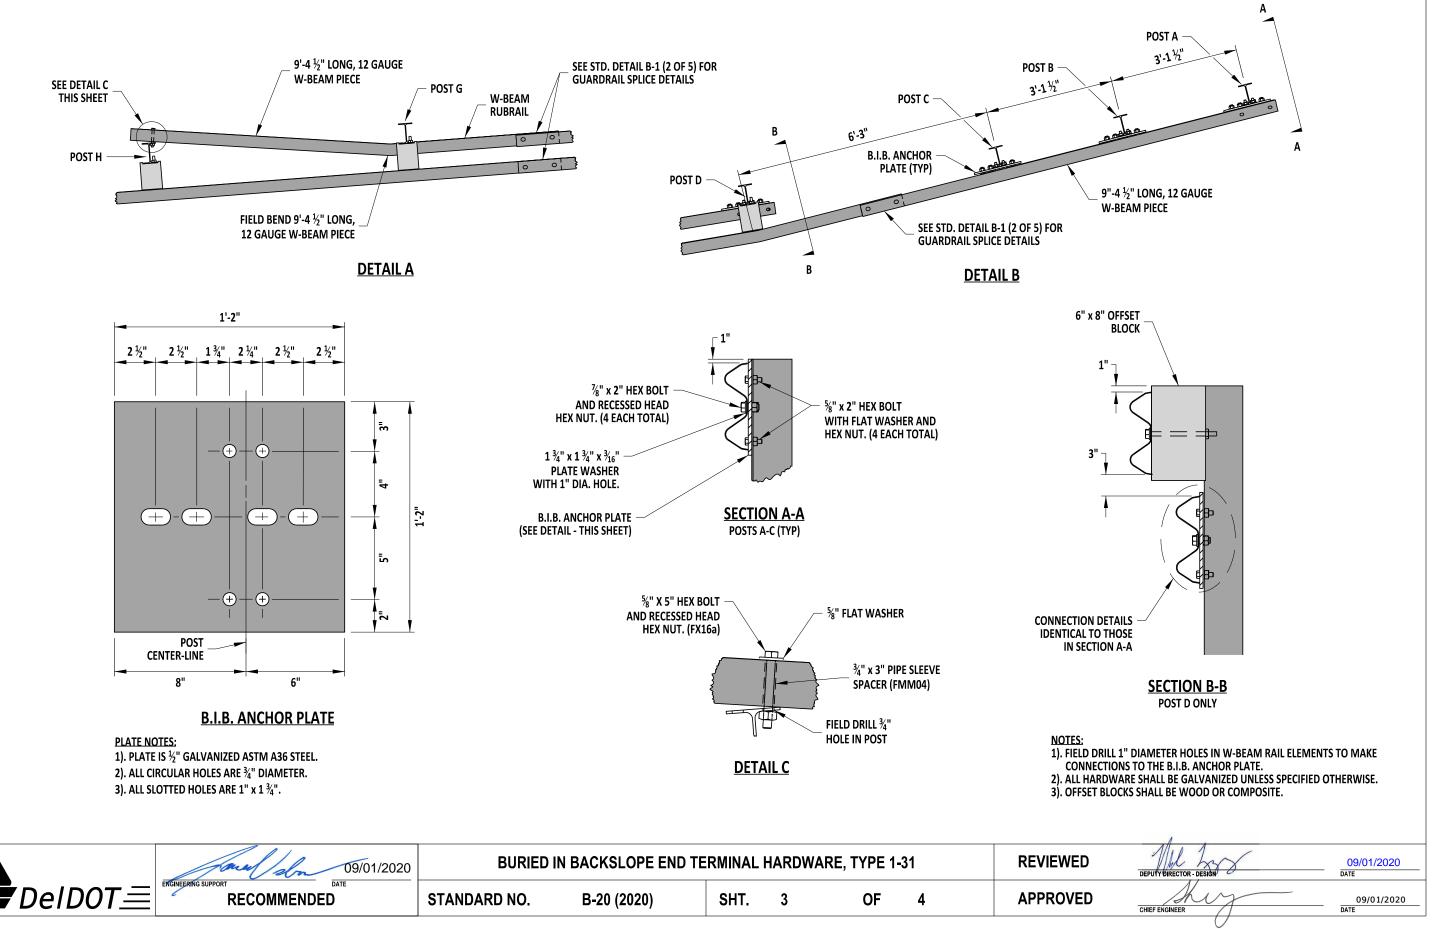


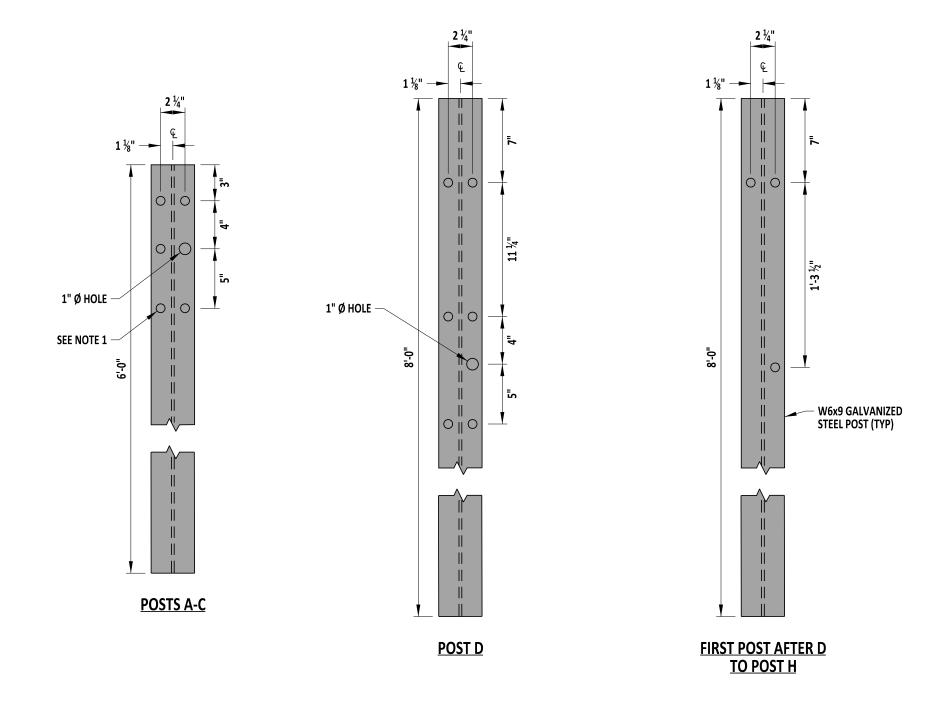


NOTES: 1). ALL POST HOLES ARE $\frac{3}{4}$ " DIAMETER, EXCEPT THOSE SHOWN AS 1" DIAMETER.

forel	BURIED IN BACKSLOPE END TERMINAL POSTS, TYPE 1-31					REVIEWED	DEPUTY BIRECTOR - DESIGN	09/01/2020 DATE		
DeIDOT RECOM	MENDED	STANDARD NO.	B-20 (2020)	SHT.	4	OF	4	APPROVED	CHIEF ENGINEER	09/01/2020 DATE


B-21 DETAIL RESERVED LEFT BLANK FOR FUTURE




B-22 DETAIL RESERVED LEFT BLANK FOR FUTURE





B-23 DETAIL RESERVED LEFT BLANK FOR FUTURE



B-24 DETAIL RESERVED LEFT BLANK FOR FUTURE



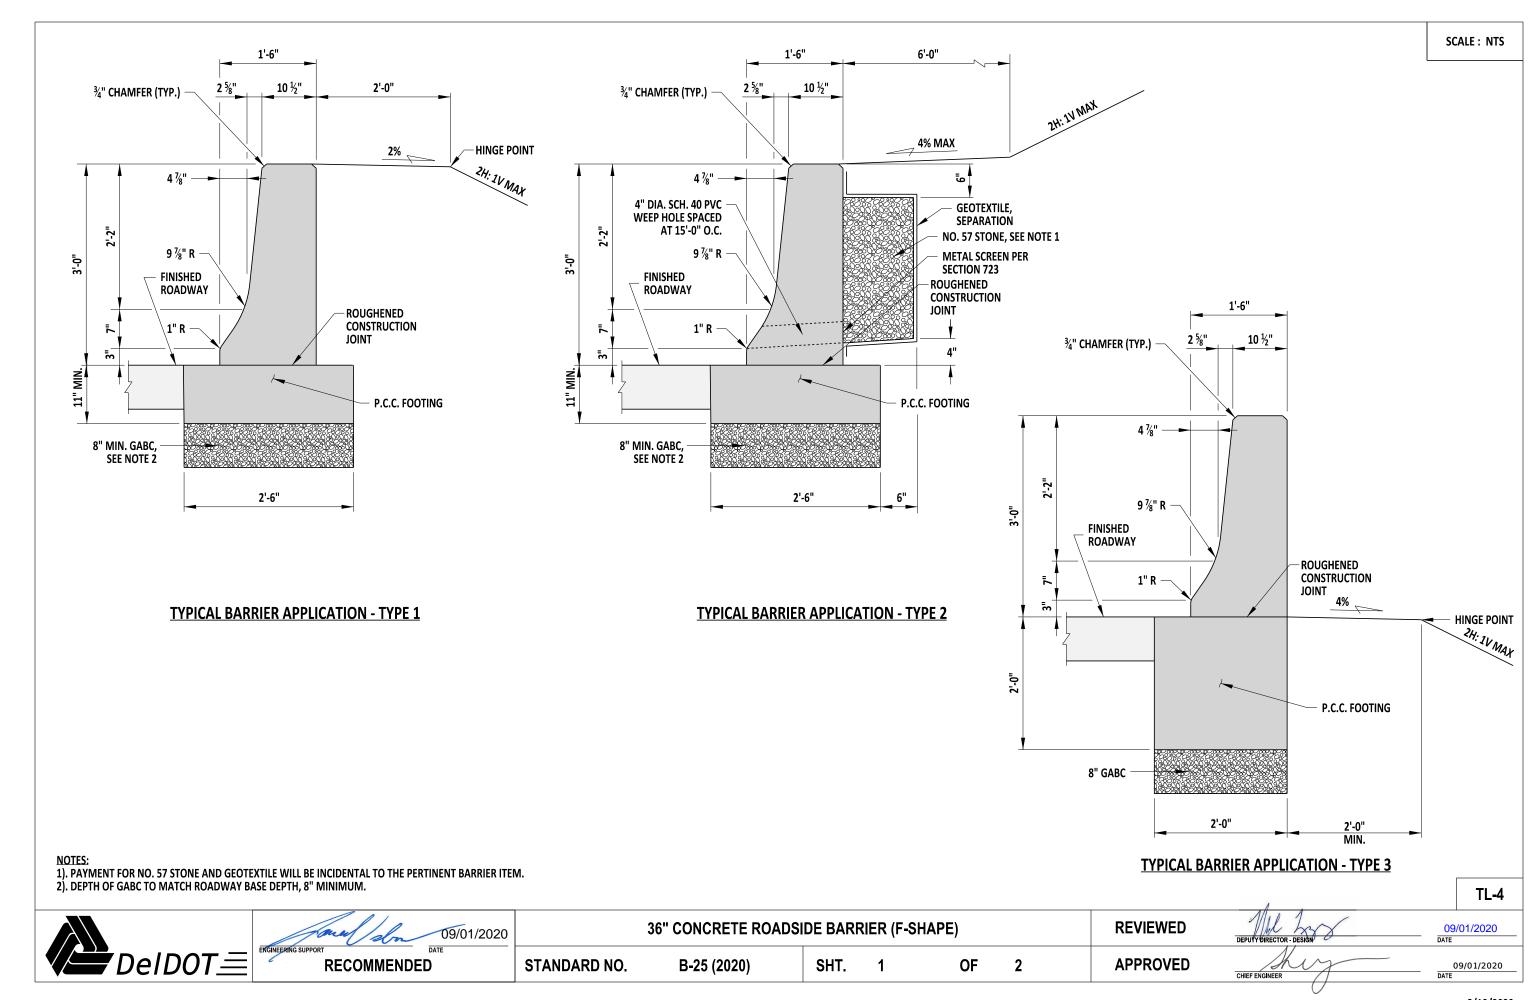

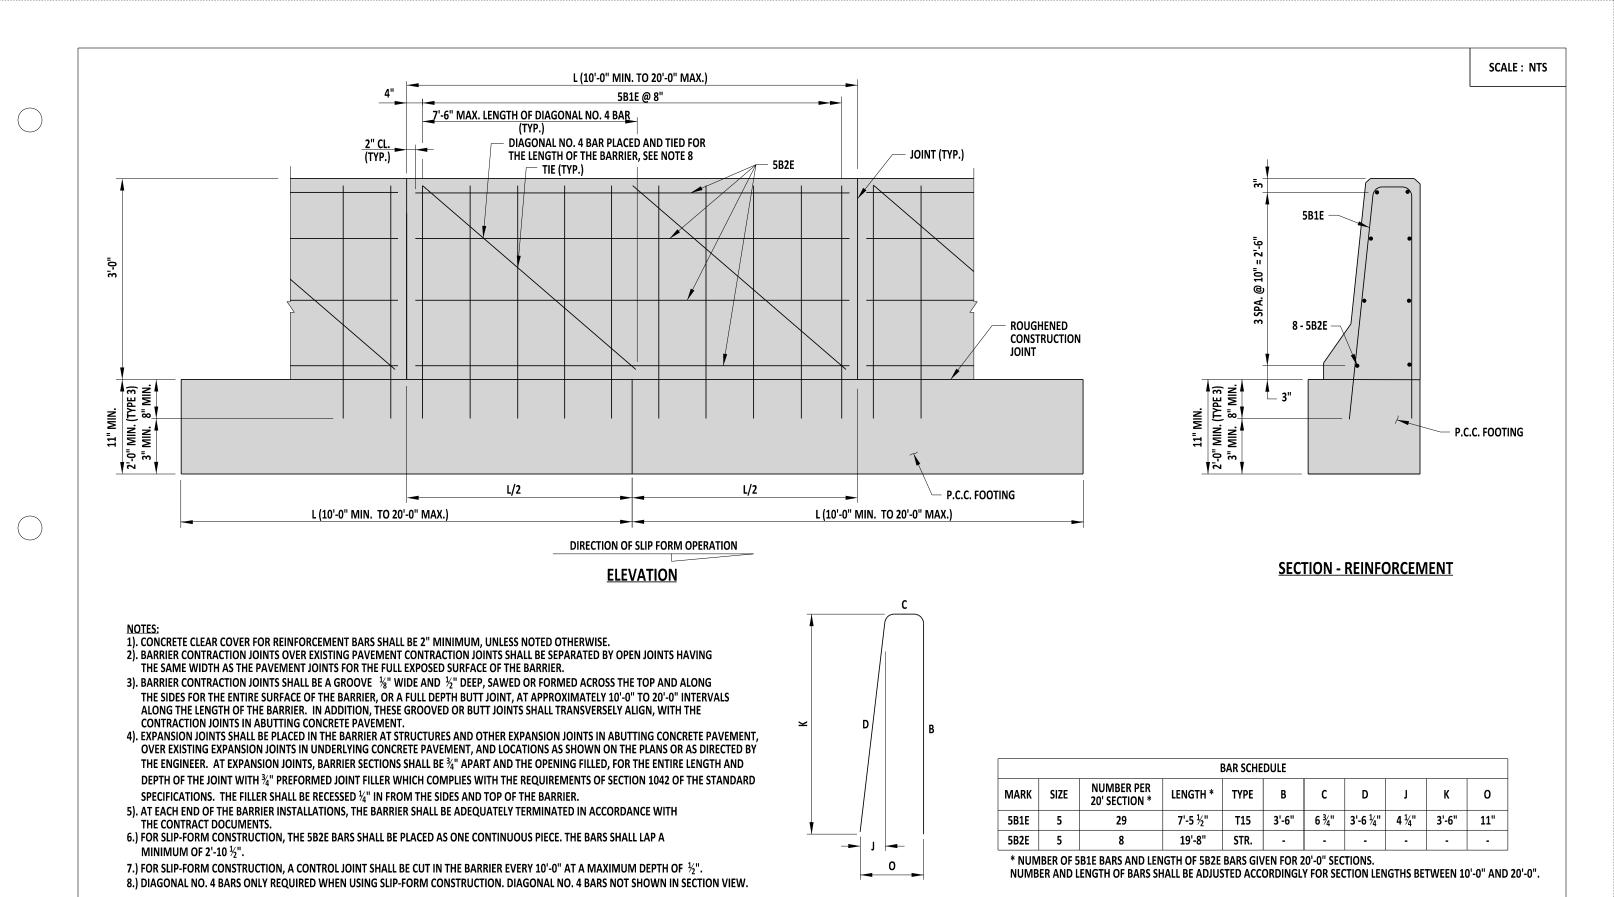

DeIDOT STANDARD NO. B-25 (2020)

36" CONCRETE ROADSIDE BARRIER (F-SHAPE)

REVIEWED

DOM:

O9/01/2020

DATE

REVIEWED

APPROVED

REVIEWED

O9/01/2020

DATE

O9/01/2020

DATE

O9/01/2020


DATE


O9/01/2020


DATE

TYPE T15 BAR

TL-4

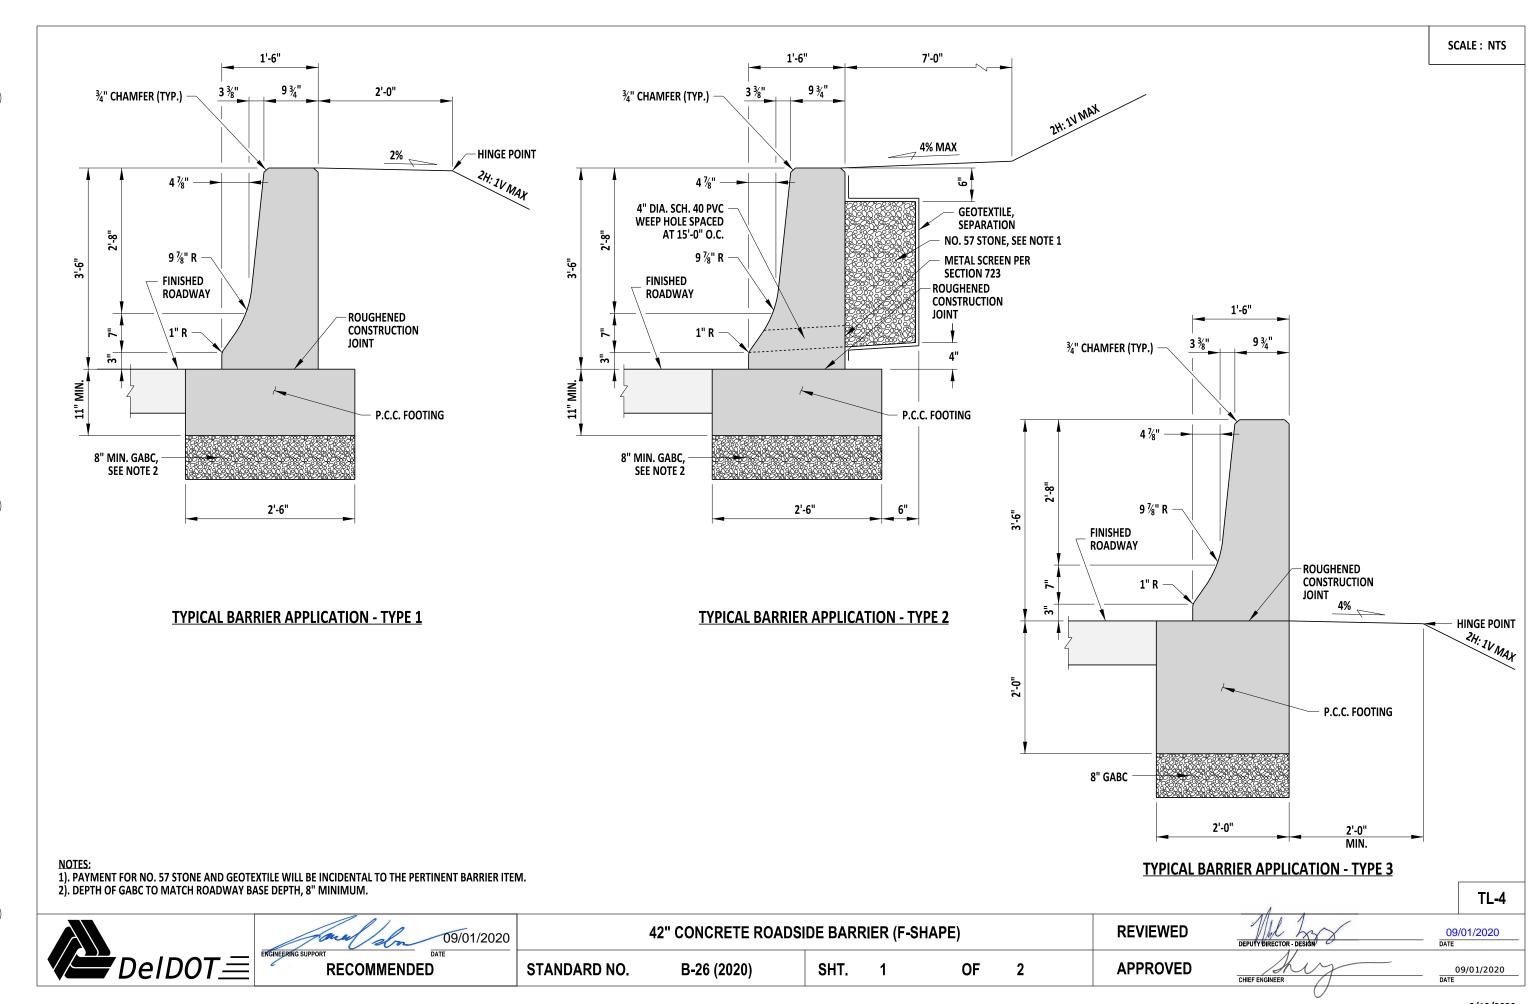

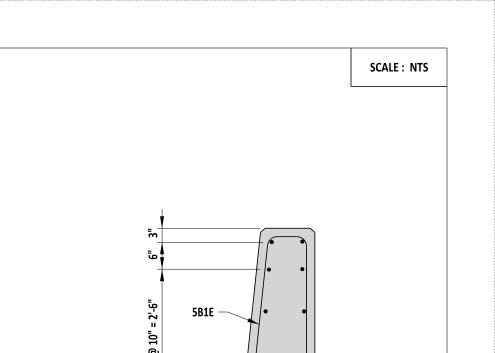

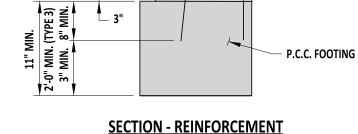


8 - 5B2E

_ 3"

L (10'-0" MIN. TO 20'-0" MAX.) 4" 5B1E @ 8" 7'-6" MAX. LENGTH OF DIAGONAL NO. 4 BAR (TYP.) **DIAGONAL NO. 4 BAR PLACED AND TIED FOR** THE LENGTH OF THE BARRIER, SEE NOTE 8 2" CL. (TYP.) JOINT (TYP.) ___ TIE (TYP.) ROUGHENED CONSTRUCTION JOINT 11" MIN. ' MIN. (TYPE 3) MIN. 8" MIN. 2,0 3,0 L/2 L/2 P.C.C. FOOTING L (10'-0" MIN. TO 20'-0" MAX.) L (10'-0" MIN. TO 20'-0" MAX.) DIRECTION OF SLIP FORM OPERATION **ELEVATION**

- 1). CONCRETE CLEAR COVER FOR REINFORCEMENT BARS SHALL BE 2" MINIMUM, UNLESS NOTED OTHERWISE.
 2). BARRIER CONTRACTION JOINTS OVER EXISTING PAVEMENT CONTRACTION JOINTS SHALL BE SEPARATED BY OPEN JOINTS HAVING THE SAME WIDTH AS THE PAVEMENT JOINTS FOR THE FULL EXPOSED SURFACE OF THE BARRIER.
- 3). BARRIER CONTRACTION JOINTS SHALL BE A GROOVE 1/8" WIDE AND 1/2" DEEP, SAWED OR FORMED ACROSS THE TOP AND ALONG THE SIDES FOR THE ENTIRE SURFACE OF THE BARRIER, OR A FULL DEPTH BUTT JOINT, AT APPROXIMATELY 10'-0" TO 20'-0" INTERVALS ALONG THE LENGTH OF THE BARRIER. IN ADDITION, THESE GROOVED OR BUTT JOINTS SHALL TRANSVERSELY ALIGN, WITH THE CONTRACTION JOINTS IN ABUTTING CONCRETE PAVEMENT.
- 4). EXPANSION JOINTS SHALL BE PLACED IN THE BARRIER AT STRUCTURES AND OTHER EXPANSION JOINTS IN ABUTTING CONCRETE PAVEMENT, OVER EXISTING EXPANSION JOINTS IN UNDERLYING CONCRETE PAVEMENT, AND LOCATIONS AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER. AT EXPANSION JOINTS, BARRIER SECTIONS SHALL BE 🐉 APART AND THE OPENING FILLED, FOR THE ENTIRE LENGTH AND DEPTH OF THE JOINT WITH 3/4" PREFORMED JOINT FILLER WHICH COMPLIES WITH THE REQUIREMENTS OF SECTION 1042 OF THE STANDARD SPECIFICATIONS. THE FILLER SHALL BE RECESSED 1/4" IN FROM THE SIDES AND TOP OF THE BARRIER.
- 5). AT EACH END OF THE BARRIER INSTALLATIONS, THE BARRIER SHALL BE ADEQUATELY TERMINATED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- 6.) FOR SLIP-FORM CONSTRUCTION, THE 5B2E BARS SHALL BE PLACED AS ONE CONTINUOUS PIECE. THE BARS SHALL LAP A MINIMUM OF 2'-10 $\frac{1}{2}$ ".
- 7.) FOR SLIP-FORM CONSTRUCTION, A CONTROL JOINT SHALL BE CUT IN THE BARRIER EVERY 10'-0" AT A MAXIMUM DEPTH OF ½".
- 8.) DIAGONAL NO. 4 BARS ONLY REQUIRED WHEN USING SLIP-FORM CONSTRUCTION. DIAGONAL NO. 4 BARS NOT SHOWN IN SECTION VIEW.



	BAR SCHEDULE										
MARK	SIZE	NUMBER PER 20' SECTION *	LENGTH *	TYPE	В	С	D	J	К	0	
5B1E	5	29	8'-4 ¾"	T15	4'-0"	6"	4'-0 1/4"	5"	4'-0"	11"	
5B2E	5	10	19'-8"	STR.	-	•	•		-	-	

* NUMBER OF 5B1E BARS AND LENGTH OF 5B2E BARS GIVEN FOR 20'-0" SECTIONS. NUMBER AND LENGTH OF BARS SHALL BE ADJUSTED ACCORDINGLY FOR SECTION LENGTHS BETWEEN 10'-0" AND 20'-0".

TYPE T15 BAR

TL-4

$D_{0}/D_{0}T =$
₹ DeIDOT <u>=</u>

09/01/2020 RECOMMENDED

42" CONCRETE ROADSIDE BARRIER (F-SHAPE)

REVIEWED

09/01/2020


STANDARD NO.

B-26 (2020)


SHT.

OF 2 **APPROVED**



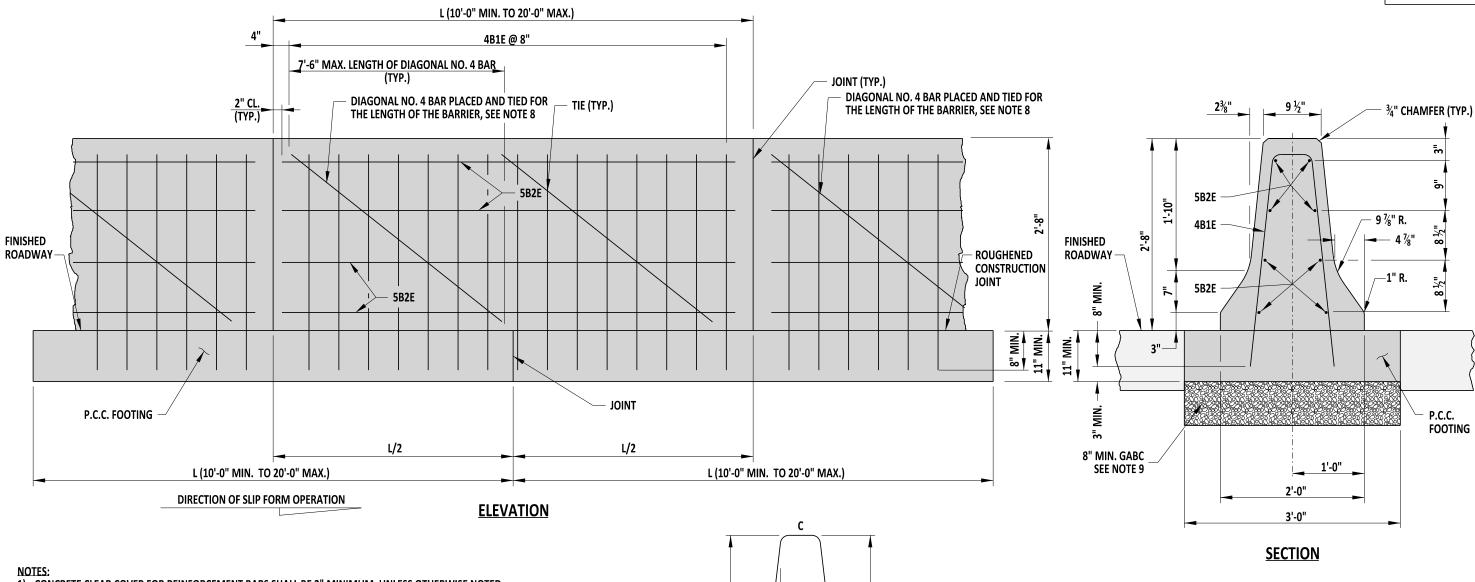

- 1). CONCRETE CLEAR COVER FOR REINFORCEMENT BARS SHALL BE 2" MINIMUM, UNLESS OTHERWISE NOTED.
- BARRIER CONTRACTION JOINTS OVER EXISTING PAVEMENT CONTRACTION JOINTS SHALL BE SEPARATED BY OPEN JOINTS HAVING THE SAME WIDTH AS THE PAVEMENT JOINTS FOR THE FULL EXPOSED SURFACE OF THE BARRIER.
- 3). BARRIER CONTRACTION JOINTS SHALL BE A GROOVE 1/8" WIDE AND 1/2" DEEP, SAWED OR FORMED ACROSS THE TOP AND ALONG THE SIDES FOR THE ENTIRE SURFACE OF THE BARRIER, OR A FULL DEPTH BUTT JOINT, AT APPROXIMATELY 10'-0" TO 20'-0" INTERVALS ALONG THE LENGTH OF THE BARRIER. IN ADDITION, THESE GROOVED OR BUTT JOINTS SHALL TRANSVERSELY ALIGN, WITH THE CONTRACTION JOINTS IN ABUTTING CONCRETE PAVEMENT.
- 4). EXPANSION JOINTS SHALL BE PLACED IN THE BARRIER AT STRUCTURES AND OTHER EXPANSION JOINTS IN ABUTTING CONCRETE PAVEMENT, OVER EXISTING EXPANSION JOINTS IN UNDERLYING CONCRETE PAVEMENT, AND LOCATIONS AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER. AT EXPANSION JOINTS, BARRIER SECTIONS SHALL BE $rak{x}$ " APART AND THE OPENING FILLED, FOR THE ENTIRE LENGTH AND DEPTH OF THE JOINT WITH 3/4" PREFORMED JOINT FILLER WHICH COMPLIES WITH THE REQUIREMENTS OF SECTION 1042 OF THE STANDARD SPECIFICATIONS. THE FILLER SHALL BE RECESSED 1/4" IN FROM THE SIDES AND TOP OF THE BARRIER.
- 5). AT EACH END OF THE BARRIER INSTALLATIONS, THE BARRIER SHALL BE ADEQUATELY TERMINATED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- 6.) FOR SLIP-FORM CONSTRUCTION, THE 5B2E BARS SHALL BE PLACED AS ONE CONTINUOUS PIECE. THE BARS SHALL LAP A MINIMUM OF 2'-10 ½".
- 7.) FOR SLIP-FORM CONSTRUCTION, A CONTROL JOINT SHALL BE CUT IN THE BARRIER EVERY 10'-0" AT A MAXIMUM DEPTH OF 🖔
- DIAGONAL NO. 4 BARS ONLY REQUIRED WHEN USING SLIP-FORM CONSTRUCTION. DIAGONAL NO. 4 BARS NOT SHOWN IN SECTION VIEW.
- 9.) DEPTH OF GABC TO MATCH ROADWAY BASE, 8" MINIMUM.



	BAR SCHEDULE										
MARK	SIZE	NUMBER PER 20' SECTION *	LENGTH *	TYPE	В	С	D	Н	K	J	0
4B1E	4	29	6'-9 1/4"	DE10	3'-2 1/4"	6"	3'-2 1/4"	3'-2"	4"	3'-2"	1'-2"
5B2E	5	8	19'-8"	STR.							

TYPE DE10 BAR

* NUMBER OF 4B1E BARS AND LENGTH OF 5B2E BARS GIVEN FOR 20'-0" SECTIONS. NUMBER AND LENGTH OF BARS SHALL BE ADJUSTED ACCORDINGLY FOR SECTION LENGTHS BETWEEN 10'-0" AND 20'-0".

TL-3



09/01/2020 **RECOMMENDED**

STANDARD NO.

32" CONCRETE MEDIAN BARRIER (F-SHAPE)

B-27 (2020)

SHT.

OF


REVIEWED


APPROVED

09/01/2020

09/01/2020




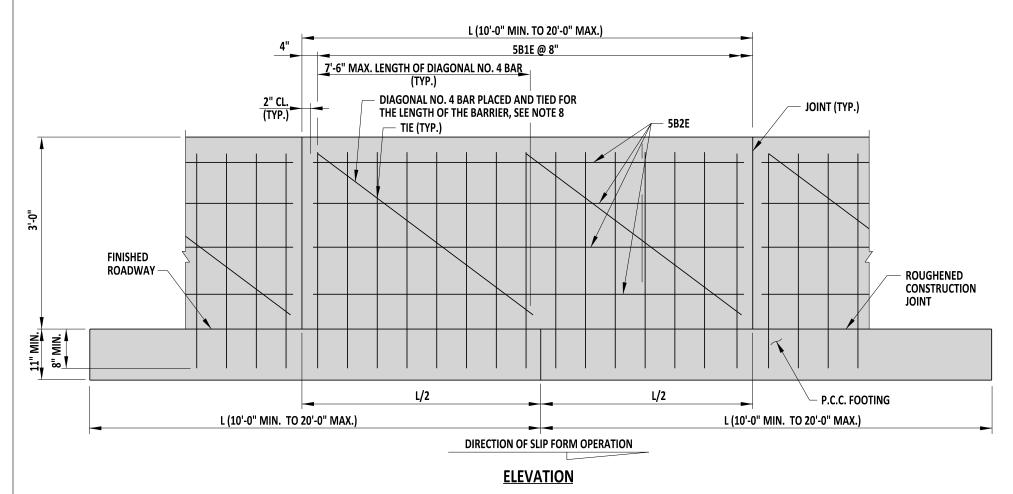

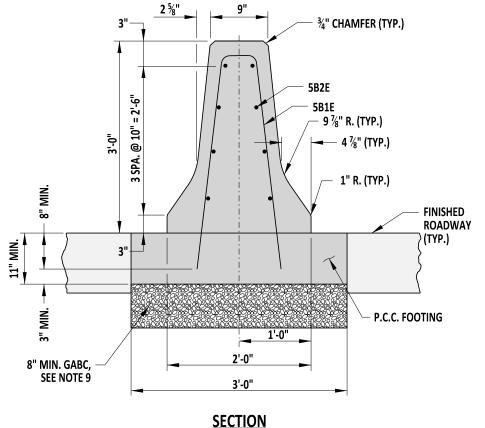

- 1). CONCRETE CLEAR COVER FOR REINFORCEMENT BARS SHALL BE 2" MINIMUM, UNLESS OTHERWISE NOTED.
- 2). BARRIER CONTRACTION JOINTS OVER EXISTING PAVEMENT CONTRACTION JOINTS SHALL BE SEPARATED BY OPEN JOINTS HAVING THE SAME WIDTH AS THE PAVEMENT JOINTS FOR THE FULL EXPOSED SURFACE OF THE BARRIER.
- 3). BARRIER CONTRACTION JOINTS SHALL BE A GROOVE 1/8" WIDE AND 1/2" DEEP, SAWED OR FORMED ACROSS THE TOP AND ALONG THE SIDES FOR THE ENTIRE SURFACE OF THE BARRIER, OR A FULL DEPTH BUTT JOINT, AT APPROXIMATELY 10'-0" TO 20'-0" INTERVALS ALONG THE LENGTH OF THE BARRIER. IN ADDITION, THESE GROOVED OR BUTT JOINTS SHALL TRANSVERSELY ALIGN, WITH THE CONTRACTION JOINTS IN ABUTTING CONCRETE PAVEMENT.
- 4). EXPANSION JOINTS SHALL BE PLACED IN THE BARRIER AT STRUCTURES AND OTHER EXPANSION JOINTS IN ABUTTING CONCRETE PAVEMENT, OVER EXISTING EXPANSION JOINTS IN UNDERLYING CONCRETE PAVEMENT, AND LOCATIONS AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER. AT EXPANSION JOINTS, BARRIER SECTIONS SHALL BE $rak{x}$ " APART AND THE OPENING FILLED, FOR THE ENTIRE LENGTH AND DEPTH OF THE JOINT WITH 3/4" PREFORMED JOINT FILLER WHICH COMPLIES WITH THE REQUIREMENTS OF SECTION 1042 OF THE STANDARD SPECIFICATIONS. THE FILLER SHALL BE RECESSED $\frac{1}{4}$ " IN FROM THE SIDES AND TOP OF THE BARRIER.
- 5). AT EACH END OF THE BARRIER INSTALLATIONS, THE BARRIER SHALL BE ADEQUATELY TERMINATED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- 6.) FOR SLIP-FORM CONSTRUCTION, THE 5B2E BARS SHALL BE PLACED AS ONE CONTINUOUS PIECE. THE BARS SHALL LAP A MINIMUM
- 7.) FOR SLIP-FORM CONSTRUCTION, A CONTROL JOINT SHALL BE CUT IN THE BARRIER EVERY 10'-0" AT A MAXIMUM DEPTH OF ½".
- 8.) DIAGONAL NO. 4 BARS ONLY REQUIRED WHEN USING SLIP-FORM CONSTRUCTION. DIAGONAL NO. 4 BARS NOT SHOWN IN SECTION VIEW.

9.) DEPTH OF GABC TO MATCH ROADWAY BASE, 8" MINIMUM.



TYPE DE10 BAR

	BAR SCHEDULE										
MARK	SIZE	NUMBER PER 20' SECTION *	LENGTH *	TYPE	В	С	D	Н	J	К	0
5B1E	5	29	7'-4 ½"	DE10	3'-6 1/4"	5 1/4"	3'-6 1/4"	3'-6"	3'-6"	4 1/4"	1'-1 ¾"
5B2E	5	8	19'-8"	STR.	-	-	-	-	-	-	-

* NUMBER OF 5B1E BARS AND LENGTH OF 5B2E BARS GIVEN FOR 20'-0" SECTIONS. NUMBER AND LENGTH OF BARS SHALL BE ADJUSTED ACCORDINGLY FOR SECTION LENGTHS BETWEEN 10'-0" AND 20'-0".

09/01/2020 **RECOMMENDED**

36" CONCRETE MEDIAN BARRIER (F - SHAPE)

STANDARD NO.

B-28 (2020)

SHT.

OF


APPROVED

REVIEWED

09/01/2020 09/01/2020 DATE


TL-4



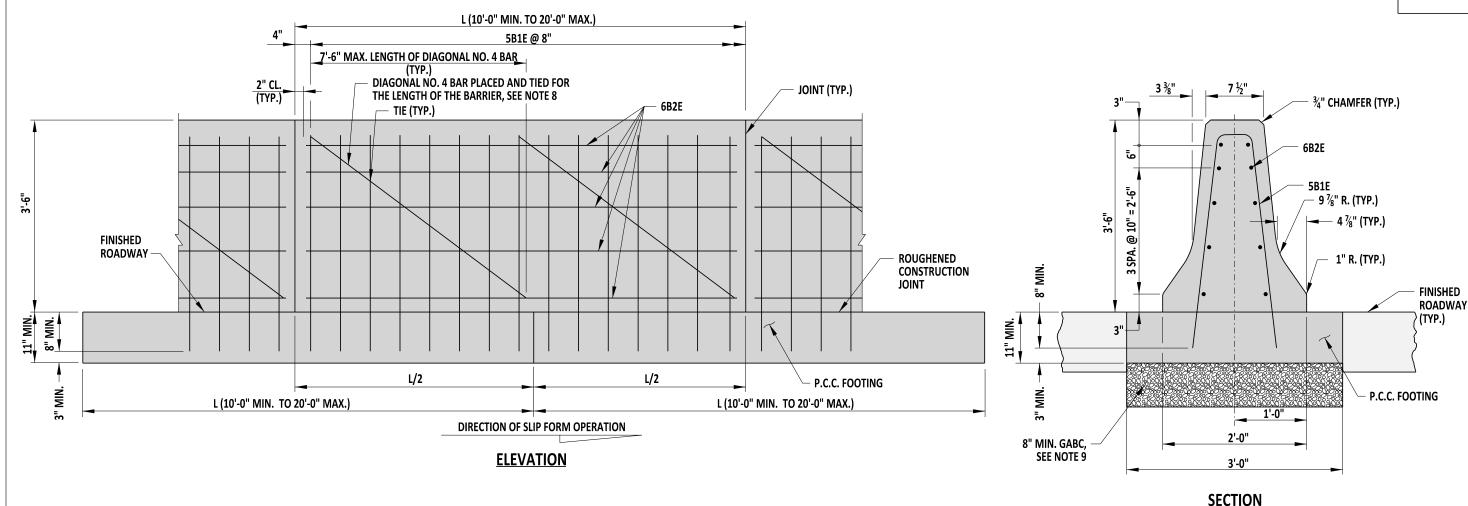

NOTES

- 1). CONCRETE CLEAR COVER FOR REINFORCEMENT BARS SHALL BE 2" MINIMUM, UNLESS OTHERWISE NOTED.
- 2). BARRIER CONTRACTION JOINTS OVER EXISTING PAVEMENT CONTRACTION JOINTS SHALL BE SEPARATED BY OPEN JOINTS HAVING THE SAME WIDTH AS THE PAVEMENT JOINTS FOR THE FULL EXPOSED SURFACE OF THE BARRIER.
- 3). BARRIER CONTRACTION JOINTS SHALL BE A GROOVE \(\frac{1}{8}\) WIDE AND \(\frac{1}{2}\) DEEP, SAWED OR FORMED ACROSS THE TOP AND ALONG THE SIDES FOR THE ENTIRE SURFACE OF THE BARRIER, OR A FULL DEPTH BUTT JOINT, AT APPROXIMATELY 10'-0" TO 20'-0" INTERVALS ALONG THE LENGTH OF THE BARRIER. IN ADDITION, THESE GROOVED OR BUTT JOINTS SHALL TRANSVERSELY ALIGN, WITH THE CONTRACTION JOINTS IN ABUTTING CONCRETE PAVEMENT.
- 4). EXPANSION JOINTS SHALL BE PLACED IN THE BARRIER AT STRUCTURES AND OTHER EXPANSION JOINTS IN ABUTTING CONCRETE PAVEMENT, OVER EXISTING EXPANSION JOINTS IN UNDERLYING CONCRETE PAVEMENT, AND LOCATIONS AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER. AT EXPANSION JOINTS, BARRIER SECTIONS SHALL BE ¾" APART AND THE OPENING FILLED, FOR THE ENTIRE LENGTH AND DEPTH OF THE JOINT WITH ¾" PREFORMED JOINT FILLER WHICH COMPLIES WITH THE REQUIREMENTS OF SECTION 1042 OF THE STANDARD SPECIFICATIONS. THE FILLER SHALL BE RECESSED ¼" IN FROM THE SIDES AND TOP OF THE BARRIER.
- 5). AT EACH END OF THE BARRIER INSTALLATIONS, THE BARRIER SHALL BE ADEQUATELY TERMINATED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- 6.) FOR SLIP-FORM CONSTRUCTION, THE 6B2E BARS SHALL BE PLACED AS ONE CONTINUOUS PIECE. THE BARS SHALL LAP A MINIMUM OF 3'-9".
- 7.) FOR SLIP-FORM CONSTRUCTION, A CONTROL JOINT SHALL BE CUT IN THE BARRIER EVERY 10'-0" AT A MAXIMUM DEPTH OF ½".
- 8.) DIAGONAL NO. 4 BARS ONLY REQUIRED WHEN USING SLIP-FORM CONSTRUCTION. DIAGONAL NO. 4 BARS NOT SHOWN IN SECTION VIEW.
- 9.) DEPTH OF GABC TO MATCH ROADWAY BASE, 8" MINIMUM.



TYPE	DE10 BAR	

	BAR SCHEDULE										
MARK	SIZE	NUMBER PER 20' SECTION *	LENGTH *	TYPE	В	С	D	Н	J	К	0
5B1E	5	29	8'-3"	DE10	4'-0 1/4"	4"	4'-0 1/4"	4'-0"	4'-0"	5"	1'-2"
6B2E	6	10	19'-8"	STR.	-	-	-	-	-	-	-

* NUMBER OF 5B1E BARS AND LENGTH OF 6B2E BARS GIVEN FOR 20'-0" SECTIONS.

NUMBER AND LENGTH OF BARS SHALL BE ADJUSTED ACCORDINGLY FOR SECTION LENGTHS BETWEEN 10'-0" AND 20'-0".

TL-4



09/01/2020

DATE

RECOMMENDED

42" CONCRETE MEDIAN BARRIER (F - SHAPE)

REVIEWED

Y DIRECTOR - DESIGN

09/01/2020 DATE

STANDARD NO.

ARD NO. B-29 (2020)


20)


SHT. 1


1


OF

APPROVED

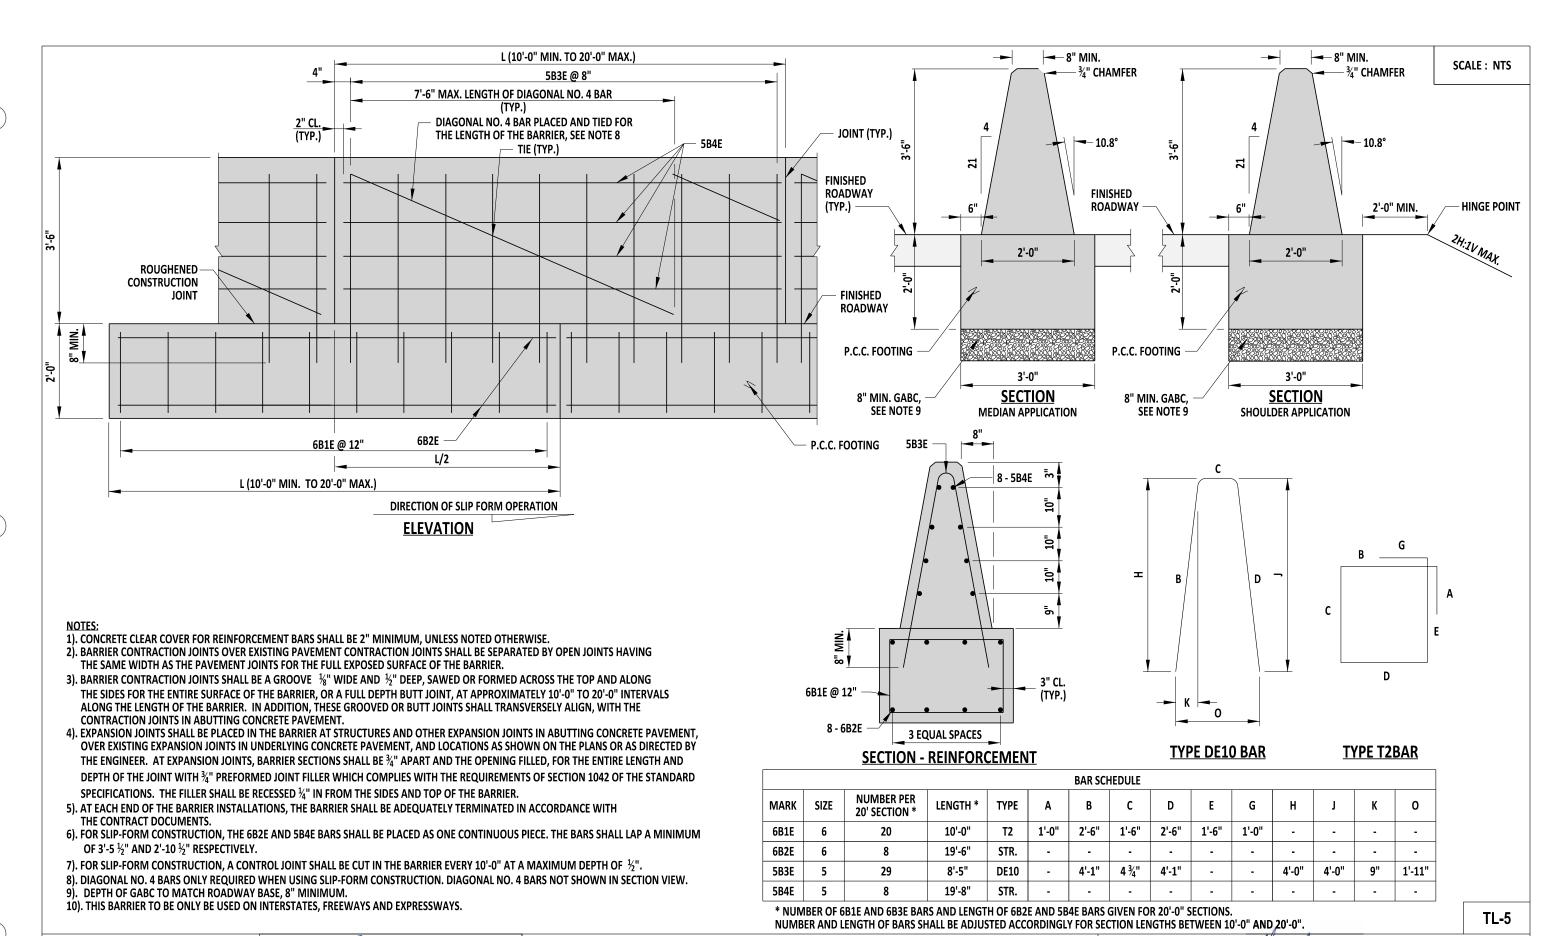


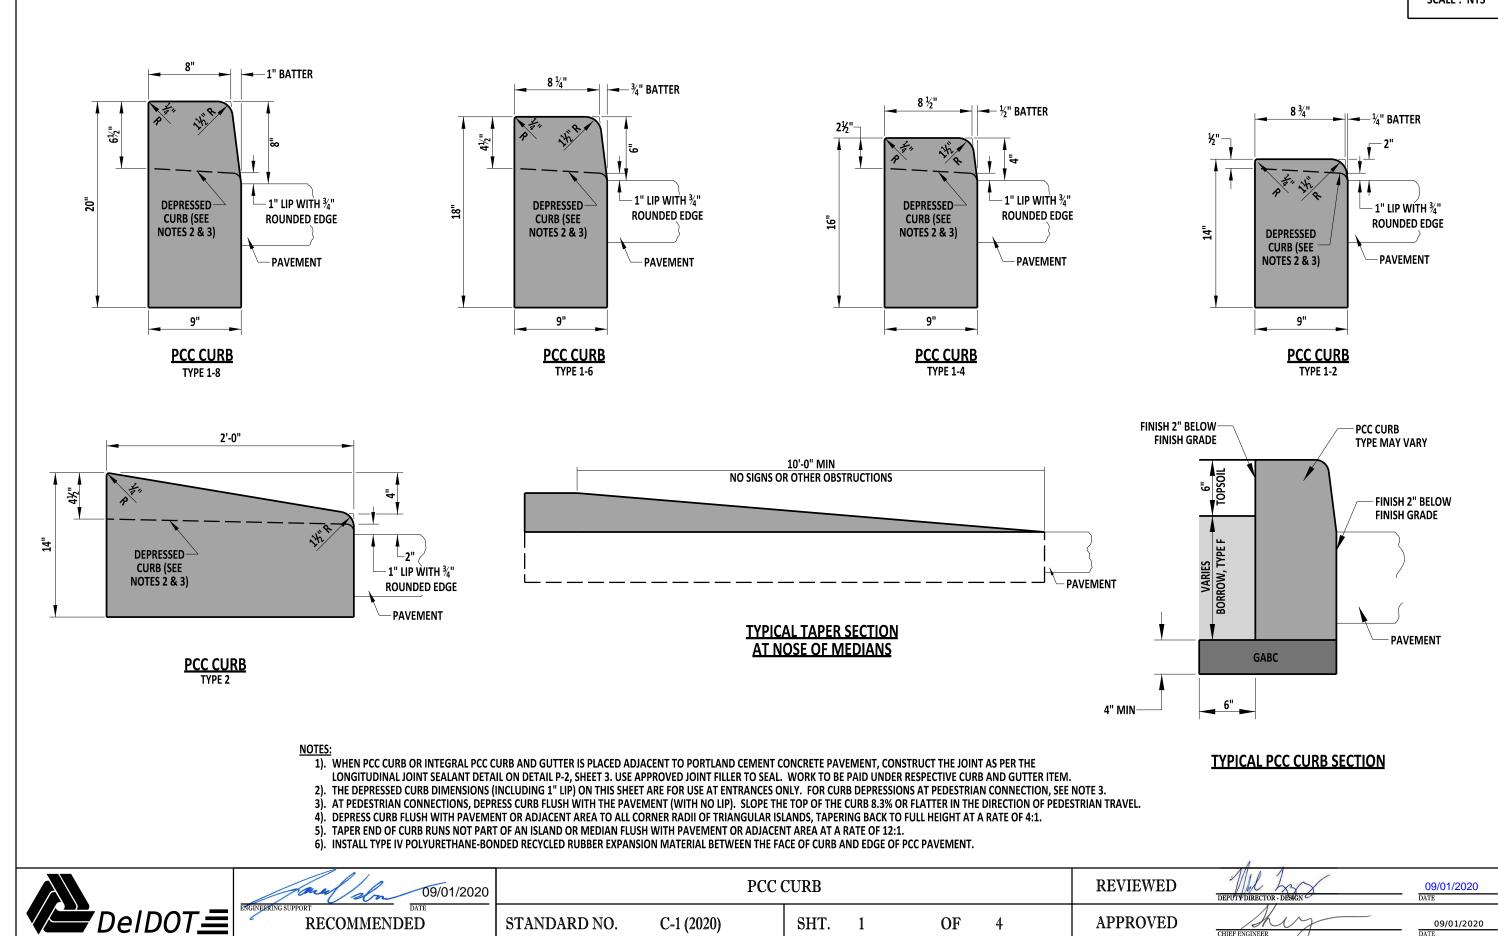

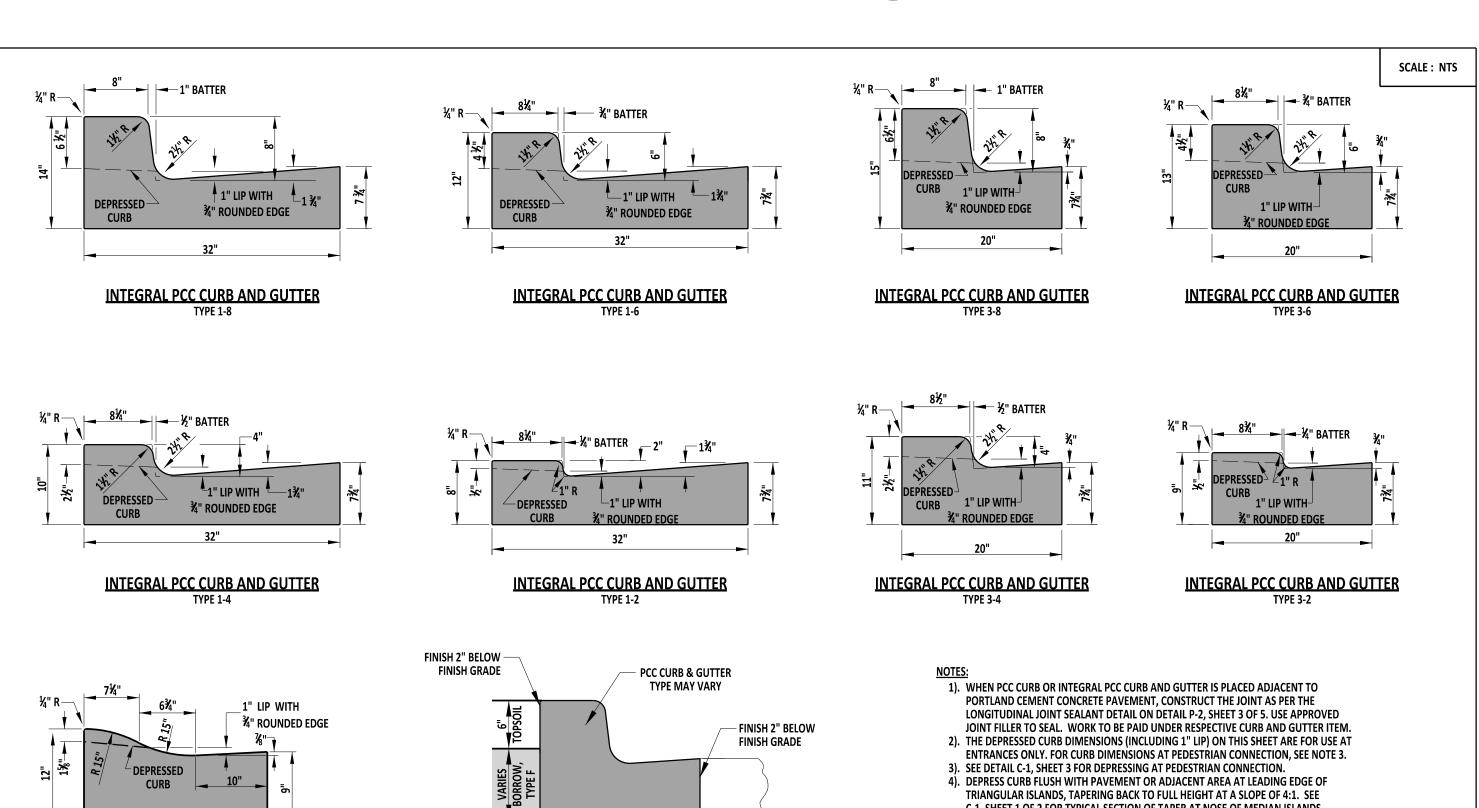




INTEGRAL PCC CURB AND GUTTER TYPE 2

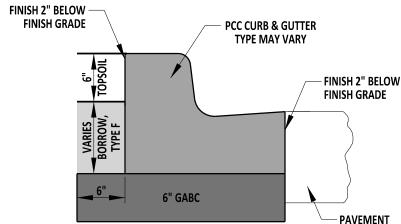



TYPICAL PCC CURB AND GUTTER SECTION


- C-1, SHEET 1 OF 2 FOR TYPICAL SECTION OF TAPER AT NOSE OF MEDIAN ISLANDS.
- 5). DEPRESS END OF CURB RUNS NOT PART OF AN ISLAND OR MEDIAN FLUSH WITH PAVEMENT OR ADJACENT AREA AT A SLOPE OF 12:1.
- 6). INSTALL TYPE IV POLYURETHANE-BONDED RECYCLED RUBBER EXPANSION MATERIAL BETWEEN THE FACE OF CURB AND EDGE OF PCC PAVEMENT.




THIS DETAIL IS TO BE USED ONLY FOR THE SECTIONS OF CURB & GUTTER THAT ARE DIRECTLY IN FRONT OF THE PEDESTRIAN CONNECTIONS. REFER TO DETAIL C-1, SHEET 2 FOR TYPICAL CURB DIMENSIONS AND FOR DEPRESSING CURB AT ENTRANCES

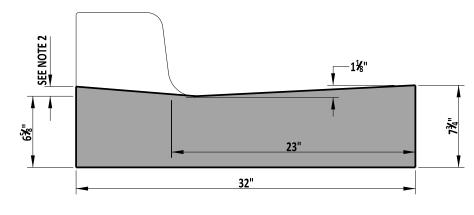



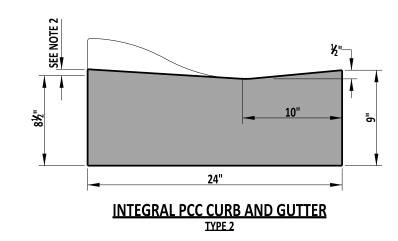



- NOTES:
 1). WHEN PCC CURB OR INTEGRAL PCC CURB AND GUTTER IS PLACED ADJACENT TO PORTLAND CEMENT CONCRETE PAVEMENT, CONSTRUCT THE JOINT AS PER THE LONGITUDINAL JOINT SEALANT DETAIL ON DETAIL P-2, SHEET 3. USE APPROVED JOINT FILLER TO SEAL. WORK TO BE PAID UNDER RESPECTIVE CURB AND GUTTER ITEM.
- 2). DEPRESS CURB FLUSH WITH PAVEMENT (WITH NO LIP). SLOPE THE TOP OF THE CURB TO MATCH THE RUNNING SLOPE OF THE ADJACENT PEDESTRIAN CONNECTION. THE MAXIMUM RUNNING SLOPE IS 8.3%. THE MAXIMUM SLOPE OF THE GUTTER PAN AT THE PEDESTRIAN CONNECTION IS 5%.
- 3). SEE TYPICAL CURB AND GUTTER SECTION DETAIL ON DETAIL C-1, SHEET 2 FOR PLACEMENT OF GABC UNDER CURB AND GUTTER.
- 4). TRANSITION FROM STANDARD GUTTER SLOPE TO SLOPE SHOWN ON THIS DETAIL OVER A DISTANCE OF 5'-0".
- 5). FOLLOW TYPICAL SECTION GABC DEPTH PER C-1, SHEET 2 OF 3.



09/01/2020

INTEGRAL PCC CURB & GUTTER (FOR USE AT PEDESTRIAN CONNECTIONS ONLY)

REVIEWED

09/01/2020

RECOMMENDED

STANDARD NO.


C-1 (2020)


SHT. 3


OF 4 **APPROVED**

CHIEF ENGINEER

09/01/2020

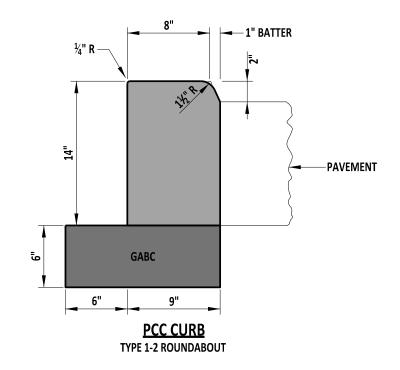

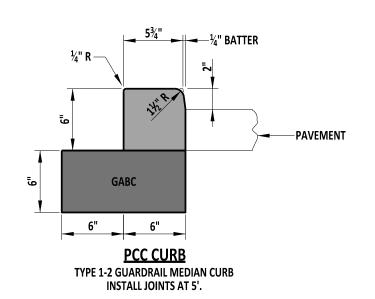

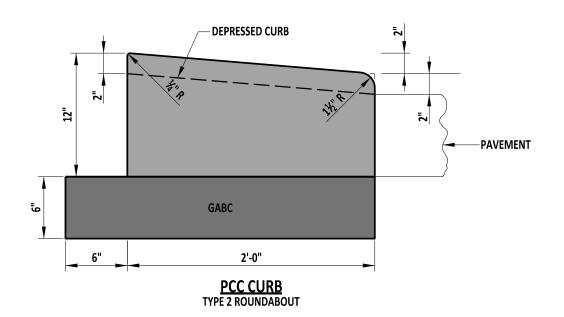

NOTE:

1). SEE TYPICAL PCC CURB SECTION DETAIL ON DETAIL C-1, SHEET 1 FOR PLACEMENT OF GABC UNDER CURB, UNLESS NOTED.

DeIDOT <u></u>	E
----------------	---

09/01/2020 RECOMMENDED

PCC ROUNDABOUT AND GUARDRAIL MEDIAN CURB STANDARD NO.

C-1 (2020)

SHT. 4


OF 4

REVIEWED APPROVED

CHIEF ENGINEER

09/01/2020 DATE




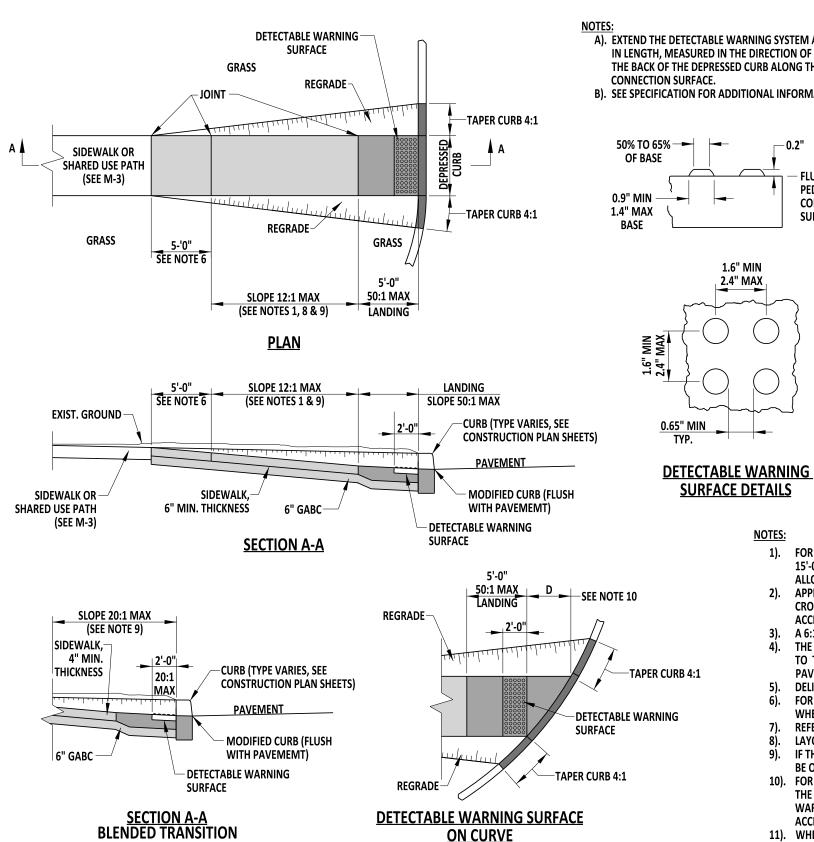

A). EXTEND THE DETECTABLE WARNING SYSTEM AT LEAST 2'-0" IN LENGTH, MEASURED IN THE DIRECTION OF TRAVEL, FROM


THE BACK OF THE DEPRESSED CURB ALONG THE PEDESTRIAN CONNECTION SURFACE.

B). SEE SPECIFICATION FOR ADDITIONAL INFORMATION.




1.6" MIN

2.4" MAX

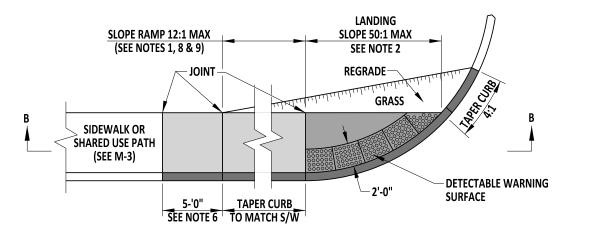

PLAN (ADJACENT TO CURB)

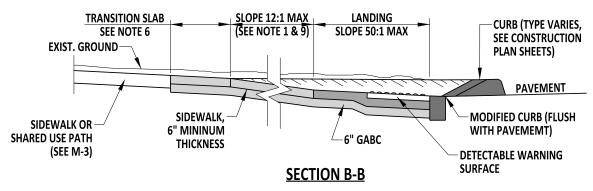

NOTES:

- FOR ALTERATIONS WHERE THE MAXIMUM ALLOWABLE 12:1 RUNNING SLOPE WILL NOT MEET THE EXISTING SIDEWALK GRADE WITHIN A LENGTH OF 15'-0" BEYOND THE LANDING, THE SLOPED SEGMENT OF THE PEDESTRIAN CONNECTION MAY BE LIMITED TO 15'-0" AT A CONSTANT SLOPE, AND ALLOWED TO EXCEED THE 12:1 MAXIMUM SLOPE.
- APPLY A 50:1 (2%) MAXIMUM CROSS SLOPE TO SIDEWALK, SHARED USE PATHS AND PEDESTRIAN CONNECTIONS. THE PEDESTRIAN CONNECTION CROSS SLOPE IS NOT TO EXCEED THE SLOPE OF THE ADJACENT ROADWAY IN ACCORDANCE WITH THE LATEST VERSION OF THE PEDESTRIAN ACCESSIBILITY STANDARDS.
- A 6:1 GRADE IS REQUIRED FOR A MINIMUM OF 2'-0" ADJACENT TO THE PEDESTRIAN CONNECTION IN ACCORDANCE WITH M-3, SHEET 1.
- THE MAXIMUM ALGEBRAIC DIFFERENCE IN GRADE BETWEEN THE PEDESTRIAN CONNECTION OR MODIFIED CURB FROM THE PEDESTRIAN CONNECTION TO THE PAVEMENT SHALL NOT EXCEED 13.3%, WITH A MAXIMUM OF 8.3% ON THE PEDESTRIAN CONNECTION AND A MAXIMUM OF 5% ON THE PAVEMENT IN THE DIRECTION OF TRAVEL. SEE DETAIL C-1, SHEET 3 OF 4.
- DELINEATE THE LANDING AREA WITH JOINTS.
- FOR 3-R REHABILITATION WORK, PLACE TRANSITION SLAB FROM THE NEW PEDESTRIAN CONNECTION TO THE EXISTING SIDEWALK WHEN THE EXISTING SIDEWALK HAS A NON-CONFORMING CROSS SLOPE OR WIDTH.
- REFER TO THE DE MUTCD FOR DETAILS REGARDING THE LOCATION OF PEDESTRIAN PUSH BUTTONS.
- LAYOUT JOINTS AND EXPANSION IN ACCORDANCE WITH M-3, SHEET 1 OF 1.
- IF THE RUNNING SLOPE OF THE PEDESTRIAN CONNECTION IS 5% (20:1) OR LESS WITH NO REQUIRED TURNING MOVEMENTS, THE LANDING CAN BE OMITTED AS IT IS A BLENDED TRANSITION. DETECTABLE WARNING SURFACE TO BE INSTALLED AS DIRECTED BY THE ENGINEER.
- FOR INSTALLATIONS ON A RADIUS AND WHEN DIMENSION D IS LESS THAN 5'-0", THE DETECTABLE WARNING SURFACE SHALL BE INSTALLED AT THE INTERSECTION OF THE BACK OF THE CURB AND THE BEGINNING OF THE FULL WIDTH OF THE PEDESTRIAN ACCESS ROUTE. THE DETECTABLE WARNING SURFACE SHALL BE INSTALLED PERPENDICULAR TO THE PATH OF PEDESTRIAN TRAVEL AND BE THE FULL WIDTH OF THE PEDESTRIAN ACCESS ROUTE.
- WHERE THERE IS NO DEPRESSED CURB AT A CUT-THROUGH OF PEDESTRIAN CONNECTION, INSTALL THE DETECTABLE WARNING SURFACE A MINIMUM OF 8" FROM THE PAVEMENT EDGE. WHERE THERE IS DEPRESSED CURB, INSTALL THE DETECTABLE WARNING SURFACE DIRECTLY BEHIND THE FULL WIDTH OF THE DEPRESSED CURB.



09/01/2020 RECOMMENDED

STANDARD NO.

PEDESTRIAN CONNECTION, TYPE 1 C-2 (2020)

PEDESTRIAN CONNECTION, TYPE 1

SHT. 1

OF

3


APPROVED

REVIEWED


CHIEF ENGINEER

09/01/2020 09/01/2020

08/20/2020

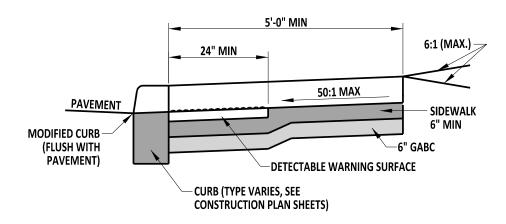


SECTION C-C

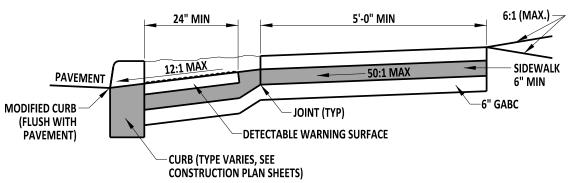

SECTION D-D


NOTES

- 1). FOR ALTERATIONS WHERE THE MAXIMUM ALLOWABLE 12:1 RUNNING SLOPE WILL NOT MEET THE EXISTING SIDEWALK GRADE WITHIN A LENGTH OF 15'-0" BEYOND THE LANDING, THE SLOPED SEGMENT OF THE PEDESTRIAN CONNECTION MAY BE LIMITED TO 15'-0" AT A CONSTANT SLOPE, AND ALLOWED TO EXCEED THE 12:1 MAXIMUM SLOPE.
- 2). APPLY A 50:1 (2%) MAXIMUM CROSS SLOPE TO SIDEWALK, SHARED USE PATHS AND PEDESTRIAN CONNECTIONS. THE PEDESTRIAN CONNECTION CROSS SLOPE IS NOT TO EXCEED THE SLOPE OF THE ADJACENT ROADWAY IN ACCORDANCE WITH THE LATEST VERSION OF THE PEDESRIAN ACCESSIBILITY STANDARDS.
- 3). A 6:1 GRADE IS REQUIRED FOR A MINIMUM OF 2'-0" ADJACENT TO THE PEDESTRIAN CONNECTION IN ACCORDANCE WITH M-3, SHEET 1.
- 4). THE MAXIMUM ALGEBRAIC DIFFERENCE IN GRADE BETWEEN THE PEDESTRIAN CONNECTION OR MODIFIED CURB FROM THE PEDESTRIAN CONNECTION TO THE PAVEMENT SHALL NOT EXCEED 13.3%, WITH A MAXIMUM OF 8.3% ON THE PEDESTRIAN CONNECTION AND A MAXIMUM OF 5% ON THE PAVEMENT IN THE DIRECTION OF TRAVEL. SEE DETAIL C-1, SHEET 3 OF 4.
- 5). DELINEATE THE LANDING AREA WITH JOINTS.
- 6). FOR 3-R REHABILITATION WORK, PLACE TRANSITION SLAB FROM THE NEW PEDESTRIAN CONNECTION TO THE EXISTING SIDEWALK WHEN THE EXISTING SIDEWALK HAS A NON-CONFORMING CROSS SLOPE OR WIDTH.
- 7). REFER TO THE DE MUTCD FOR DETAILS REGARDING THE LOCATION OF PEDESTRIAN PUSH BUTTONS.
- 8). LAYOUT JOINTS AND EXPANSION IN ACCORDANCE WITH M-3, SHEET 1 OF 1.
- 9). WHERE THERE IS NO DEPRESSED CURB AT A CUT-THROUGH OR PEDESTRIAN CONNECTION, INSTALL THE DETECTABLE WARNING SURFACE A MINIMUM OF 8" FROM THE PAVEMENT EDGE. WHERE THERE IS DEPRESSED CURB, INSTALL THE DETECTABLE WARNING SURFACE DIRECTLY BEHIND THE FULL WIDTH OF THE DEPRESSED CURB.
- 10). FOR INSTALLATIONS ON A RADIUS AND WHEN DIMENSION D IS LESS THAN 5'-0", THE DETECTABLE WARNING SURFACE SHALL BE INSTALLED AT THE INTERSECTION OF THE BACK OF THE CURB AND THE BEGINNING OF THE FULL WIDTH OF THE PEDESTRIAN ACCESS ROUTE. THE DETECTABLE WARNING SURFACE SHALL BE INSTALLED PERPENDICULAR TO THE PATH OF PEDESTRIAN TRAVEL AND BE THE FULL WIDTH OF THE PEDESTRIAN ACCESS ROUTE.

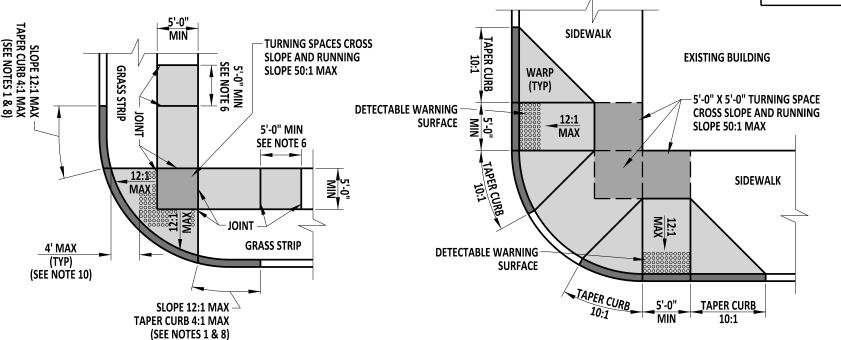

PEDESTRIAN CONNECTION. TYPE 3

PEDESTRIAN CONNECTION.TYPE 4 ** - DASHED LINES DO NOT INDICATE JOINTS

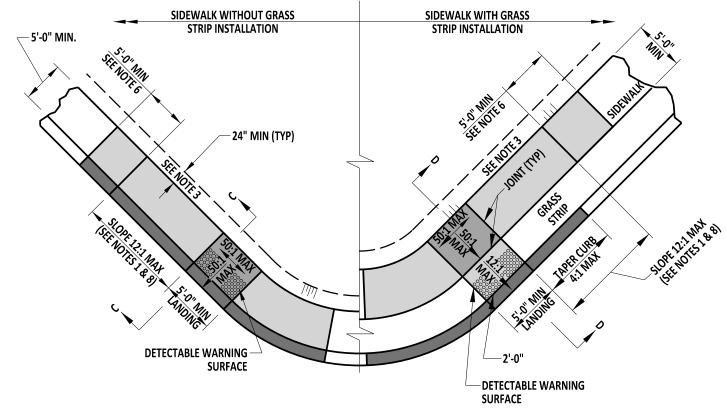

PEDESTRIAN CONNECTION. TYPE 2



GINEERING SUPPORT DATE

RECOMMENDED

PEDESTRIAN CONNECTION, TYPE 2, 3 AND 4

C-2 (2020)


STANDARD NO.


SHT. 2 OF 3 REVIEWED


APPROVED


| 09/01/2020 | DEPUTY DIRECTOR - DESIGN | DATE | 09/01/2020


CHIEF ENGINEER

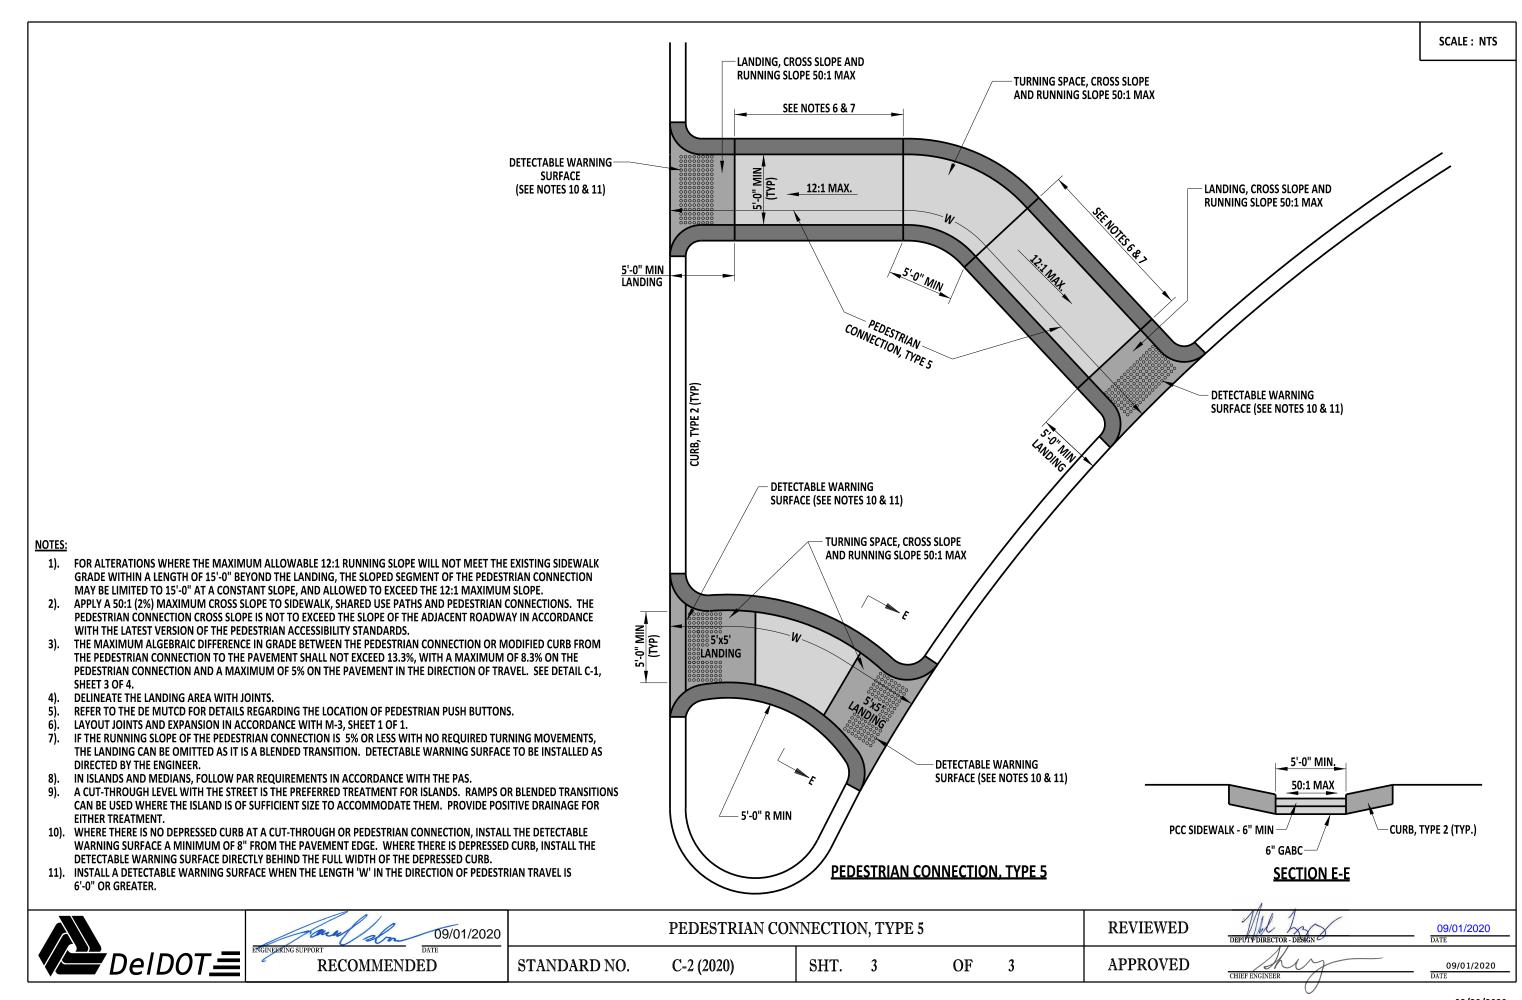


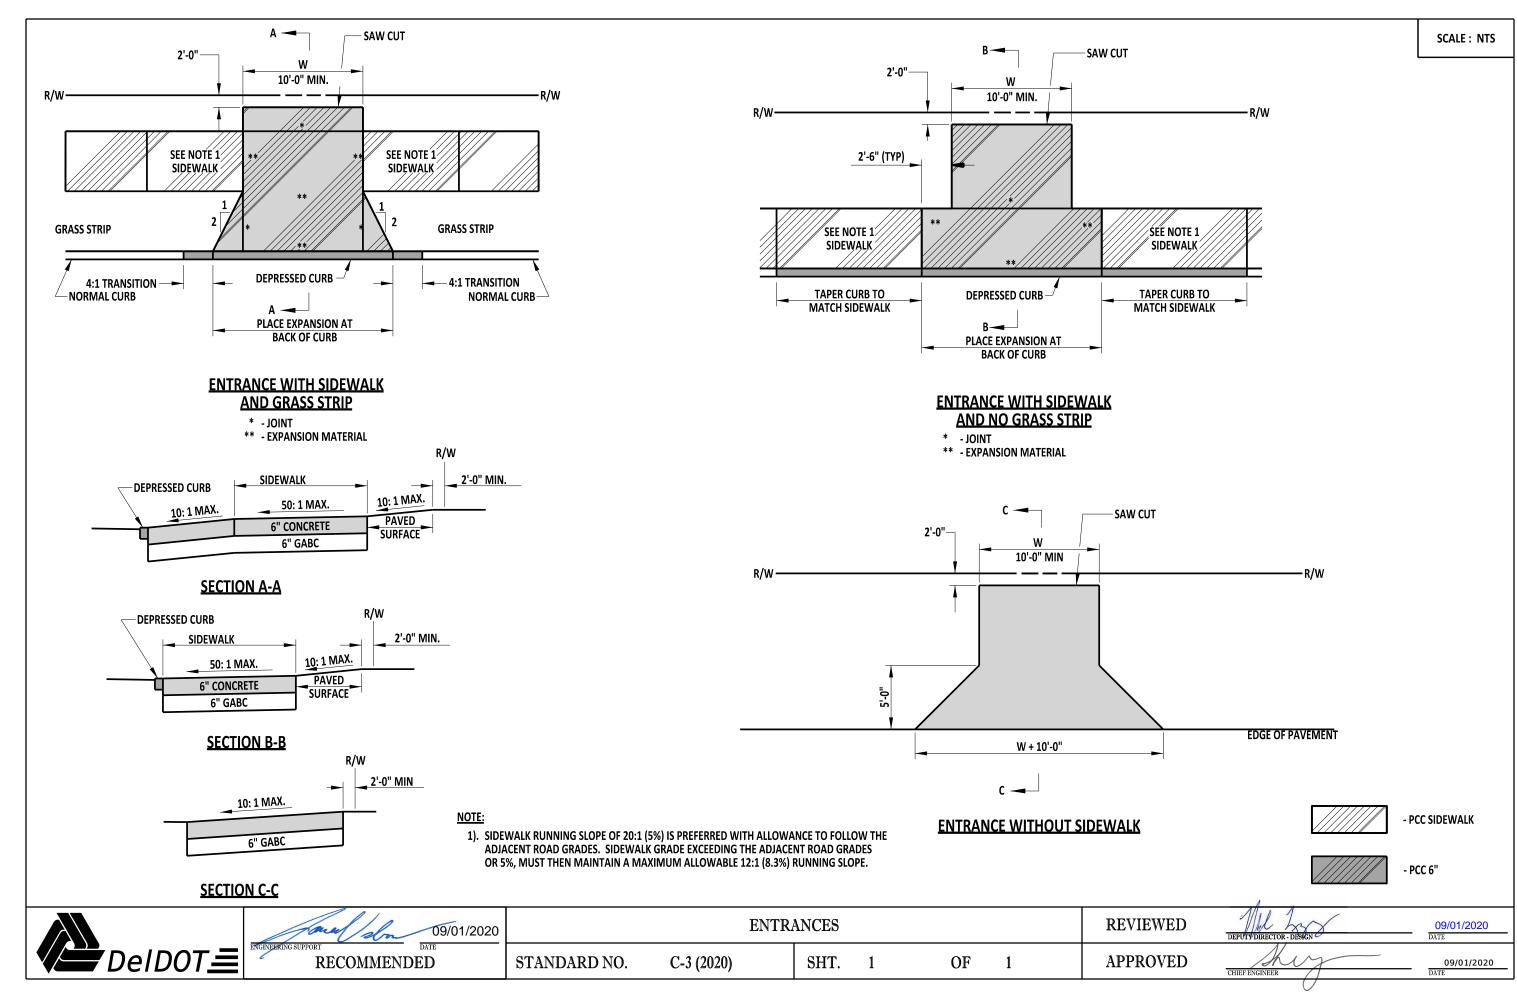

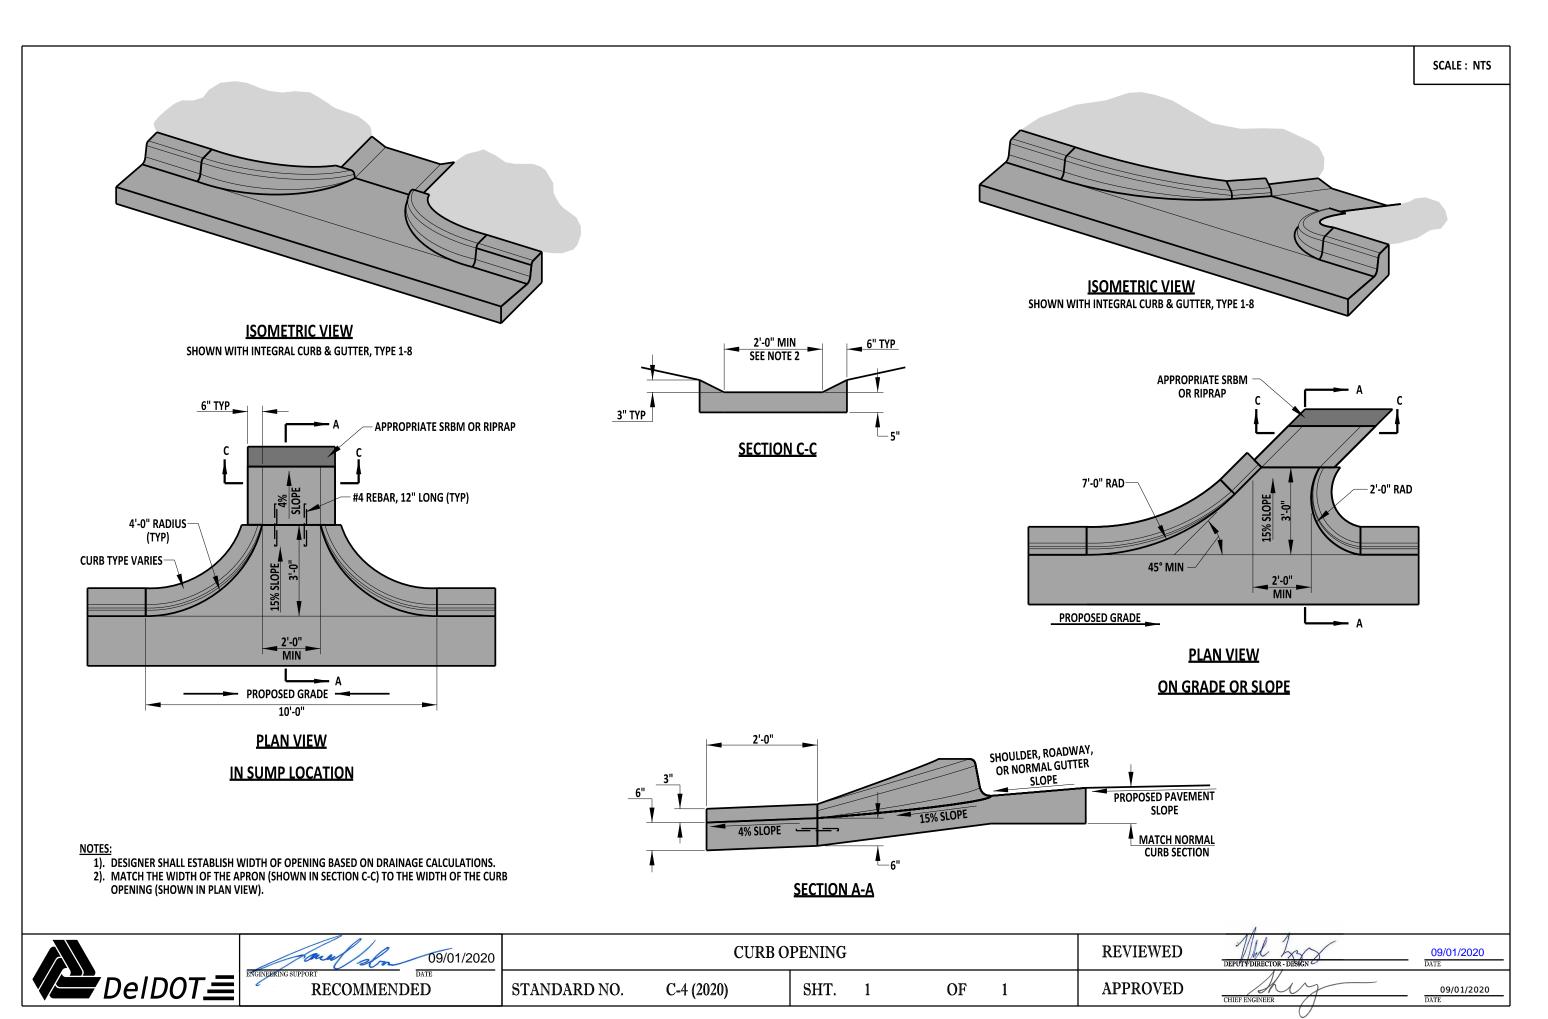

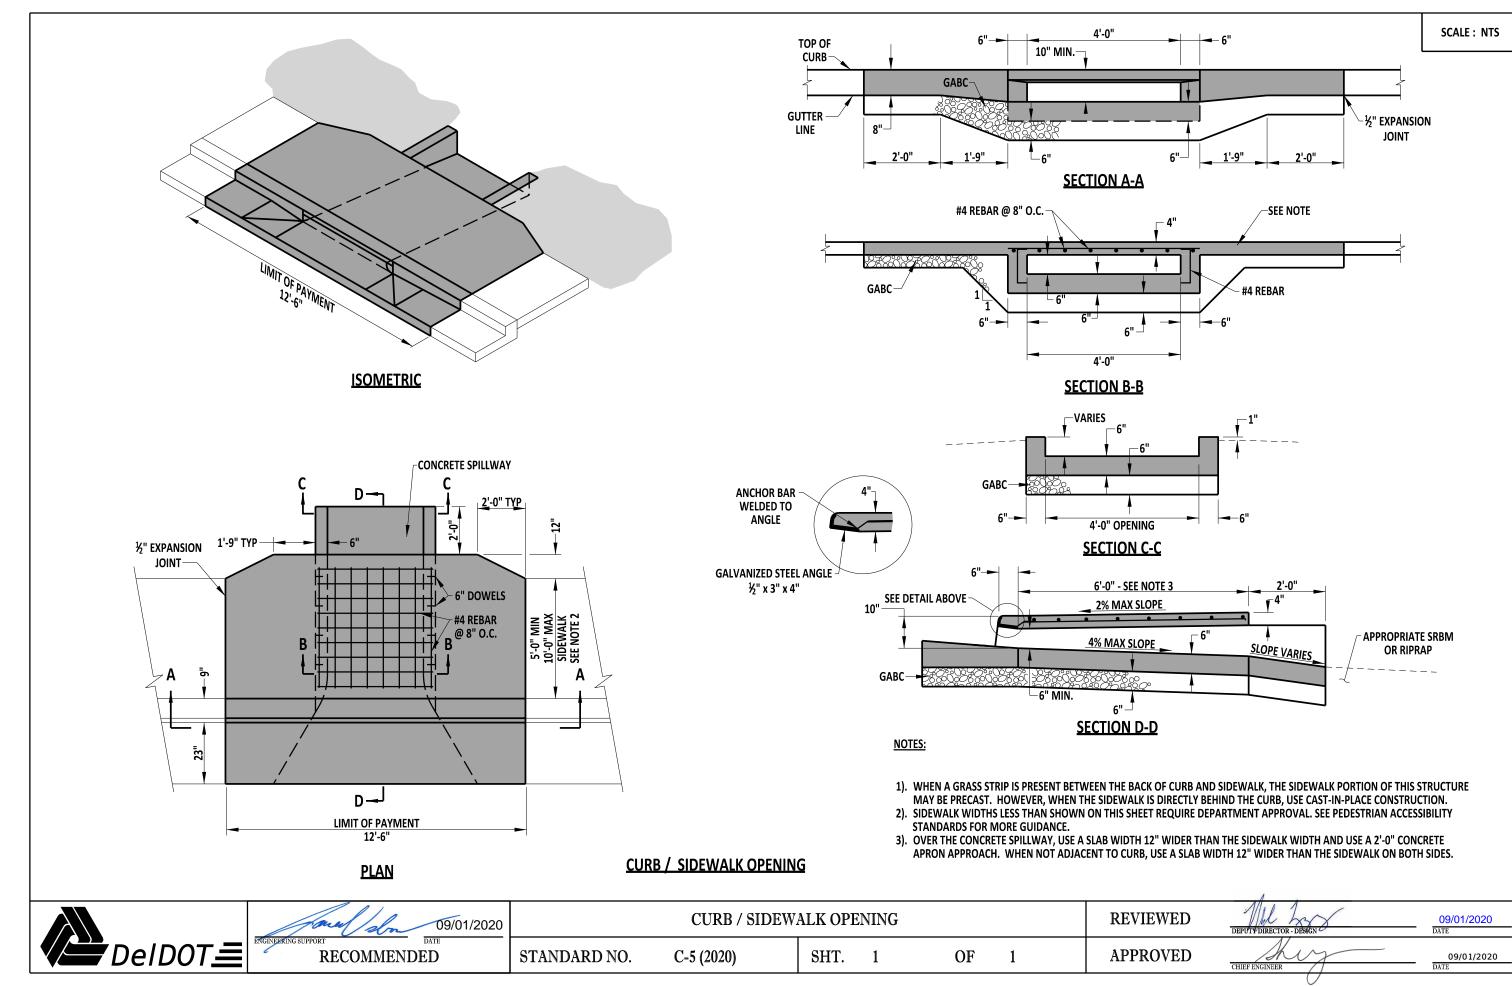


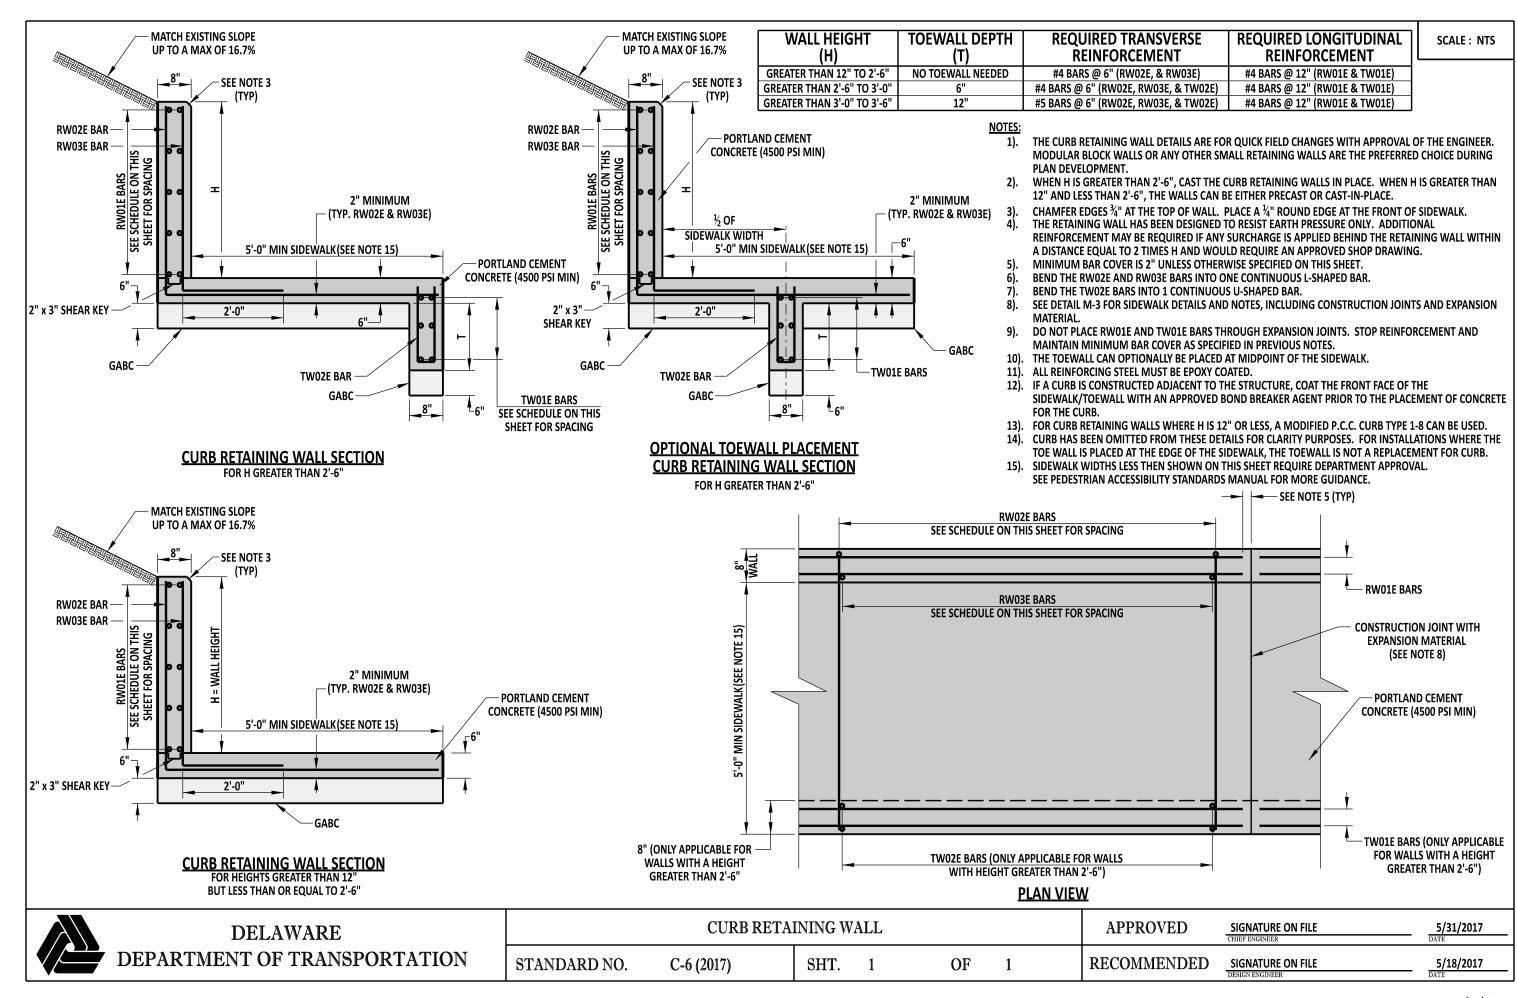

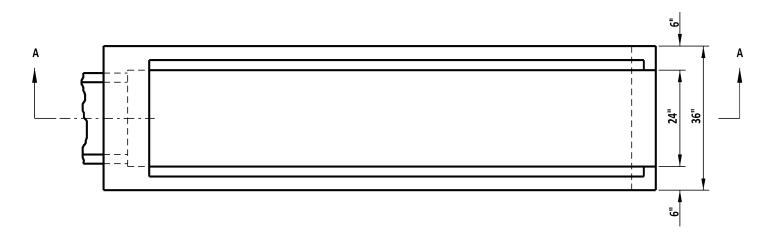

PLAN VIEW
SHOWN WITHOUT GRATE

NOTE: 6:1 SAFETY END STRUCTURE TO BE PRECAST

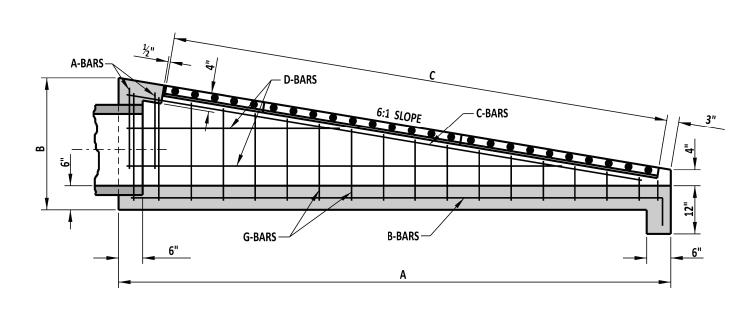

C-BAR

D-BARS

D-BARS

G-BARS

SECTION A-A FRONT VIEW

DELAWARE
DEPARTMENT OF TRANSPORTATION

	6:1 CONCRETE SAFE	TY END S	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	1/04/2019			
STANDARD NO.	D-1 (2018)	SHT.	1	OF	2	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER	12/20/2018 DATE

_									
L	DIMENSIONS								
	PIPE SIZE	Α	В	C					
	15"	9'-6"	2'-5"	8'-4"					
	18"	11'-6"	2'-9"	10'-5"					
Γ	21" OR 24"	14'-4"	3'-25%"	12'-6"					


	APPROXIMATE QUANTITIES											
PIPE SIZE	CONCR	RETE FT ³	REINF. STEEL	NO. OF	LENGTH TO BE	WEIGHT OF FULL SIZE GRATE	WEIGHT OF CUT GRATE					
PIPE 31ZE	CONC. PIPE	C.M. PIPE	LBS.	GRATES	CUT FROM 1 GRATE	LBS.	LBS.					
15"	25	25.43	121.12	2		270.92						
18"	31.5	32.07	156.7	3	2'-1"	270.92	135.47					
21" OR 24"	40.75	39.87	194.0	3		270.92						

	BENDING DIAG	RAM
PIPE SIZE	х	X
15"	9'-2"	
18"	11'-2"	
21" OR 24"	14'-0"	B-BARS
PIPE SIZE	Υ	G-BARS
15"	VARIES 25" TO 4"	
18"	VARIES 29" TO 4"]
21" OR 24"	VARIES 34" TO 4"	32"
	32"	- _
A-BARS		20"

	SCHEDULE OF REINFORCING STEEL																			
A-BARS B-BARS C-BARS D-BARS											G-BARS									
PIPE SIZE	SIZE	NO.	SPA.	LENGTH	SIZE	NO.	SPA.	LENGTH	SIZE	NO.	SPA.	LENGTH	SIZE	NO.	SPA.	LENGTH	SIZE	NO.	SPA.	LENGTH
15"	#4	2	8"	72"	#4	5	8"	9'-9"	#4	2	-	9'-3"	#4	4	8"	VARIES 50" TO 100"	#4	15	8"	VARIES 40" TO 82"
18"	#4	2	8"	72"	#4	5	8"	11'-9"	#4	2	-	11'-5"	#4	6	8"	VARIES 43½" TO 130½"	#4	18	8"	VARIES 40" TO 90"
21" OR 24"	#4	2	8"	72"	#4	5	8"	14'-7"	#4	2	-	14'-3"	#4	6	8"	VARIES 51" TO 153"	#4	22	8"	VARIES 40" TO 100"


DELAWARE
DEPARTMENT OF TRANSPORTATION

	6:1 CONCRETE SAFE	TY END S	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	1/04/2019 DATE				
STANDARD NO.	D-1 (2018)	SHT.	2	OF	2		RECOMMENDED	SIGNATURE ON FILE	12/20/2018

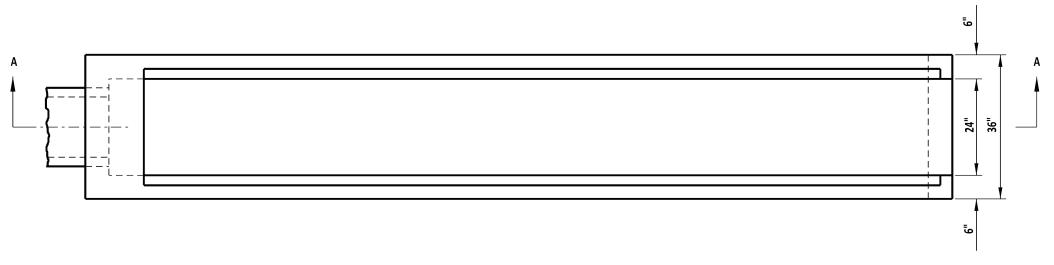

PLAN VIEW SHOWN WITHOUT GRATE

NOTE: 10:1 SAFETY END STRUCTURE TO BE PRECAST

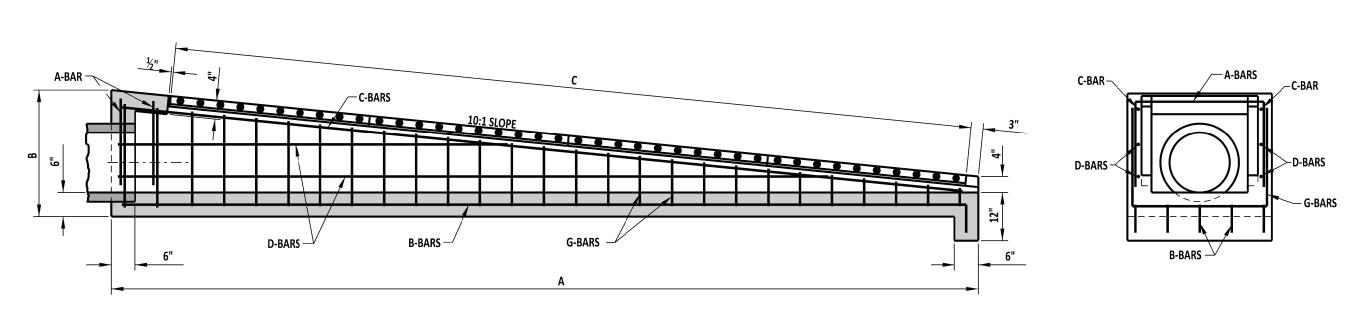

SECTION A-A	FRONT VIEW

DELAWARE		10:1 CONCRETE SAFE	TY END	STRUC	TURE		APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	1/04/2019 DATE
DEPARTMENT OF TRANSPORTATION	STANDARD NO.	D-2 (2018)	SHT.	1	OF	2	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER	12/20/2018 DATE

DIMENSIONS												
PIPE SIZE A B C												
15"	15" 15'-4" 2'-4 ³ %" 14'-7"											
18"												
21" OR 24"	24'-0"	3'-2 ¹³ / ₁₆ "	22'-11"									

	APPROXIMATE QUANTITIES													
PIPE SIZE	PIPE SIZE CONCRETE FT ³ REINF. STEEL NO. OF LENGTH TO BE SIZE GRATE CONTROLL SIZ													
PIPE 31ZE	CONC. PIPE	C.M. PIPE	LBS.	GRATES	CUT FROM 1 GRATE	LBS.	CUT GRATE LBS.							
15"	41.35	41.78	175.0	4	2'-1"	270.92	135.47							
18"	50.11	50.68	227.0	5	2'-1"	270.92	135.47							
21" OR 24"	69.43	70.31	310.4	6	2'-1"	270.92	135.47							


	BENDING DIAG	RAM
PIPE SIZE	х	х
15"	15'-0"	
18"	19'-2"]
21" OR 24"	23'-8"	B-BARS
PIPE SIZE	Υ	G-BARS
15"	VARIES 21½" TO 4"	1 1
18"	VARIES 26 ⁷ / ₁₆ " TO 4"	1
21" OR 24"	VARIES 31¾" TO 4"	32"
	32"	
A-BARS		20"

	SCHEDULE OF REINFORCING STEEL																			
PIPE SIZE	A-BARS B-BARS C-BARS D-BARS								G-BARS											
PIPE SIZE	SIZE	NO.	SPA.	LENGTH	SIZE	NO.	SPA.	LENGTH	SIZE	NO	. SPA.	LENGTH	SIZE	NO.	SPA.	LENGTH	SIZE	NO.	SPA.	LENGTH
15"	#4	2	8"	72"	#4	5	8"	15'-7"	#4	2	-	15'-1½6"	#4	4	8"	VARIES 72 ¹³ / ₁₆ " TO 145%"	#4	24	8"	VARIES 40" TO 75 ¹¹ / ₁₆ "
18"	#4	2	8"	72"	#4	5	8"	19'-9"	#4	2	-	19'-3¾"	#4	4	8"	VARIES 89%" TO 179 ³ / ₁₆ "	#4	30	8"	VARIES 40" TO 85¾"
21" OR 24"	#4	2	8"	72"	#4	5	8"	24'-3"	#4	2	-	23'-95%"	#4	6	8"	VARIES 80¾" TO 242½"	#4	37	8"	VARIES 40" TO 96½6"

DELAWARE
DEPARTMENT OF TRANSPORTATION

	10:1 CONCRETE SAFE	TY END	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	1/04/2019 DATE			
STANDARD NO.	D-2 (2018)	SHT.	2	OF	2	RECOMMENDED	SIGNATURE ON FILE	12/20/2018



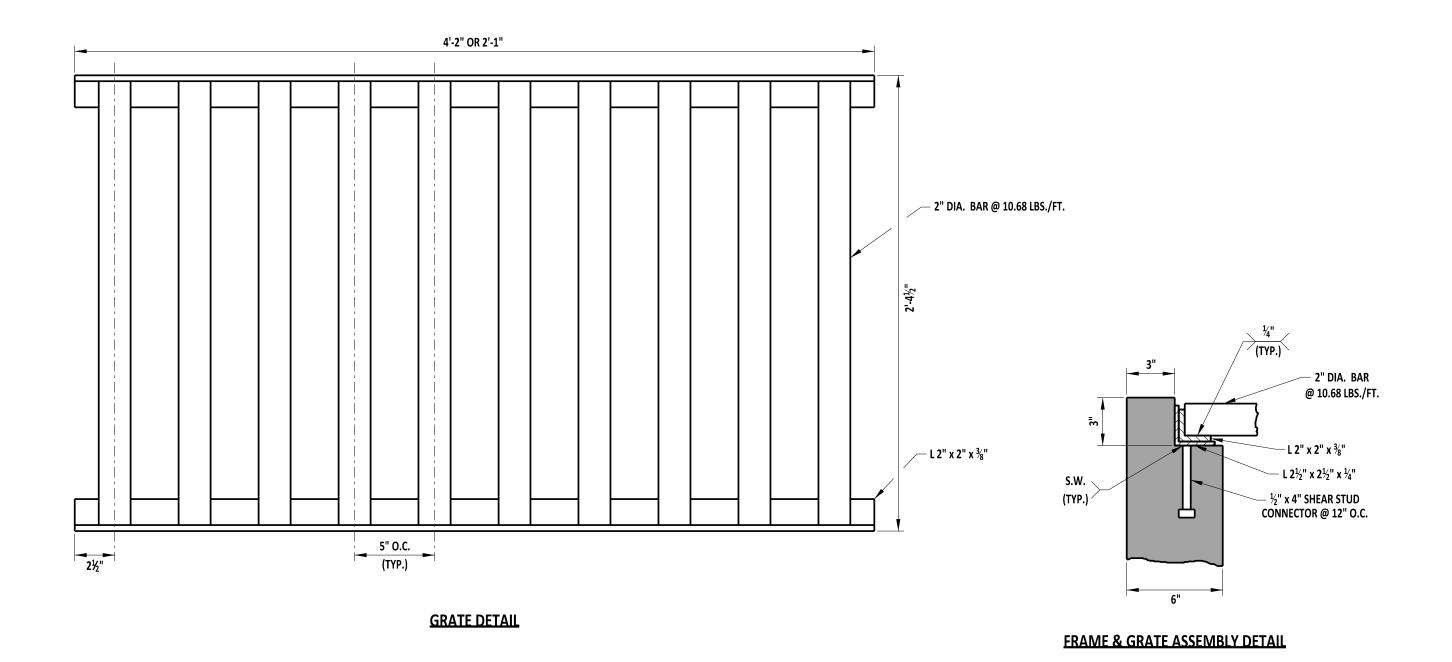



O9/01/2020

RECOMMENDED

SAFETY END STRUCTURE GRATE AND ASSEMBLY


REVIEWED APPROVED

09/01/20 DATE


STANDARD NO. D-3 (2020) SHT. 1

OF 2

HEF ENGINEER

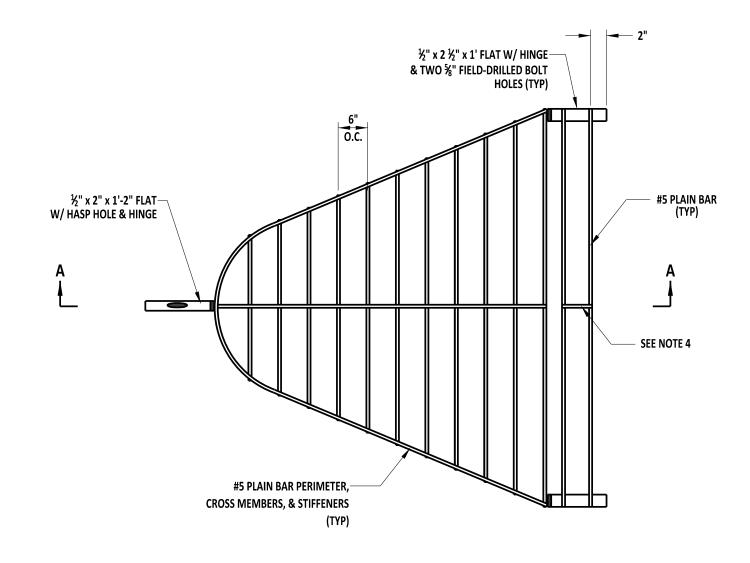


PLAN VIEW

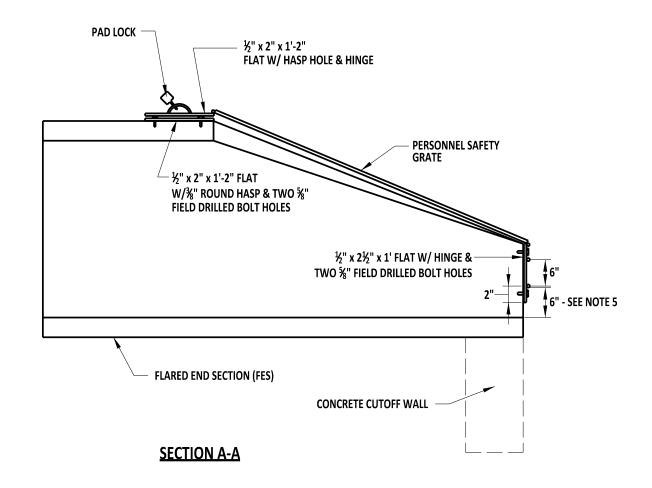

NOTES:


- 1). INSTALL PERSONNEL SAFETY GRATES (PSG) ONLY ON THE INLETS OF STORM WATER PIPES 12" OR LARGER IN DIAMETER THAT ARE NOT STRAIGHT FROM THE INLET TO THE OPEN OUTLET, REGARDLESS OF THE LENGTH.
- 2). FIT THE GRATE TO THE OUTSIDE PERIMETER OF THE FLARED END SECTION (FES) $\pm \frac{1}{2}$ ".
- 3). DRILL ALL BOLT HOLES IN THE FIELD.
- 4). INSTALL A STIFFENER WHERE TWO OR MORE BARS ARE USED.
- 5). PLACE BOTTOM BAR 6" ABOVE INVERT OF FES.
- 6). ATTACH ALL HARDWARE IN CONCRETE USING APPROVED TAMPER PROOF ANCHORS.




INLET BOX SIZE		COVER SLAB SIZE	DRAINAGE INLET	INLET TOP UNIT	INLET TOP UNIT	INLET TOP UNIT	FRAME & GRATE	MAXIMUM PIPE SIZE (SEE NOTE 1)		MAXIMUM HEIGHT
L	w	(L X W)	TOP UNIT	REBAR LENGTH	LIMIT OF PAYMENT	BAR BENDING DIAGRAM	(SEE DETAIL D-5, SHEET 2) SEE NOTE 6	L	w	OF GRATE)
17%"	11%"	NO COVER SLAB	TYPE 5 (FRAME & GRATE COMBO)	N/A	N/A	N/A	TYPE 5 (FRAME & GRATE COMBO)	N/A	N/A	4'-0"
24"	24"	NO COVER SLAB	TYPE 6 (FRAME & GRATE COMBO)	N/A	N/A	N/A	TYPE 6 (FRAME & GRATE COMBO)	15"	15"	4'-0"
34"	18"	NO COVER SLAB (D-5, SHEET 7)	TYPES A, C, D, & E (D-5, SHEET 7)	79"	82"	S504 (D-5, SHEET 7)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	24"	N/A	4'-0"
34"	24"	NO COVER SLAB (D-5, SHEET 6)	TYPES A, B, C, D, E, & S (SEE NOTE 4)	79"	82"	S501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	24"	15"	11'-4"
48"	30"	60" x 42" (D-5, SHEET 4)	TYPES A, B, C, D, E & S (SEE NOTE 5)	93"	96"	\$501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	36"	21"	11'-4"
48"	48"	60" x 60" (D-5, SHEET 4)	TYPES A, B, C, D, E & S (SEE NOTE 5)	93"	96"	S501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	36"	36"	11'-4"
66"	30"	78" x 42" (D-4, SHEET 4)	TYPES A, B, C, D, E & S (SEE NOTE 5)	111"	114"	S501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	48"	21"	11'-4"
66"	48"	78" x 60" (D-5, SHEET 4)	TYPES A, B, C, D, E & S (SEE NOTE 5)	111"	114"	S501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	48"	36"	11'-4"
66"	66"	78" x 78" (D-5, SHEET 4)	TYPES A, B, C, D, E & S (SEE NOTE 5)	111"	114"	S501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	48"	48"	11'-4"
72"	24"	84" x 36" (D-5, SHEET 5)	TYPES A, B, C, D, E & S (SEE NOTE 5)	117"	120"	\$501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	54"	15"	11'-4"
72"	48"	84" x 60" (D-5, SHEET 5)	TYPES A, B, C, D, E & S (SEE NOTE 5)	117"	120"	\$501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	54"	36"	11'-4"
72"	72"	84" x 84" (D-5, SHEET 5)	TYPES A, B, C, D, E & S (SEE NOTE 5)	117"	120"	S501 (SEE NOTE 5)	TYPES 1 THRU 4 AND 7 GRATE STANDARD DRAINAGE INLET FRAME	54"	54"	11'-4"

NOTES:

- 1). MAXIMUM PIPE SIZES ARE CALCULATED USING REINFORCED CONCRETE PIPE PERPENDICULAR TO THE BOX WALL. FOR OTHER PIPE SIZES, TYPES AND SKEW ANGLES OTHER THAN PERPENDICULAR, SEE CHART ON DELDOT DESIGN RESOURCE CENTER. THESE PIPE SIZES ARE NOT APPLICABLE FOR DOGHOUSE BOX INLET SHOWN ON DETAIL D-5, SHEET 9. STEPS ARE REQUIRED ON ALL DRAINAGE INLETS WHOSE DEPTH IS 4'-0" OR GREATER.
- SEE D-4 OR APPROPRIATE DETAIL SHEET FOR ADDITIONAL NOTES.
- FOR A 34" X 24" DRAINAGE INLET, SEE D-5, SHEET 6 FOR INLET TOP UNIT TYPES A, B, C, D, & E. FOR INLET TOP UNIT TYPE S, SEE D-5, SHEET 8.
- FOR MORE INFORMATION ON DRAINAGE INLET TOP UNIT TYPES A, B, C, D, & E SEE D-5, SHEET 3 AND FOR DRAINAGE INLET TOP UNIT, TYPE S, SEE D-5, SHEET 8.
- ONLY USE THE TYPE 7 DRAINAGE INLET GRATE WHEN SPECIFIED ON THE PLANS OR WITH APPROVAL OF THE ENGINEER.




SCALE: NTS

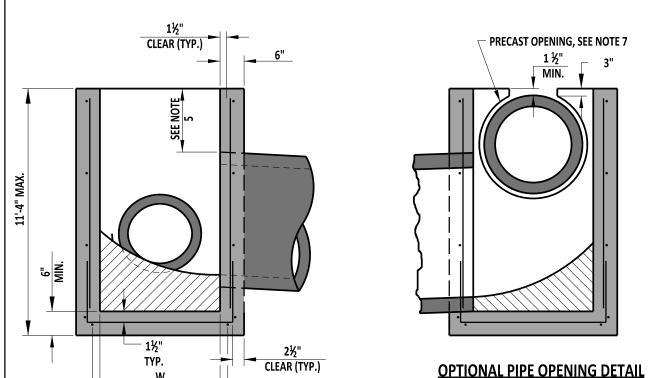


	INLET BO	X SCHEDULE	
L	w	FABRICATION TOLERANCE	
17%"	11%"	+1"	
24"	24"	+1"	
34"	18"	-1"	
34"	24"	-1"	
48"	30"	+6"	
48"	48"	+6"	
66"	30"	+6"	
66"	48"	+6"	
66"	66"	+6"	
72"	24"	-1"	
72"	48"	-1"	
72"	72"	-1"	

- * THESE SIZES ARE TO BE USED FOR LAWN INLETS AND ARE NOT INTENDED TO BE USED IN THE TRAVELWAY. THE MAX DEPTH FOR THESE INLETS IS 4'. SEE NOTE 8 FOR REINFORCEMENT.
- ** MAX DEPTH IS 4' FOR THIS DRAINAGE INLET.

WALL REINFORCEMENT SCHEDULE								
INTERIOR WALL DIMENSION	AREA OF HORIZONTAL REINFORCEMENT PER FOOT	AREA OF VERTICAL REINFORCEMENT PER FOOT						
	IN ²	IN ²						
LESS THAN 4'	0.132	0.132						
≥ 4'	0.163	0.132						
≥ 4.5'	0.198	0.132						
≥ 5'	0.239	0.132						
≥ 5.5'	0.284	0.132						




INLET BOX DETAIL



17 %" X 11 %" LAWN INLET BOX DETAIL

NOTES:

- 1). PROVIDE PRECAST OR CAST-IN-PLACE INLET BOXES IN ACCORDANCE WITH SECTION 602 .
- 2). DO NOT INSTALL PIPES THROUGH ANY CORNER OF THE INLET BOX.
- 3). RISER SECTIONS MAY BE USED FOR DEEP INLET BOXES.
- 4). PIPES MAY BE INSTALLED NEAR OR THROUGH JOINTS FOR RISER SECTIONS.
- 5). WHEN THE COVER ABOVE THE PIPE IS LESS THAN 4" TO THE COVER SLAB OR TOP UNIT OPENING, THE PORTION OF BOX WALL ABOVE THE PIPE MAY BE REMOVED AS SHOWN IN THE OPTIONAL PIPE OPENING DETAIL. FORM AND FILL THE AREA ABOVE THE PIPE WITH HIGH-STRENGTH, NON-SHRINK GROUT MIXED WITH COARSE AGGREGATE IN A 1:1 RATIO BY WEIGHT.
- 6). ENSURE POSITIVE FLOW WHEN CONSTRUCTING THE FLOW CHANNEL.
- 7). WHEN INLET BOX IS PRECAST, PROVIDE A PIPE OPENING DIAMETER BETWEEN 3" AND 4" LARGER THAN OUTSIDE DIAMETER OF PIPE.
- 8). USE 4" X 4", W4 X W4 WELDED WIRE AS REINFORCEMENT FOR LAWN INLET BOXES.
- 9). EXTEND PIPE TO BE FLUSH WITH THE INSIDE WALL OF THE INLET BOX IN ACCORDANCE WITH SECTION 602.3.B OF THE STANDARD SPECIFICATIONS.
- 10). PIPE SHALL NOT ENCROACH ON ADJACENT WALL.
- 11).INSTALL STEPS IN ACCORDANCE WITH SECTION 602.3.B WHEN INLETS ARE 4' OR DEEPER FROM THE TOP OF GRATE TO THE INVERT OF THE LOWEST PIPE.

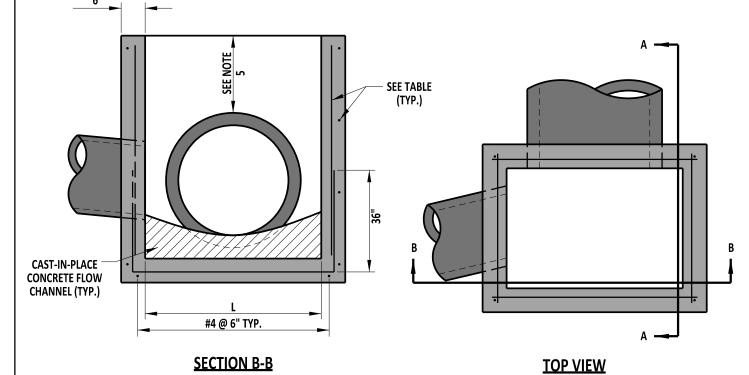

SEE NOTE 5

DelDOT_

#4 @ 6" TYP.

SECTION A-A

INLET BOX

REVIEWED

O9/01/2020

DATE

RECOMMENDED

STANDARD NO. D-4 (2020)

SHT. 1 OF 1 APPROVED


CHIEF ENGINEER


O9/01/2020


DATE


O9/01/2020


DATE

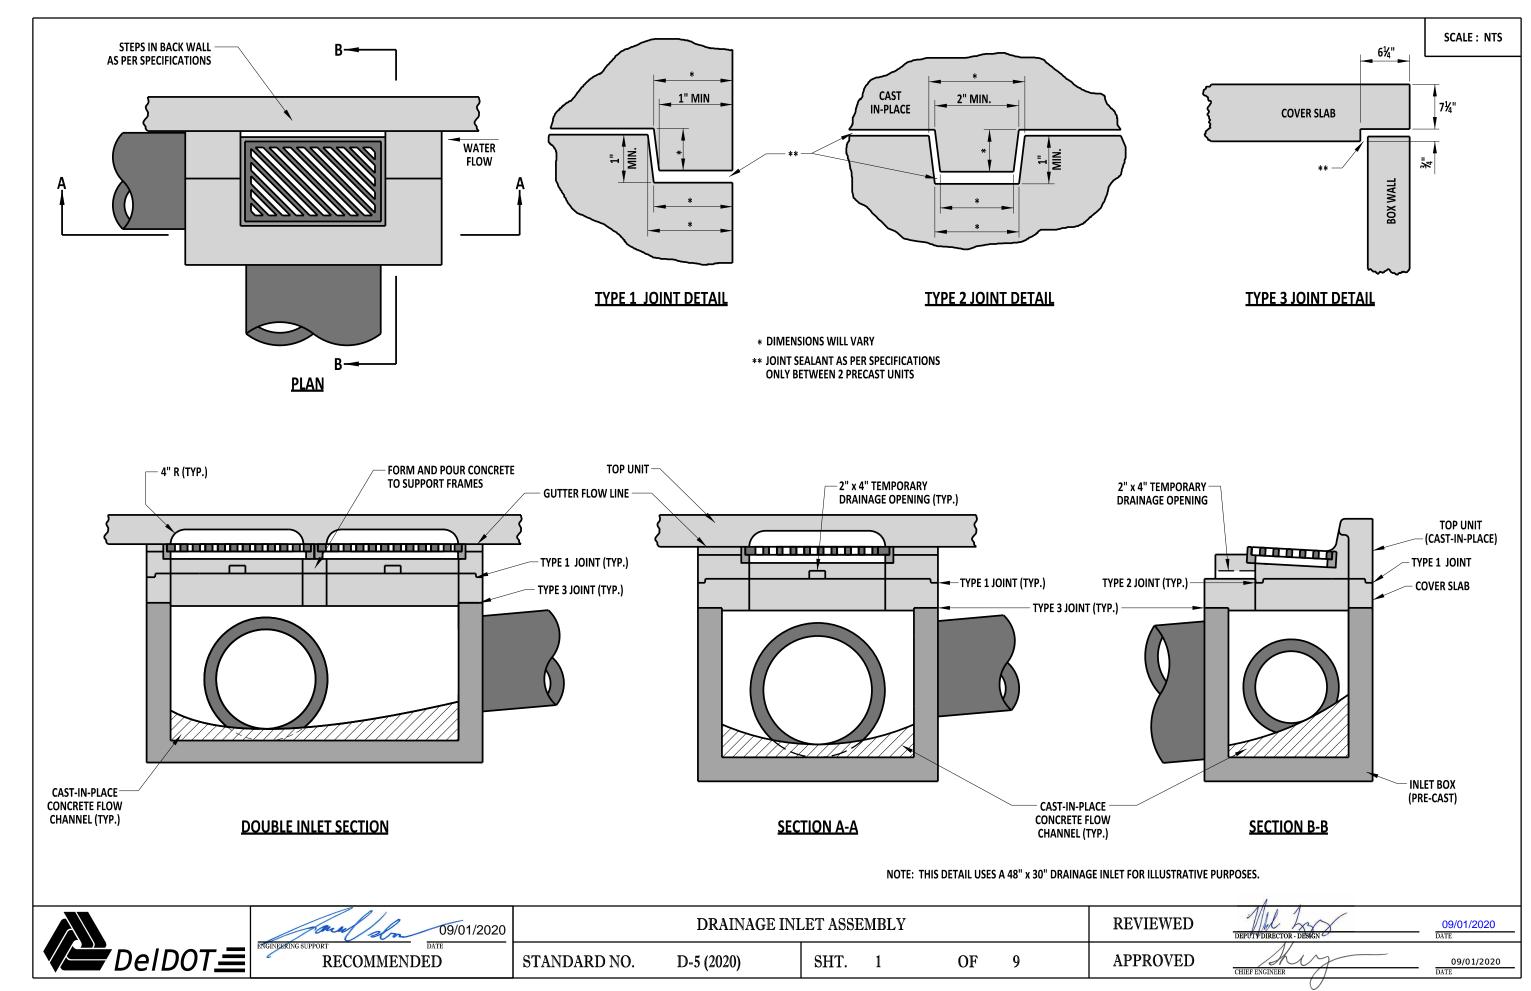


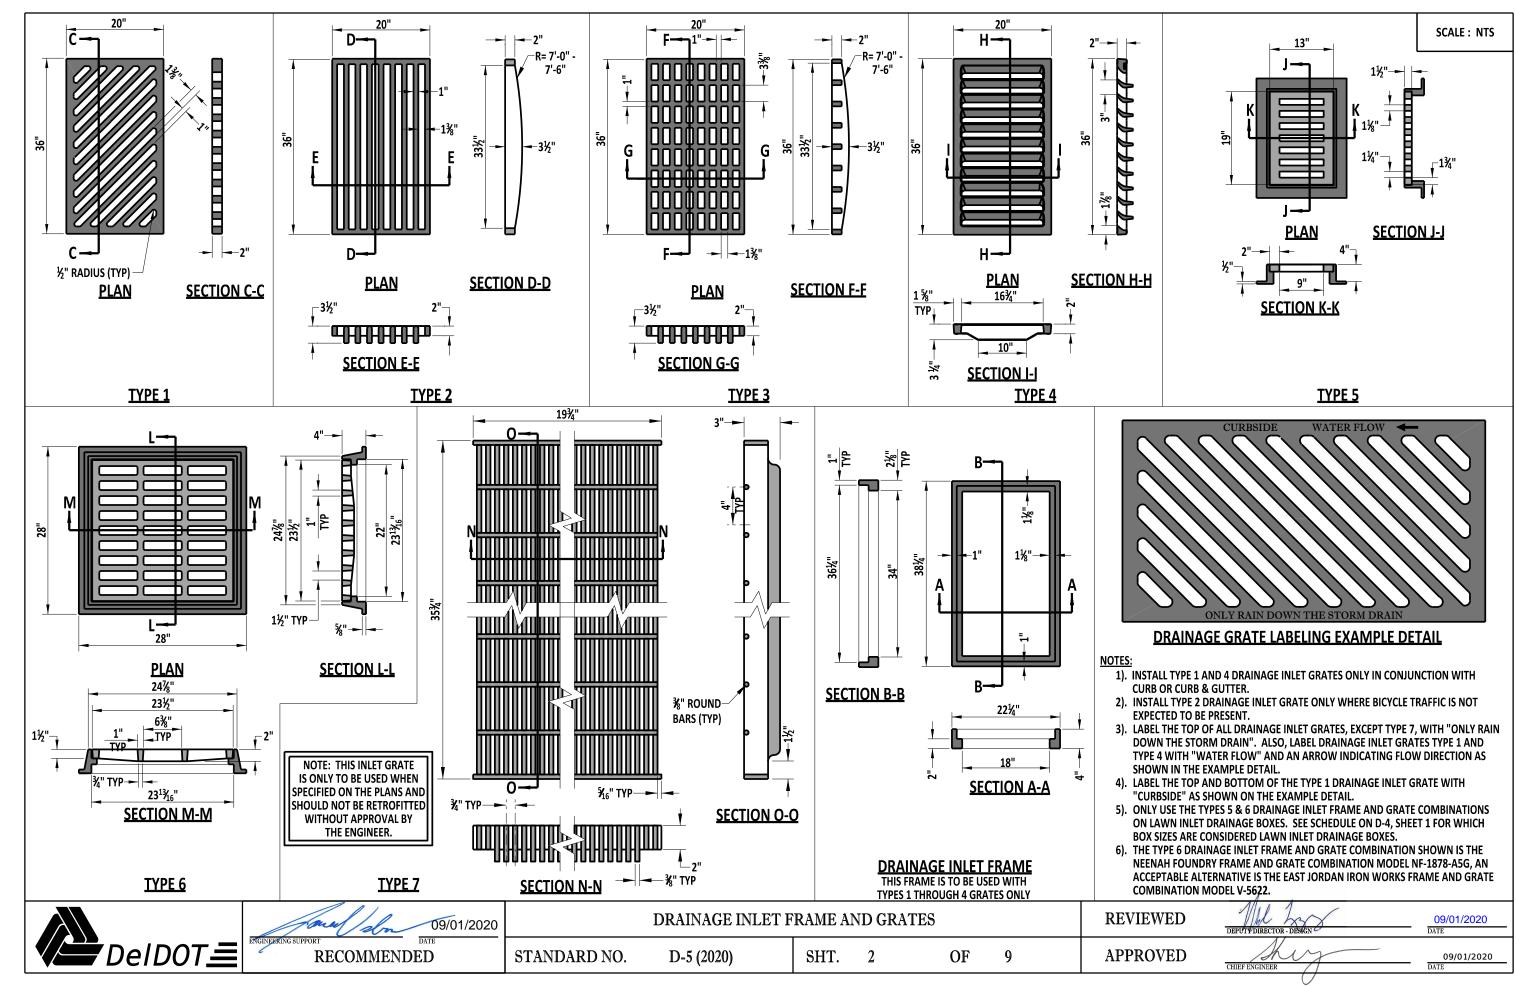


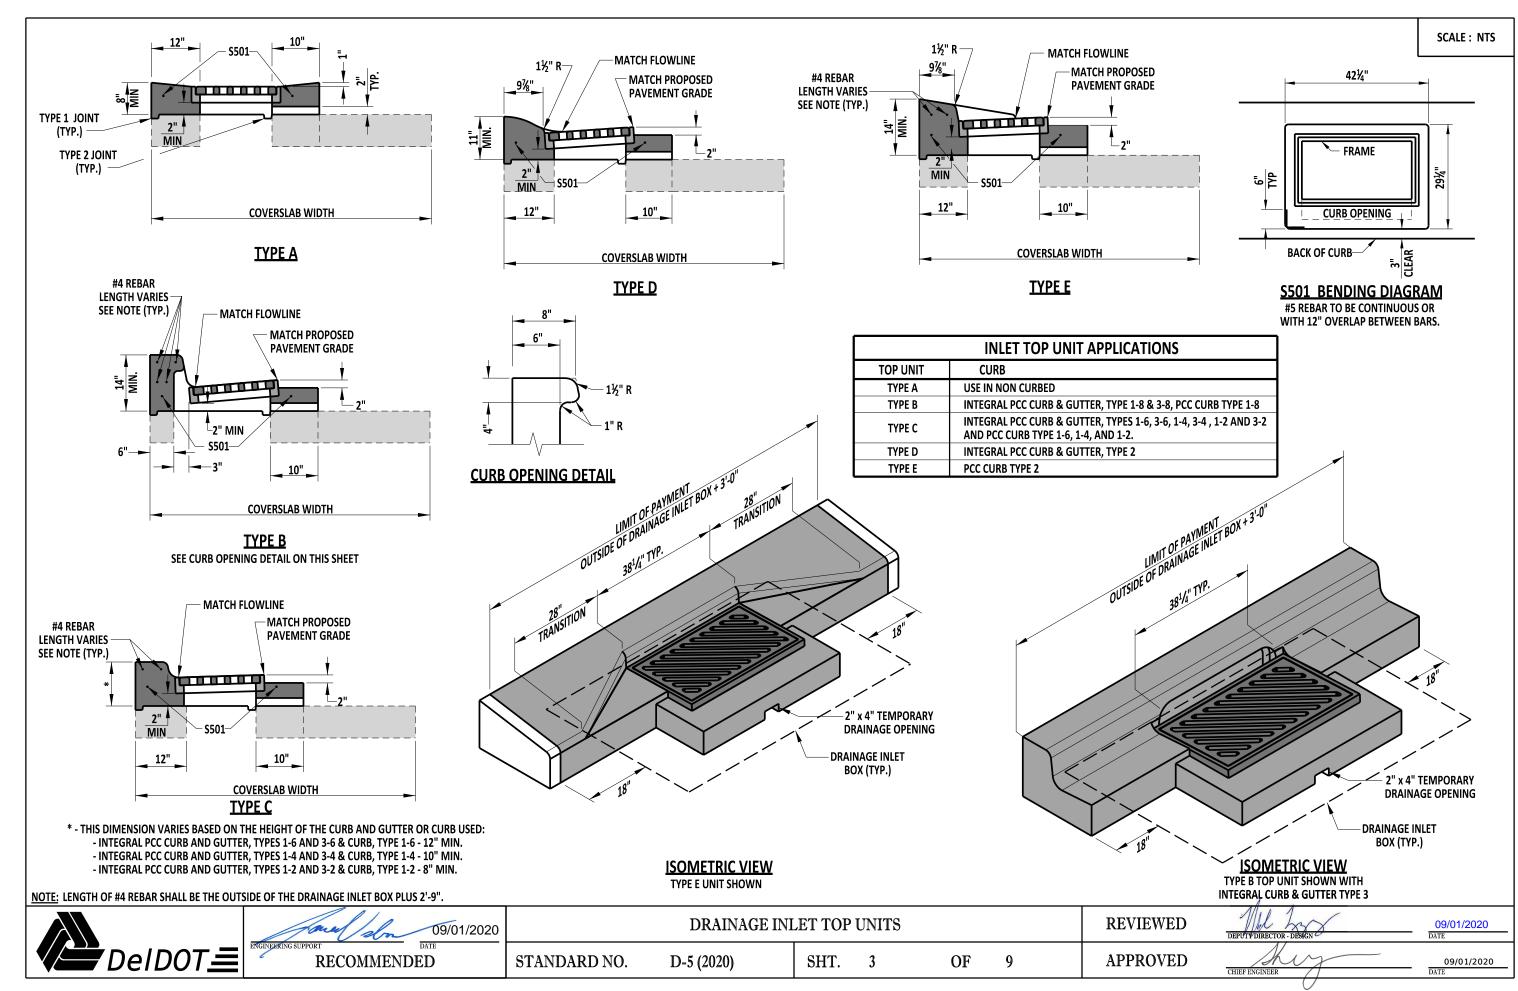


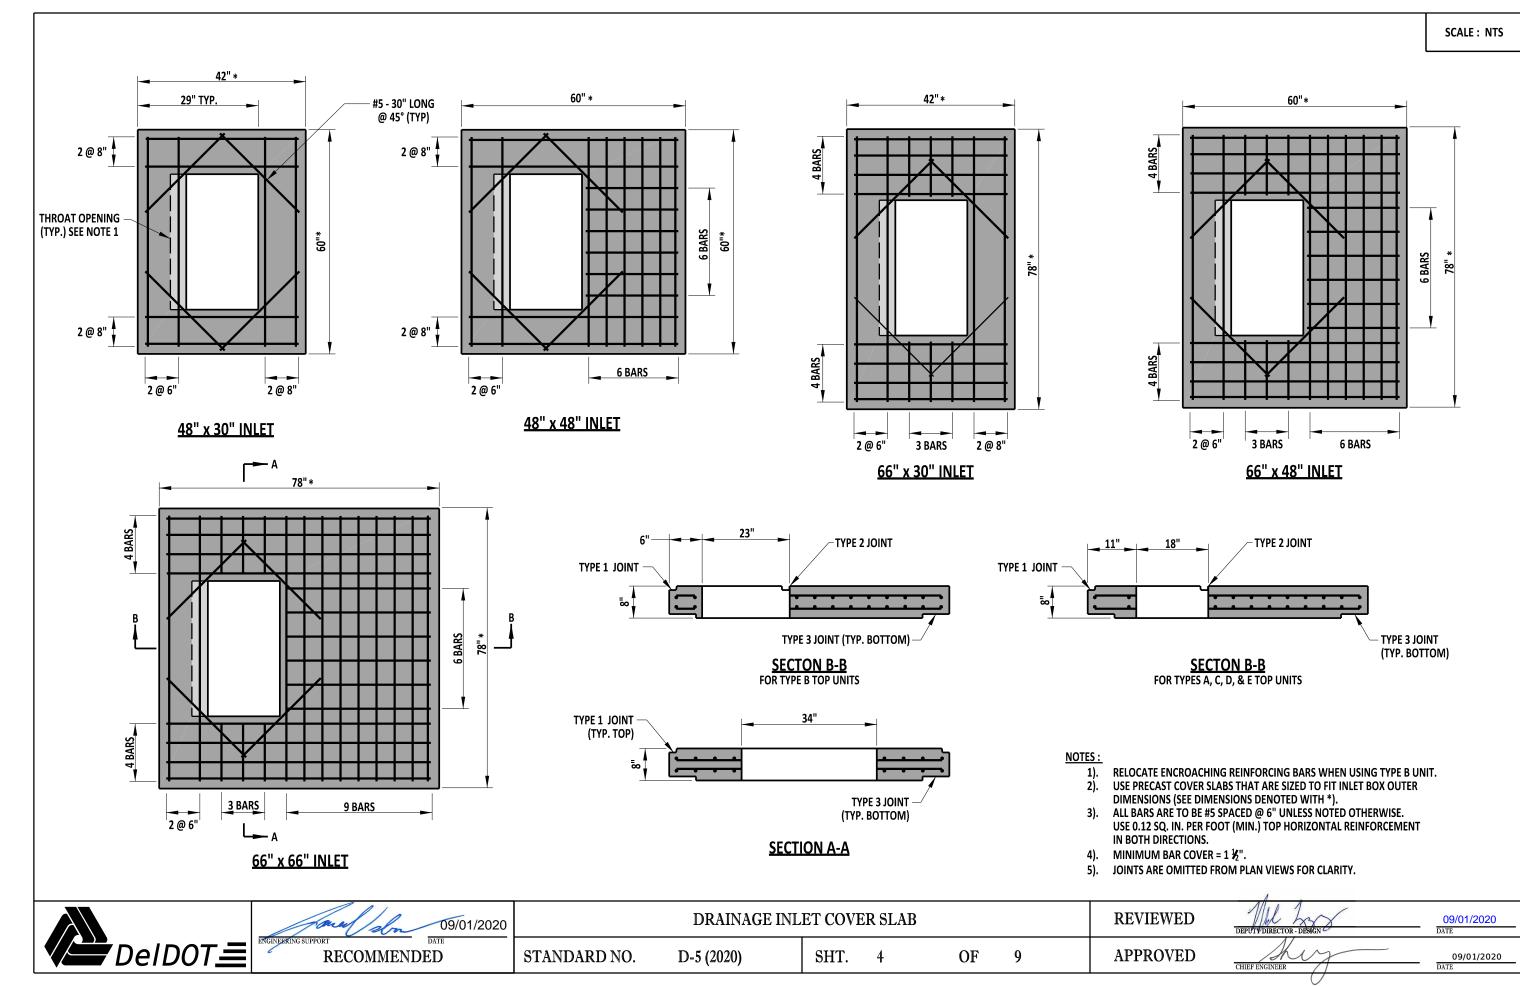


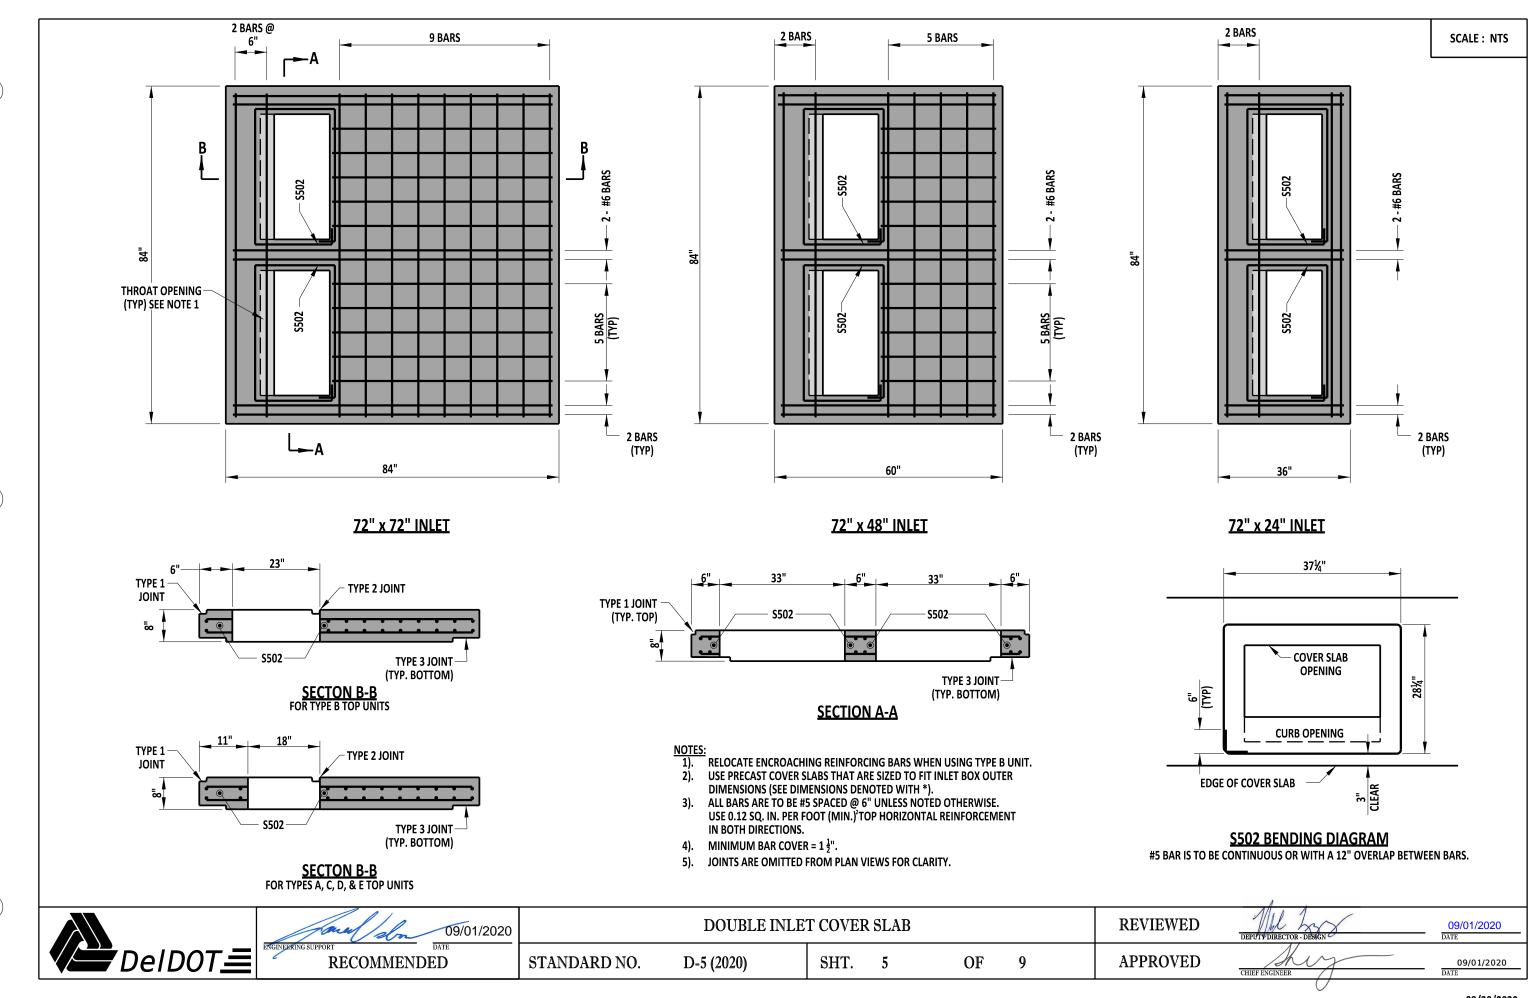


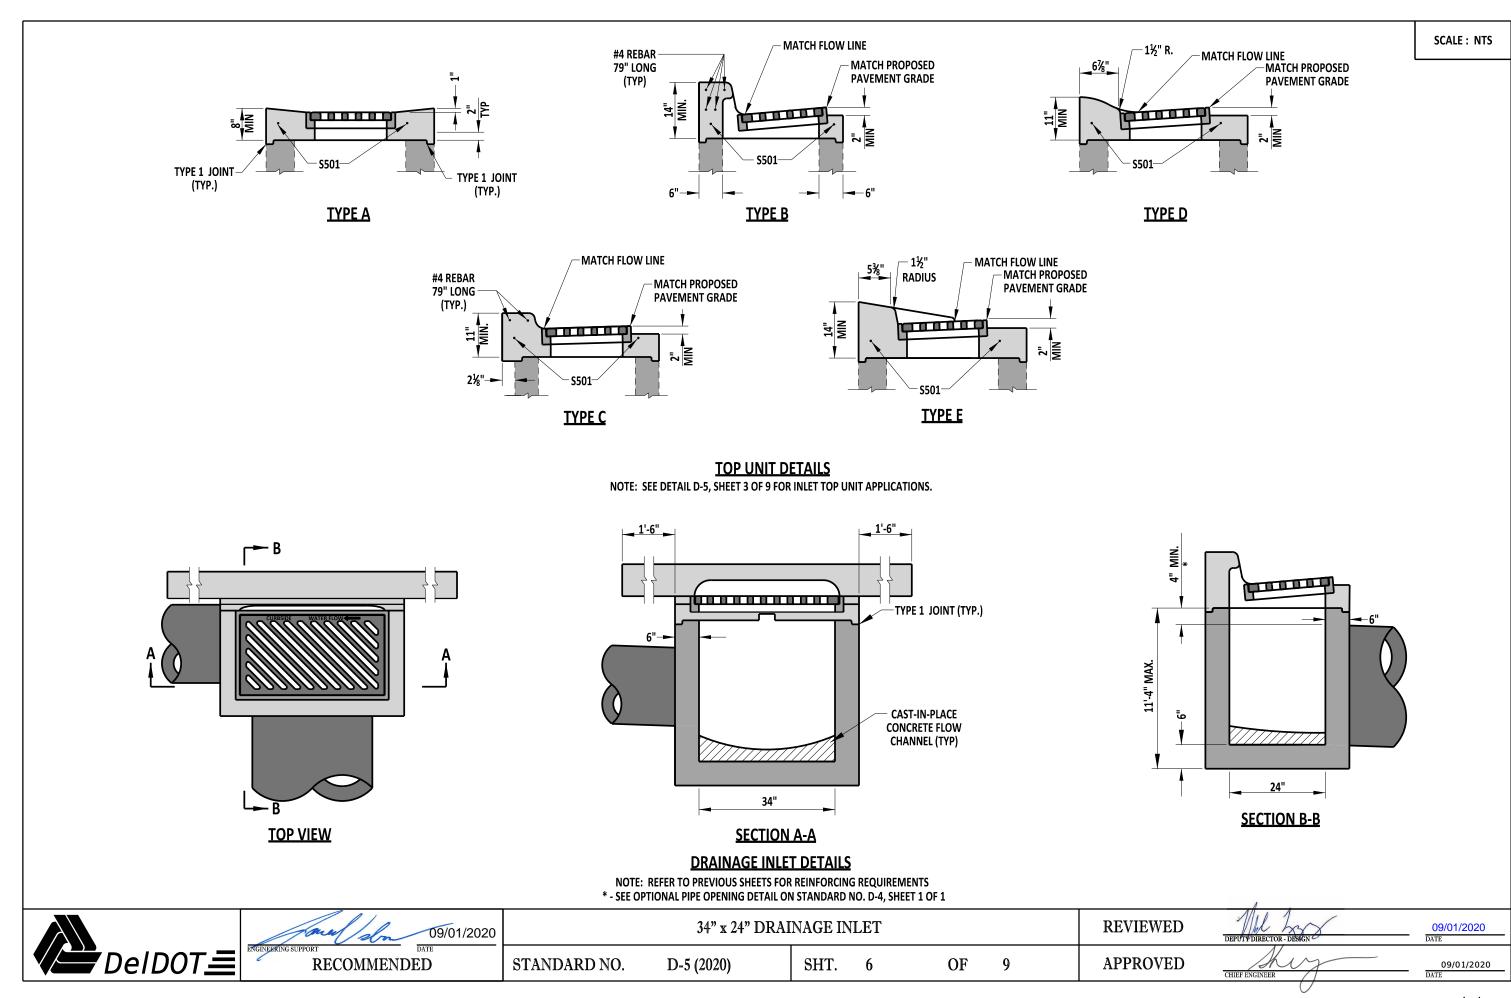

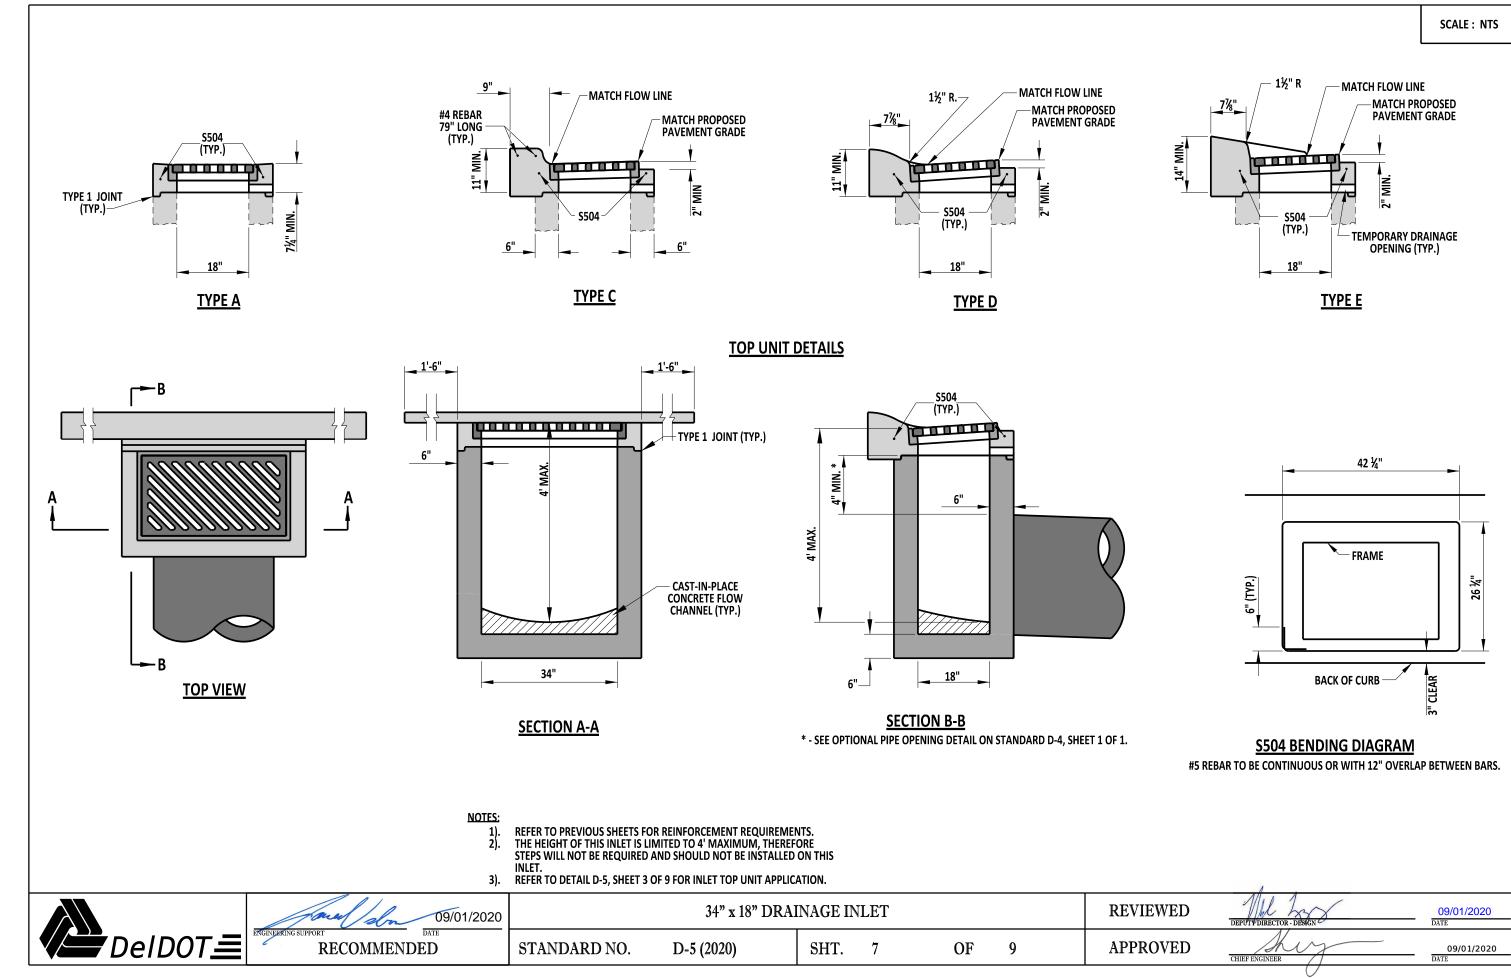


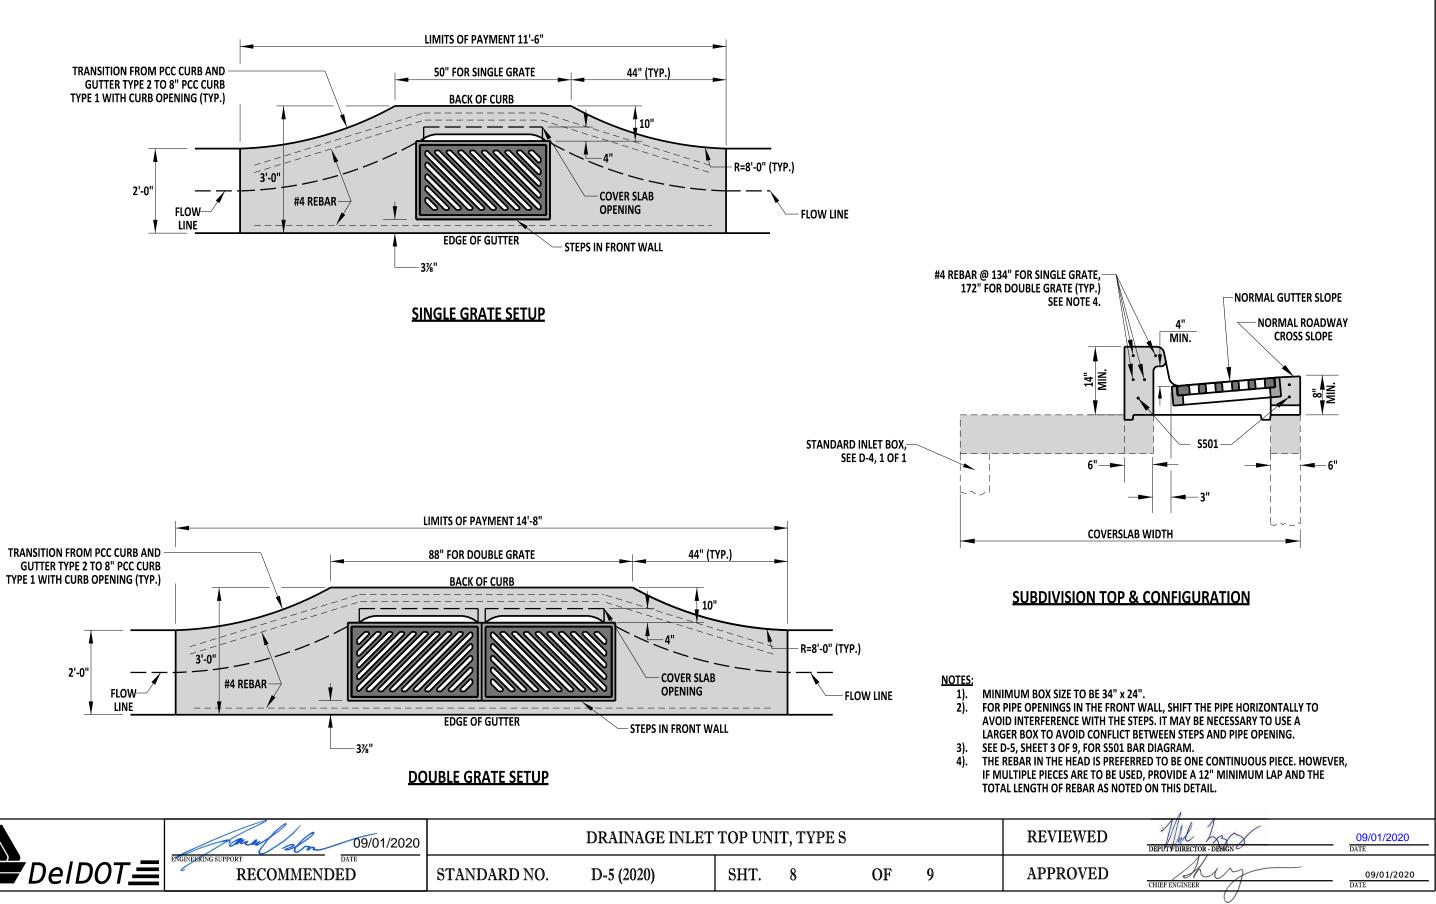


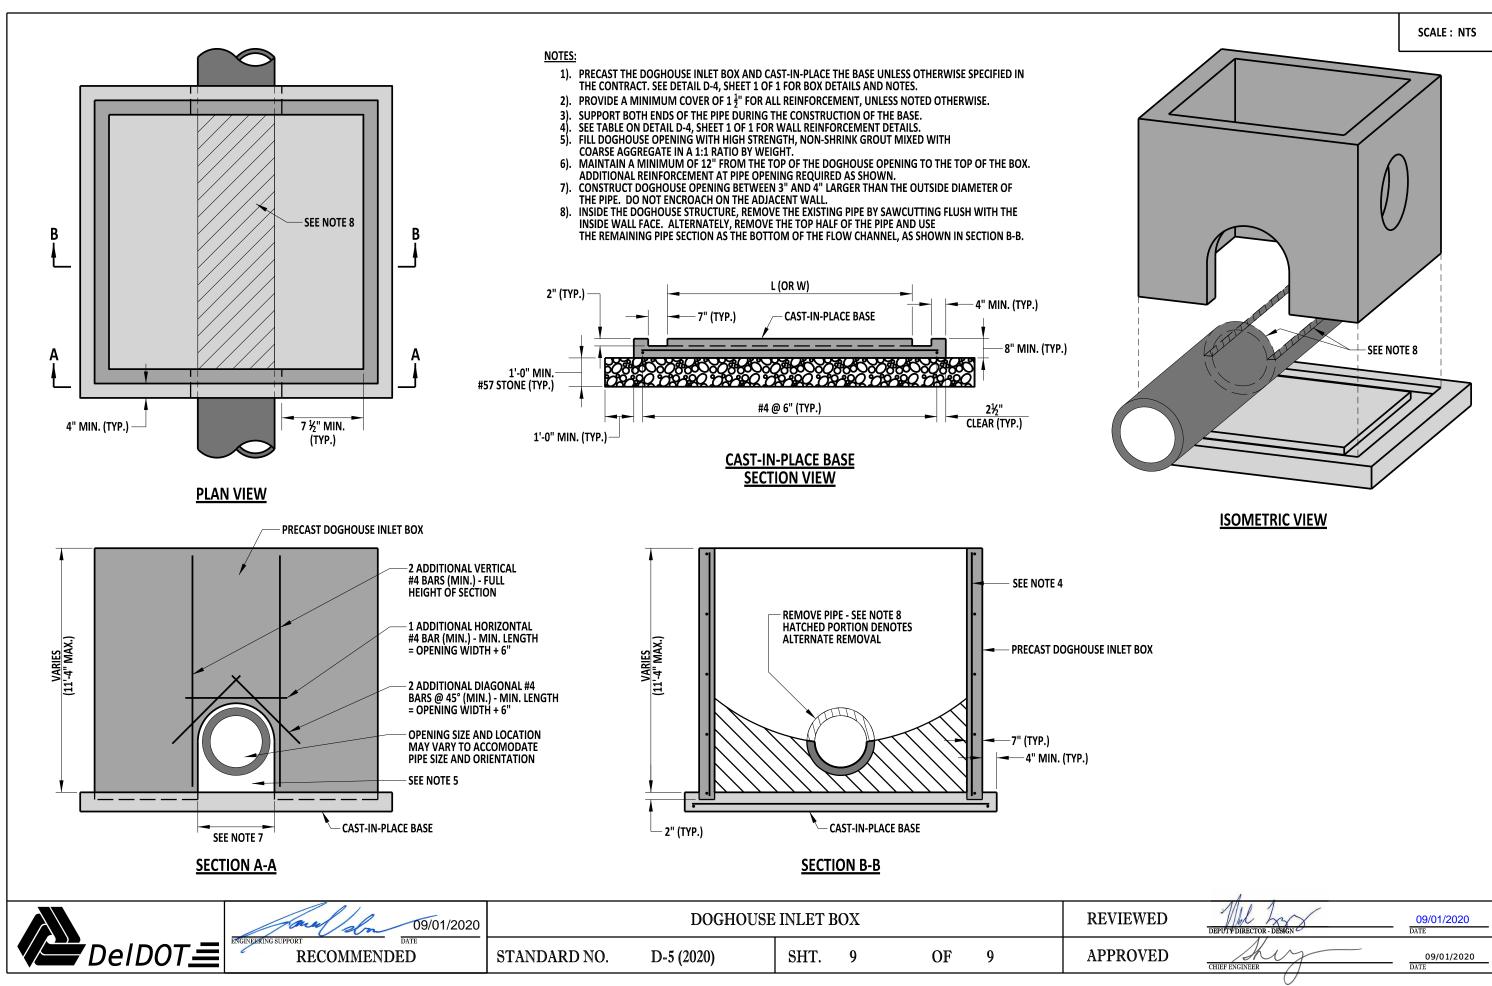


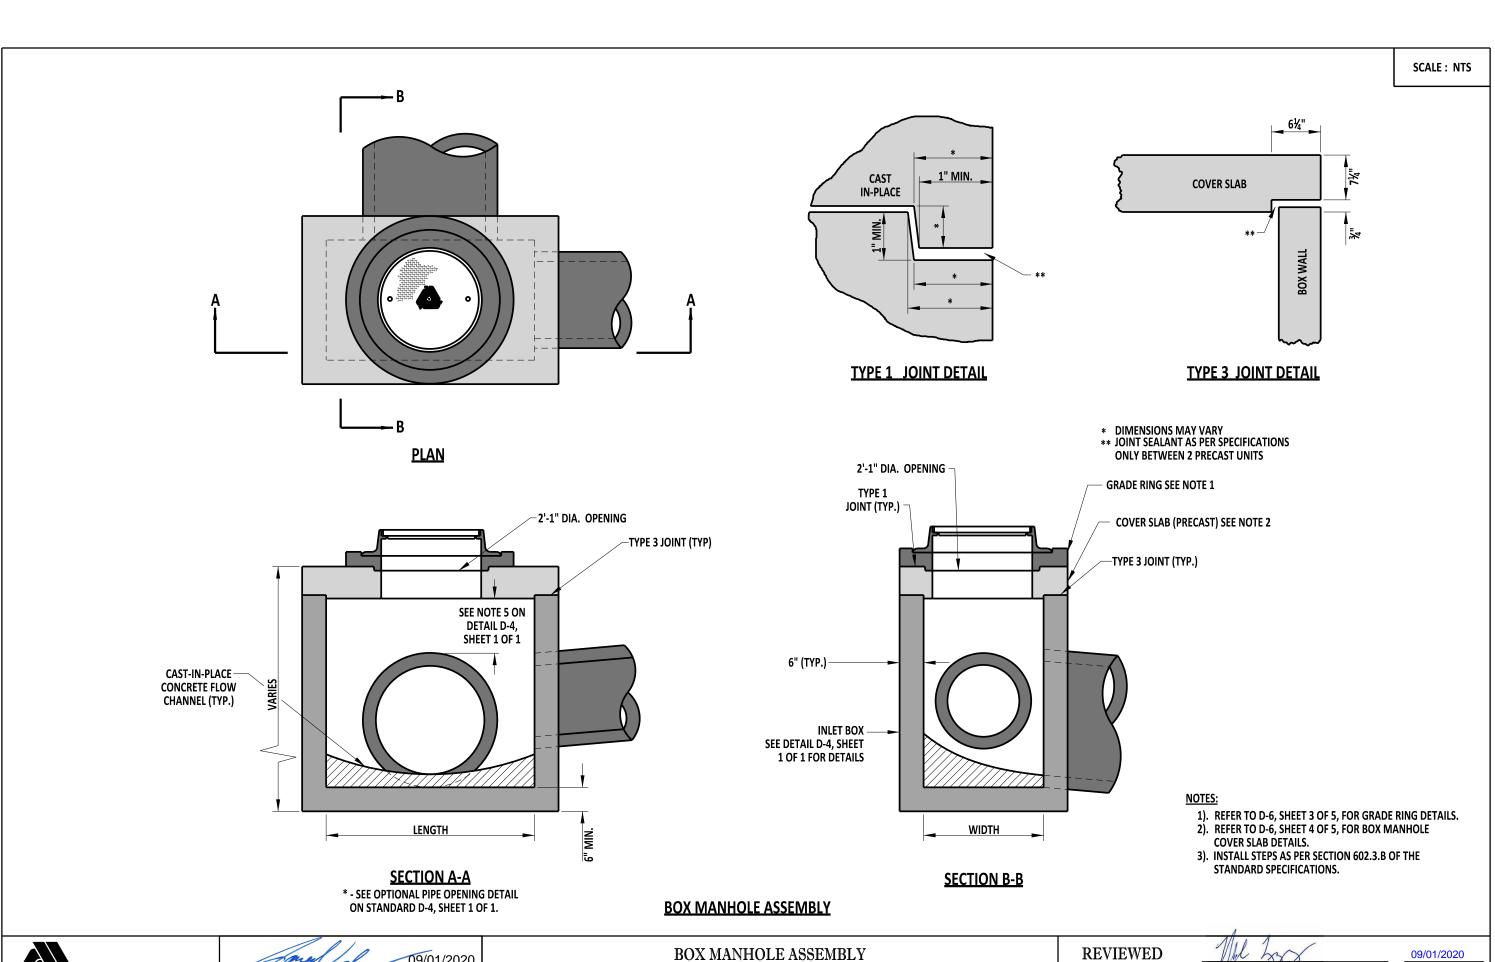



DeIDOT RECOMMENDED STANDARD NO. D-6 (2020) SHT. 1 OF 5 APPROVED O9/01/2020 D09/01/2020 D09

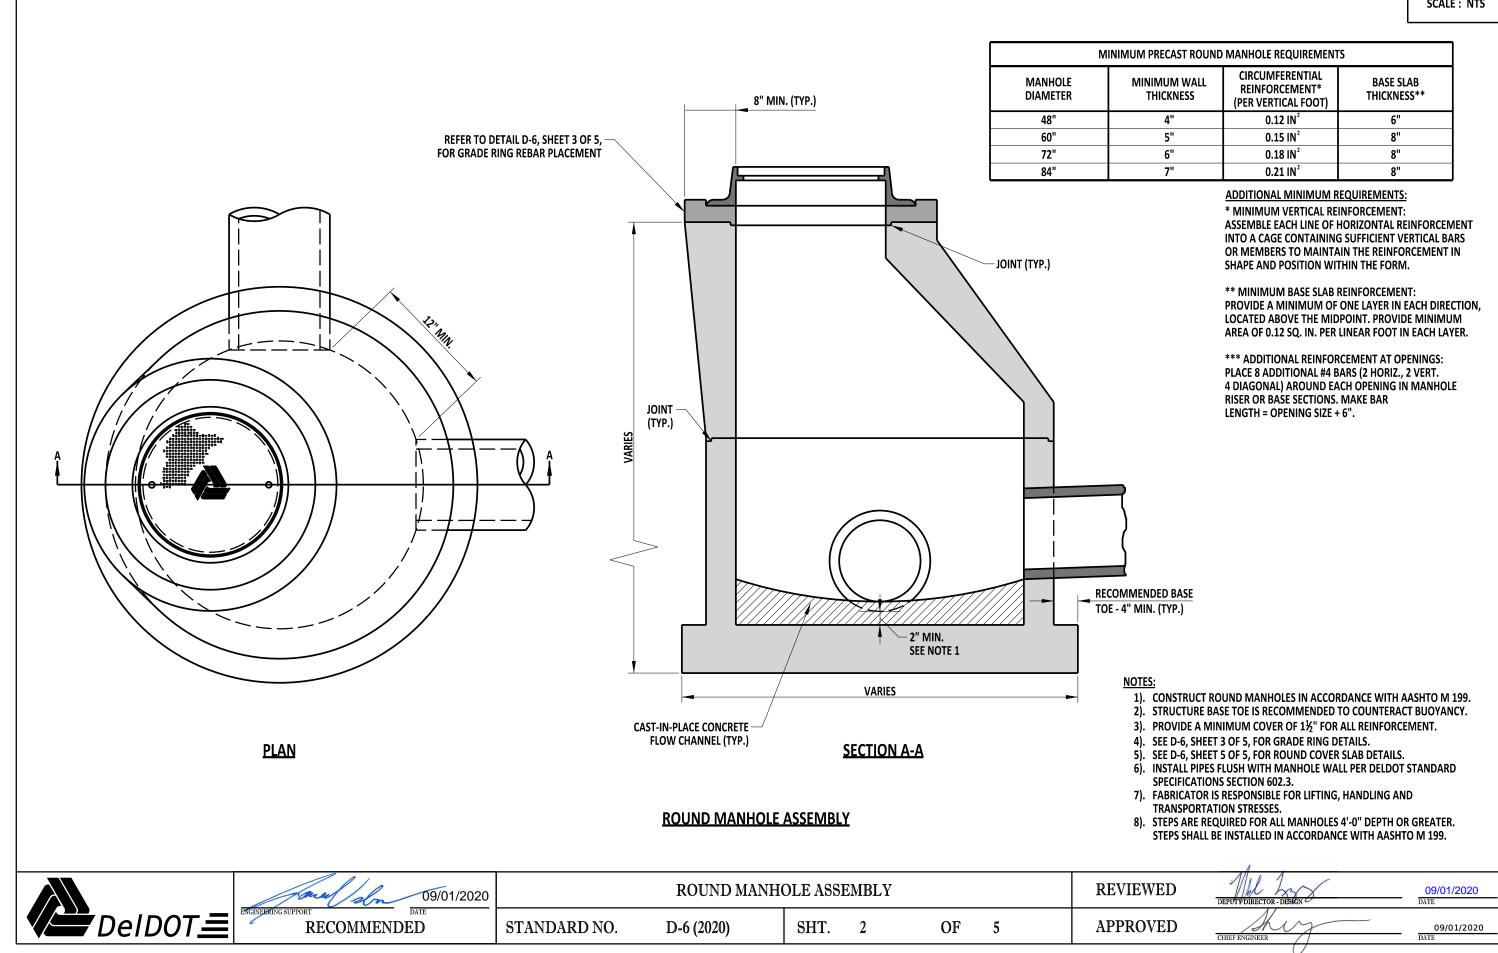


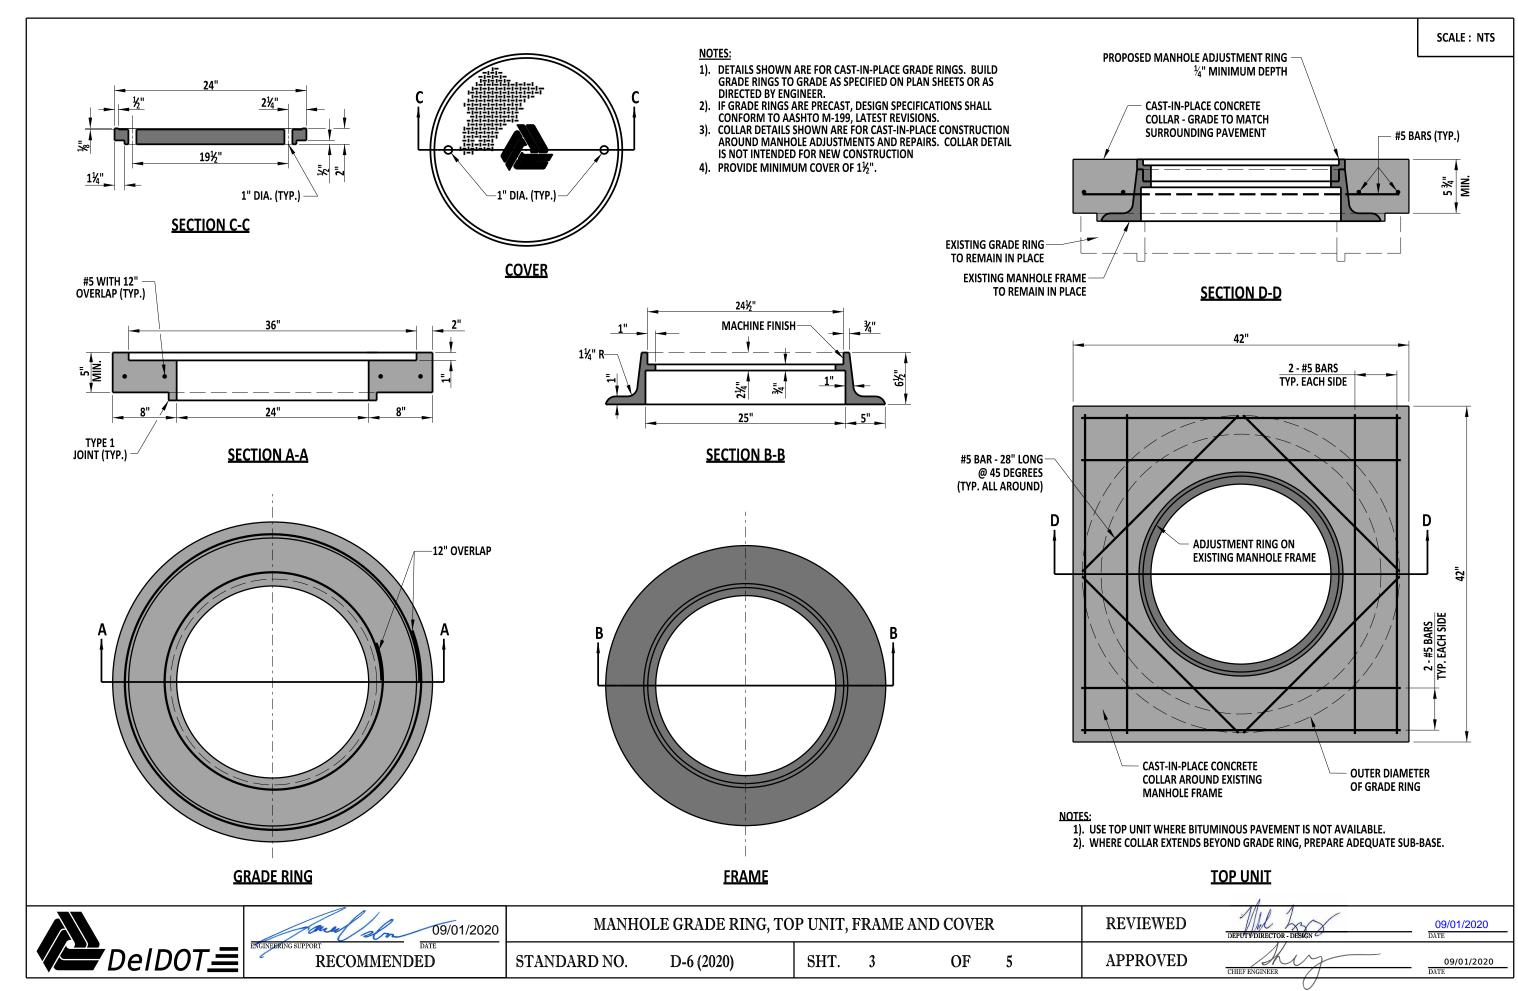

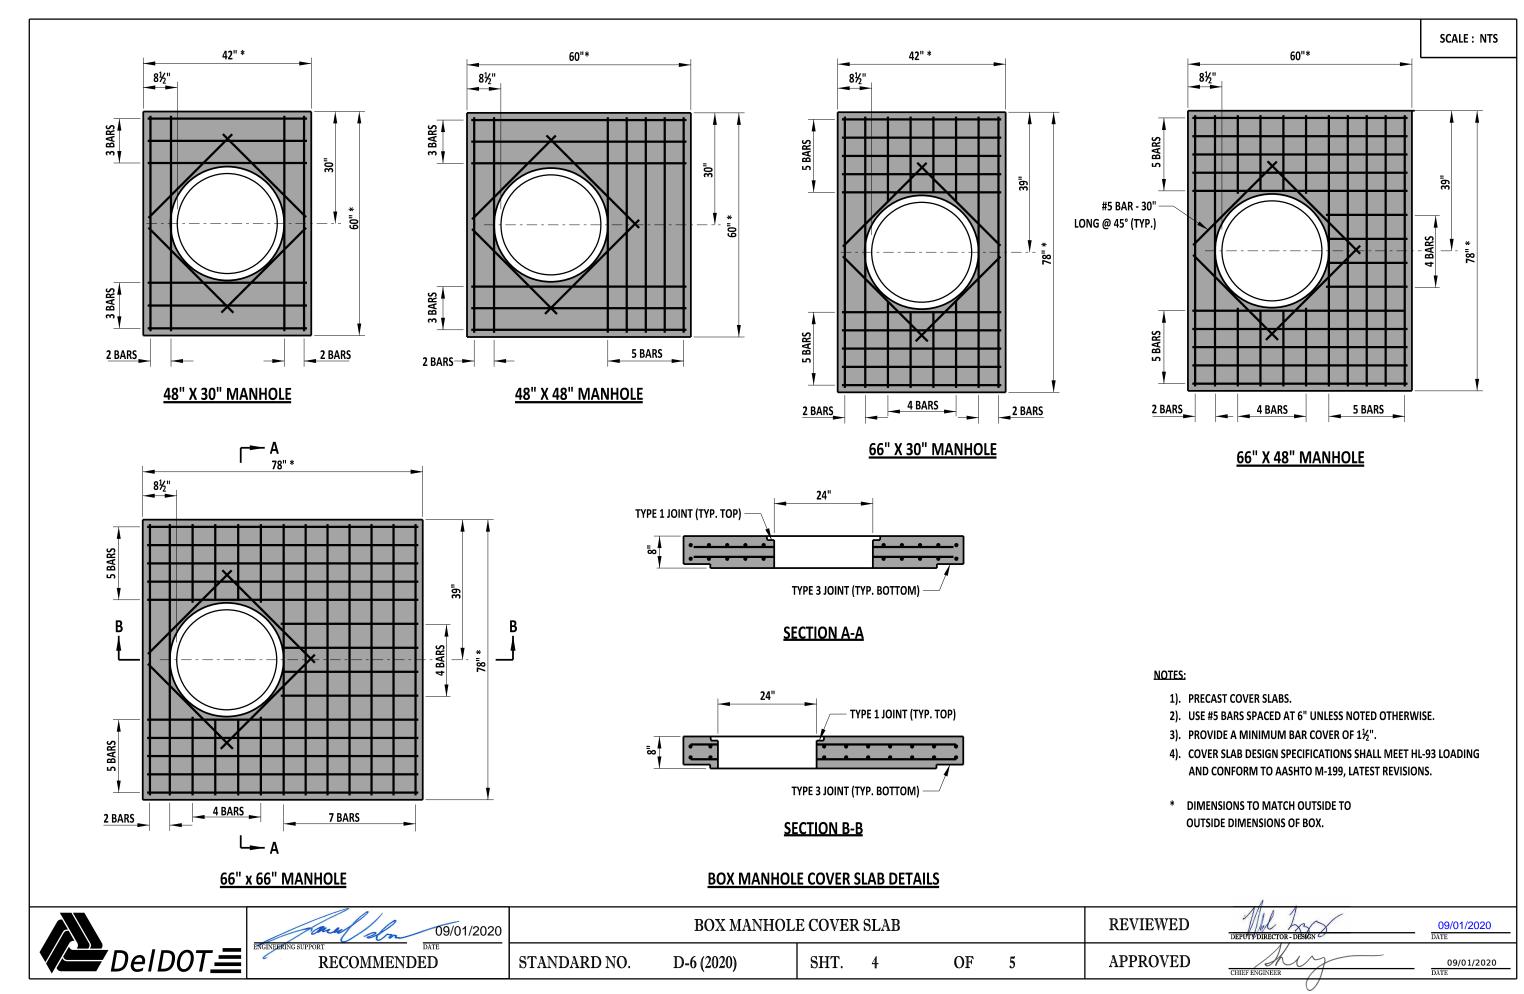

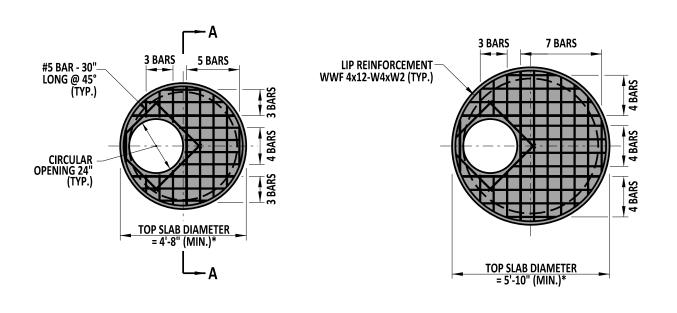



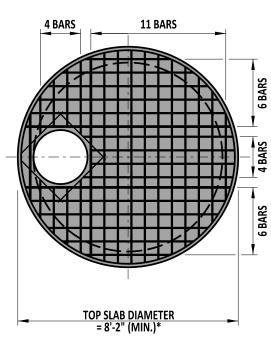


48" DIAMETER MANHOLE

60" DIAMETER MANHOLE

72" DIAMETER MANHOLE

84" DIAMETER MANHOLE

ROUND MANHOLE COVER SLAB DETAILS

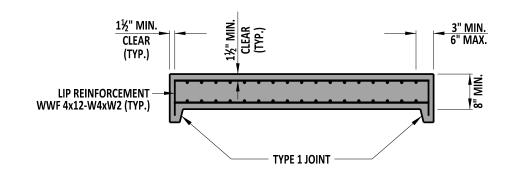

SECTION A-A (ADDITIONAL REINFORCEMENT NOT SHOWN)

NOTES:

- 1). PRECAST COVER SLABS.
- 2). USE #5 BARS SPACED AT 6" UNLESS NOTED OTHERWISE.
- 3). PROVIDE A MINIMUM BAR COVER OF 1½".
- 4). COVER SLAB DESIGN SPECIFICATIONS SHALL MEET HL-93 LOADING AND CONFORM TO AASHTO M-199, LATEST REVISIONS.
- * DIMENSIONS TO MATCH OUTSIDE TO OUTSIDE DIMENSIONS OF MANHOLE. SEE SHEET 3 OF 5 FOR MINIMUM WALL THICKNESS.



RECOMMENDED

09/01/2020

STANDARD NO. D-6 (2020)

SHT. 5

ROUND MANHOLE COVER SLAB

OF 5


APPROVED

REVIEWED


09/01/2020


09/01/2020

D-7 DETAIL RESERVED LEFT BLANK FOR FUTURE






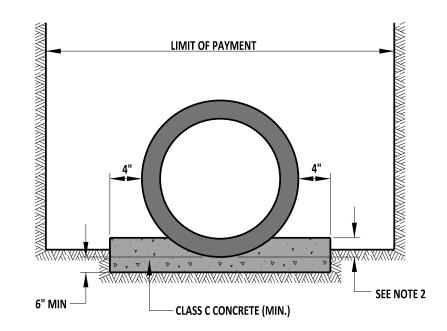

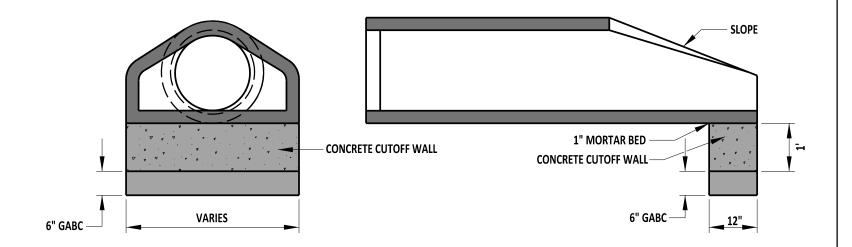

CLASS A PIPE BEDDING

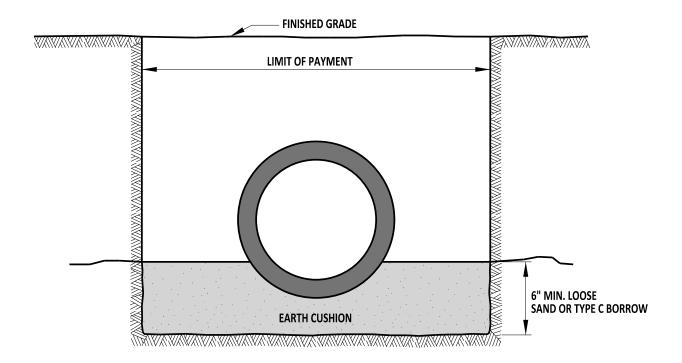

END SECTIONS FOR CONCRETE PIPE

NOTES:

- 1). USE CLASS C BEDDING UNLESS OTHERWISE INDICATED.
- 2). FOR CLASS A BEDDING, IMBED PIPE IN CONCRETE 6" FOR PIPES SMALLER THAN 24" I.D., 10" FOR PIPES 24" TO 60", AND FOR
- PIPES LARGER THAN 60" SEE PROJECT DETAILS.

 3). USE IN SITU MATERIAL AS APPROVED BY THE ENGINEER OR AS PER MANUFACTURER REQUIREMENTS.


 4). USE CLASS B CONCRETE FOR CONCRETE CUTOFF WALLS, PRECAST
- AS DIRECTED BY THE ENGINEER.

CLASS C PIPE BEDDING


PIPE BEDDING

DelDOT

Janel Son 09/01/2020	PIPE BEDDING AND PIP	E FLARE	DEND S	UPPORT	REVIEWED	DEPUTY DIRECTOR - DESIGN	09/01/2020 DATE	
RECOMMENDED	STANDARD NO. D-8 (2020)	SHT.	1	OF	1	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

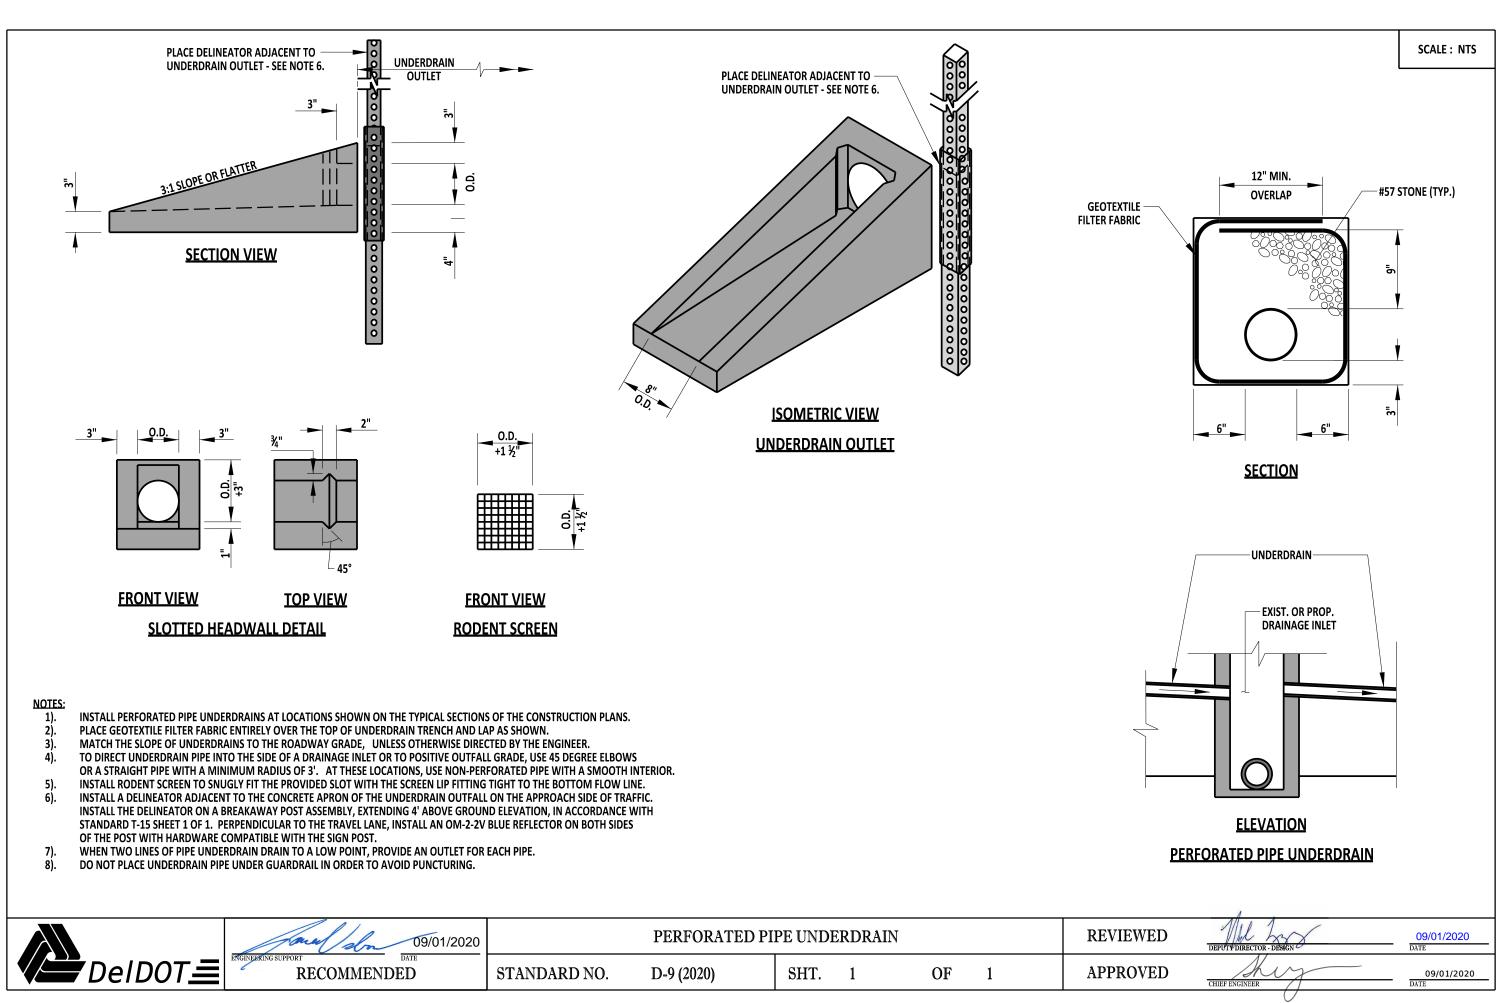



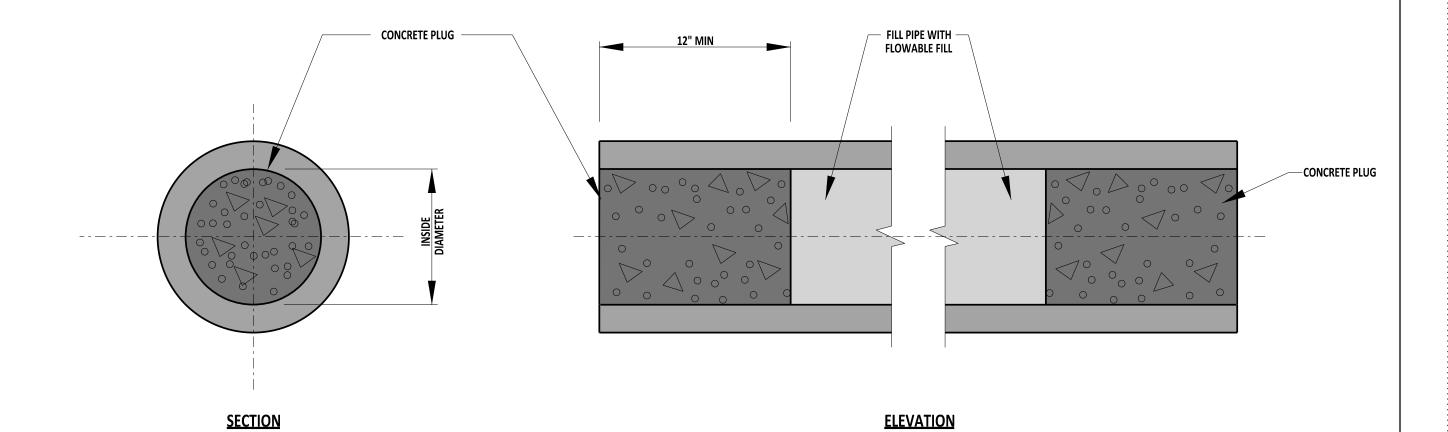

NOTE:
FURNISH FLOWABLE FILL MATERIAL AND PLUG ABANDONED
DRAINAGE PIPES WITH CONCRETE AS DIRECTED BY THE ENGINEER.

	Janel Son 09/01/2020		PIPE PL	UGGING				REVIEWED	DEPUTY DIRECTOR - DESIGN	09/01/2020 DATE
V DeIDOT <u></u> ■	RECOMMENDED	STANDARD NO.	D-10 (2020)	SHT.	1	OF	1	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

D-11 DETAIL RESERVED LEFT BLANK FOR FUTURE



RECOMMENDED

STANDARD NO.

D-11 (2020)


SHT. 1


OF


APPROVED

REVIEWED


CHIEF ENGINEER

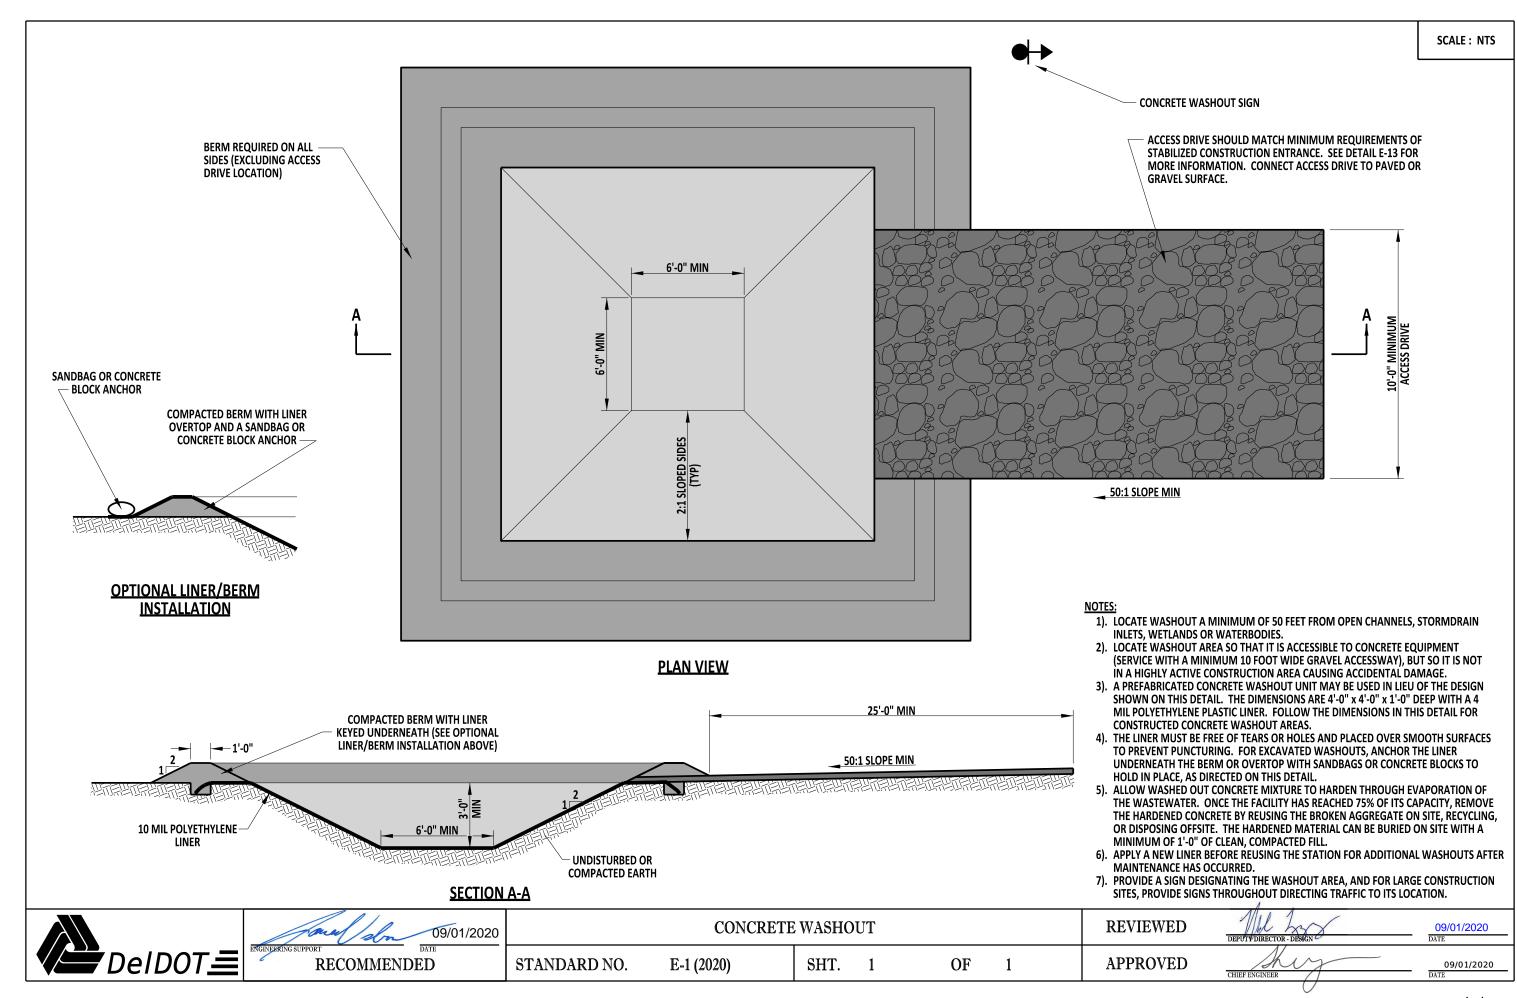


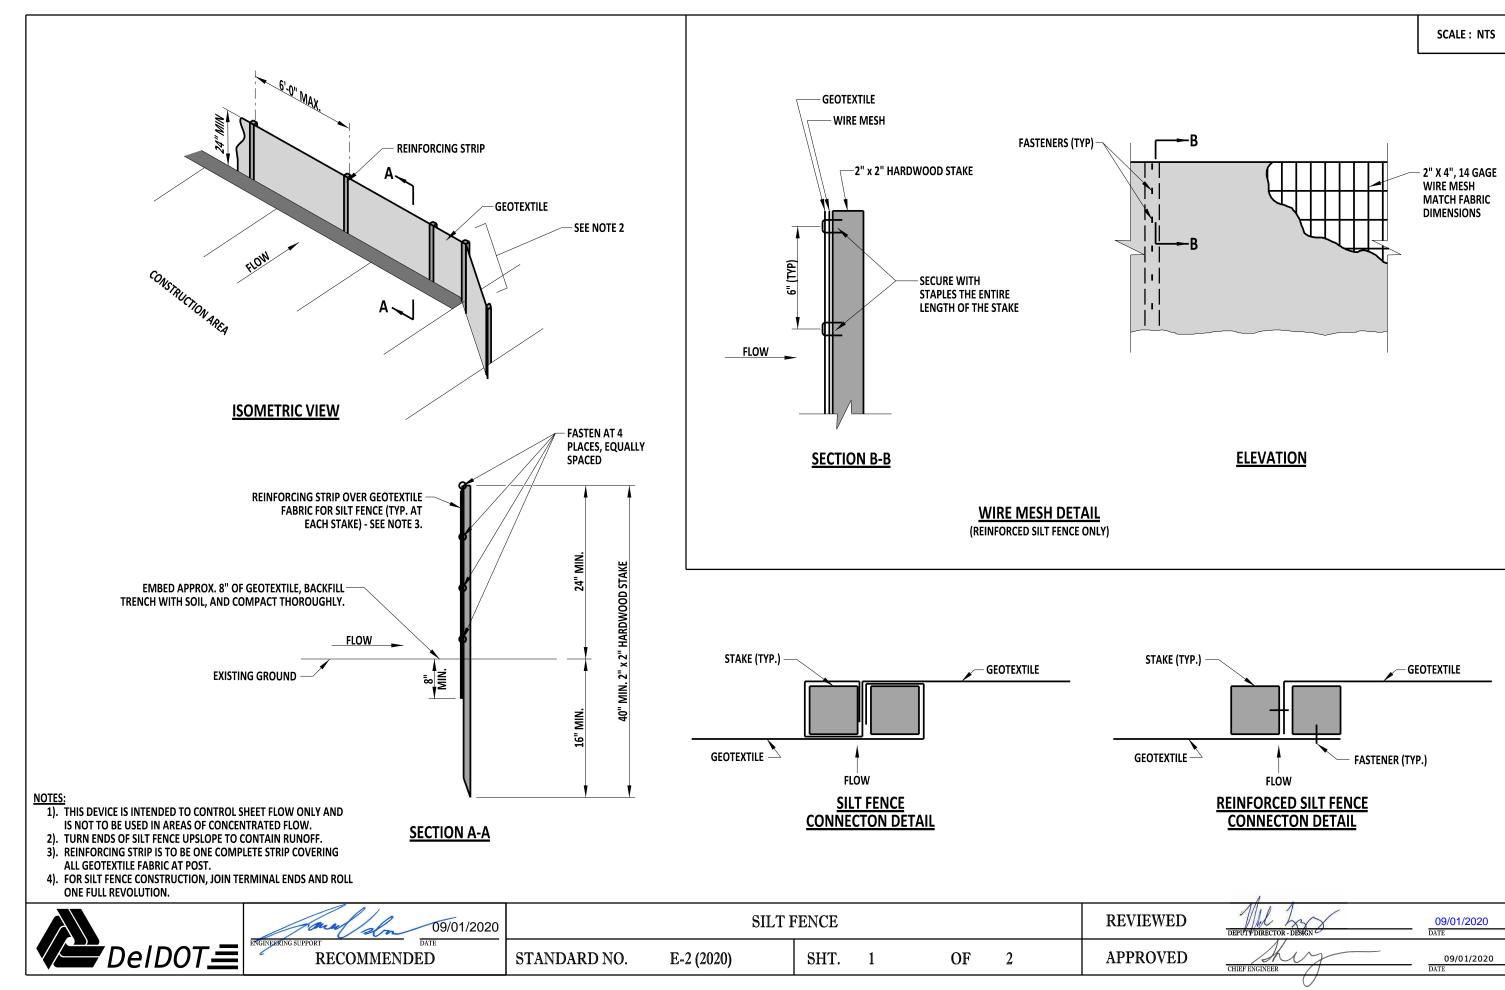

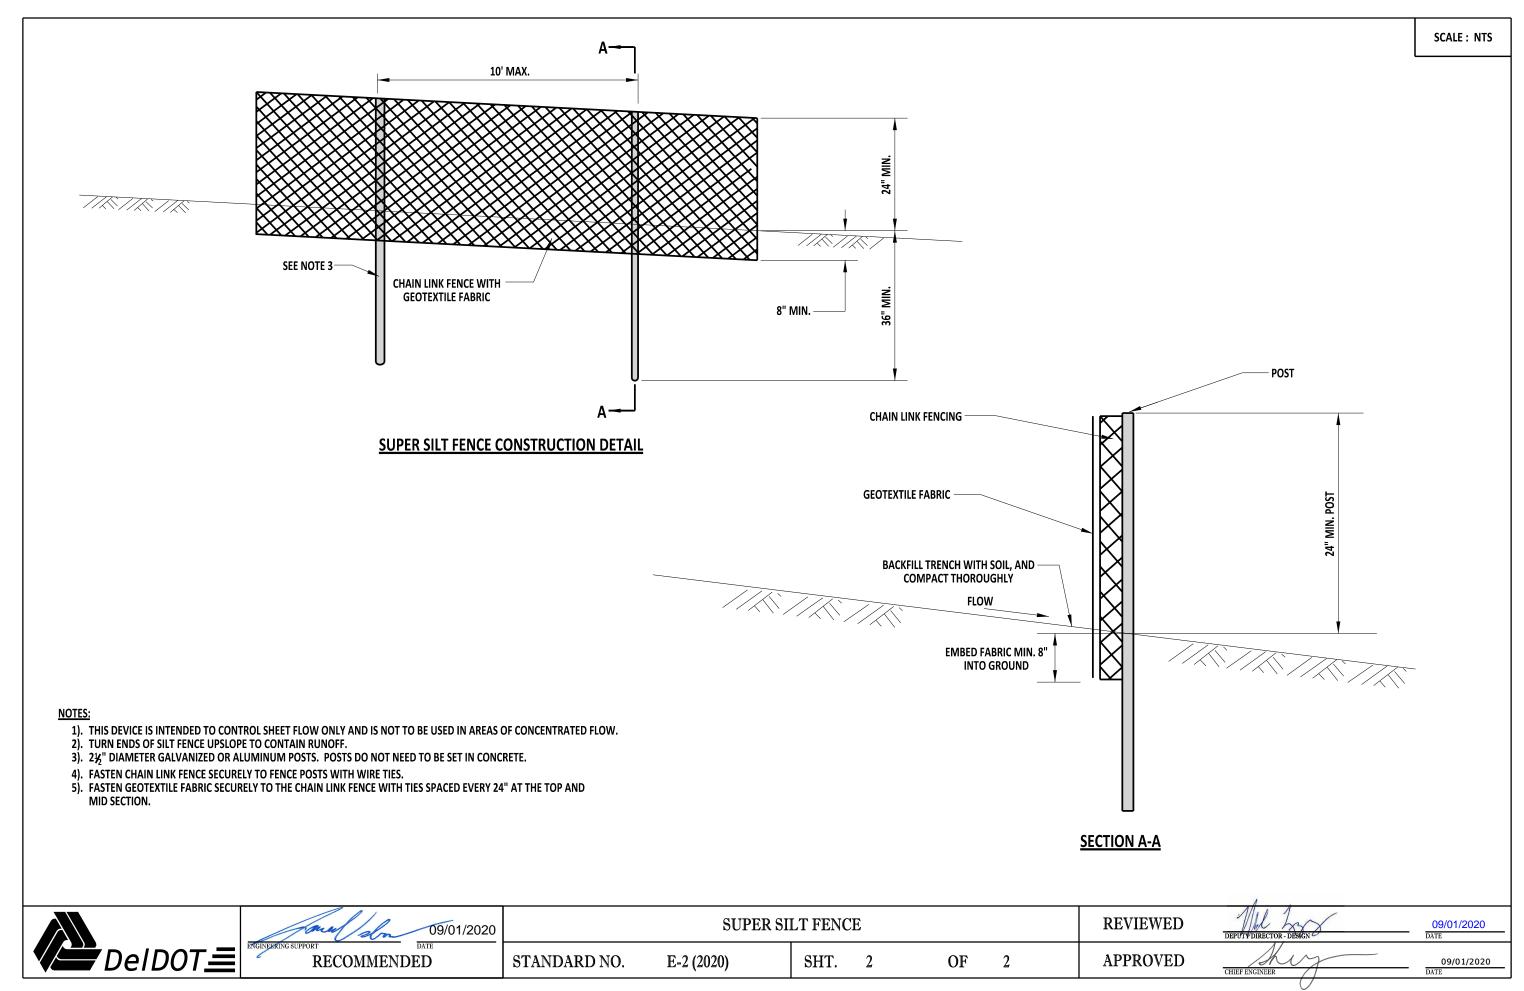




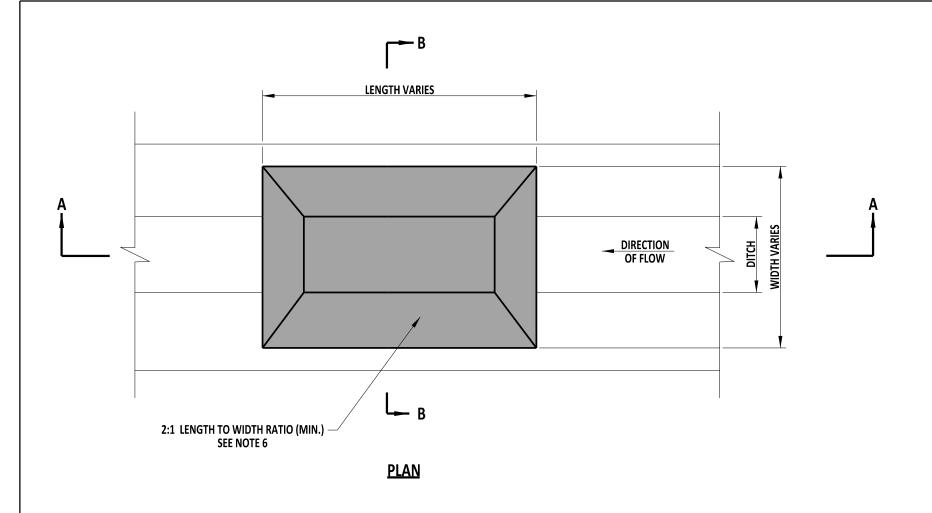



SECTION B-B

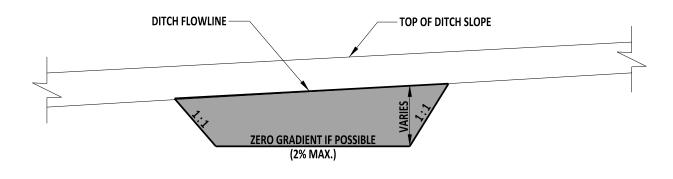


SECTION A-A

NOTES:

- 1). SEDIMENT TRAPS ARE INTENDED FOR USE IN EXISTING, PROPOSED, AND TEMPORARY DITCHES OF ALL TYPES WITH A MAXIMUM DRAINAGE AREA OF 5 ACRES, AS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.
- 2). STABILIZE SIDE SLOPES WITH TEMPORARY GRASS SEEDING AS PER SPECIFICATIONS.
 3). AN OUTLET STRUCTURE IS REQUIRED AND IS NOTED ON THE PLANS.
- 4). ALL FILL SLOPES ARE TO HAVE A SLOPE OF 2:1.
- 5). THE SEDIMENT TRAP LENGTH TO WIDTH RATIO IS TO BE 2:1. SPECIAL DESIGNS ARE PERMITTED TO INCREASE THE FLOW TIME AFTER APPROVAL BY THE STORMWATER ENGINEER.
- 6). IF A COMPOST FILTER LOG IS UTILIZED ON THE DOWNSTREAM SIDE OF THE SEDIMENT TRAP, STAKE THE COMPOST FILTER LOG 6" ON CENTER.
- 7). IF R4 RIPRAP IS UTILIZED ON THE DOWNSTREAM SIDE OF THE SEDIMENT TRAP, CHOKE THE R-4 RIPRAP WITH DELAWARE NO. 3 STONE ON THE FLOW FACE.



REVIEWED SEDIMENT TRAP 09/01/2020 09/01/2020 RECOMMENDED STANDARD NO. SHT. 1 **APPROVED** E-3 (2020) OF 09/01/2020 CHIEF ENGINEER

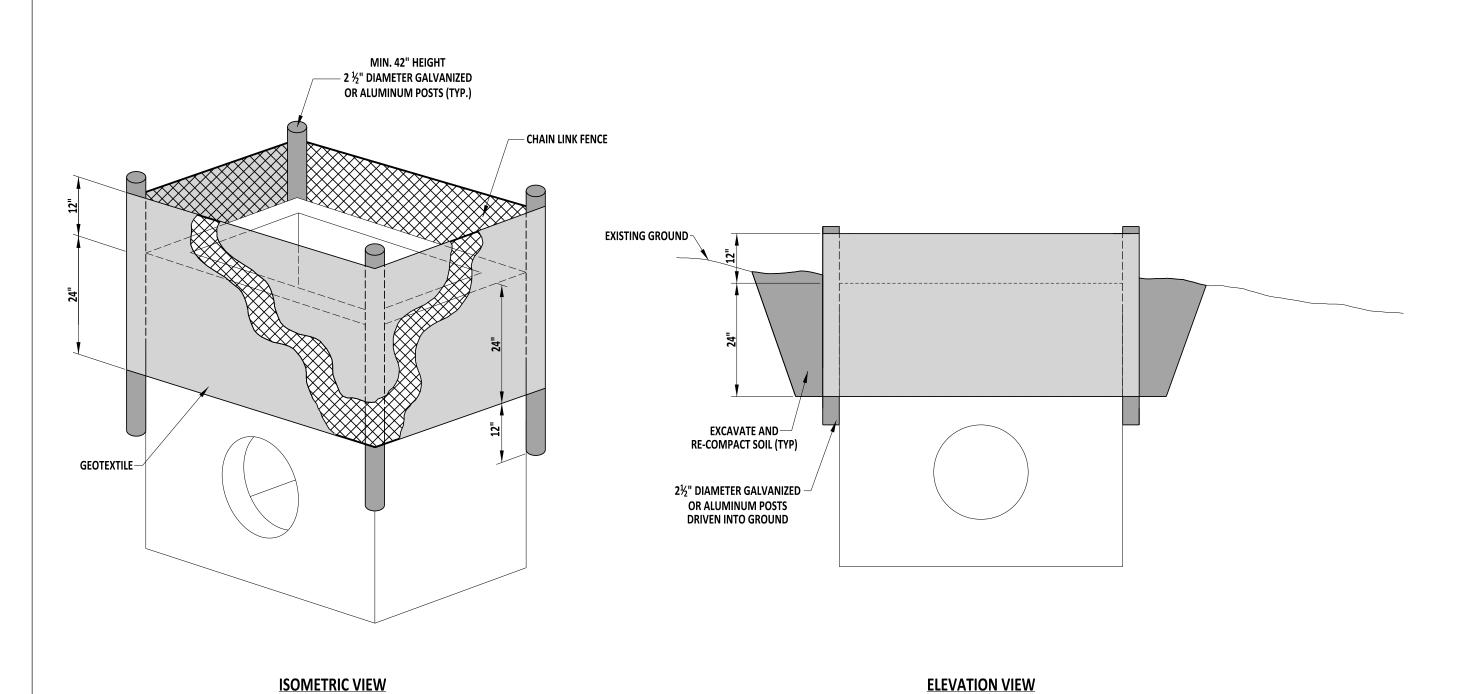

NOTES:

COMPOST FILTER LOG IS PAID SEPARATELY FROM SEDIMENT CONTROL, DRAINAGE INLET.



09/01/2020 RECOMMENDED

INLET SEDIMENT CONTROL, DRAINAGE INLET STANDARD NO. E-4 (2020)


SHT. 1 OF **REVIEWED**

APPROVED


09/01/2020 Date


09/01/2020 DATE



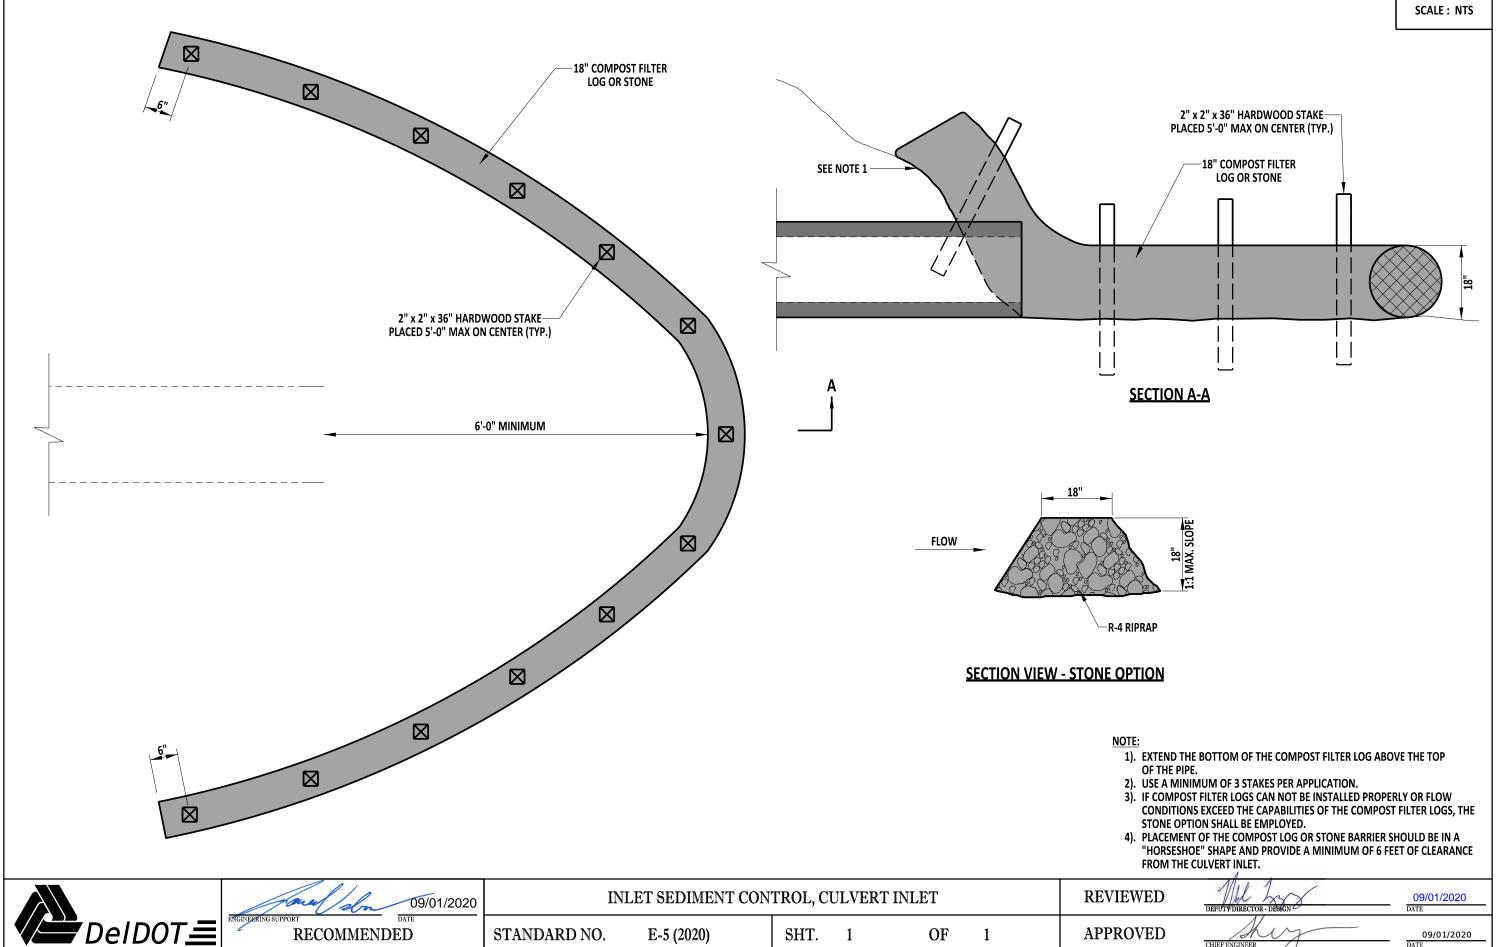



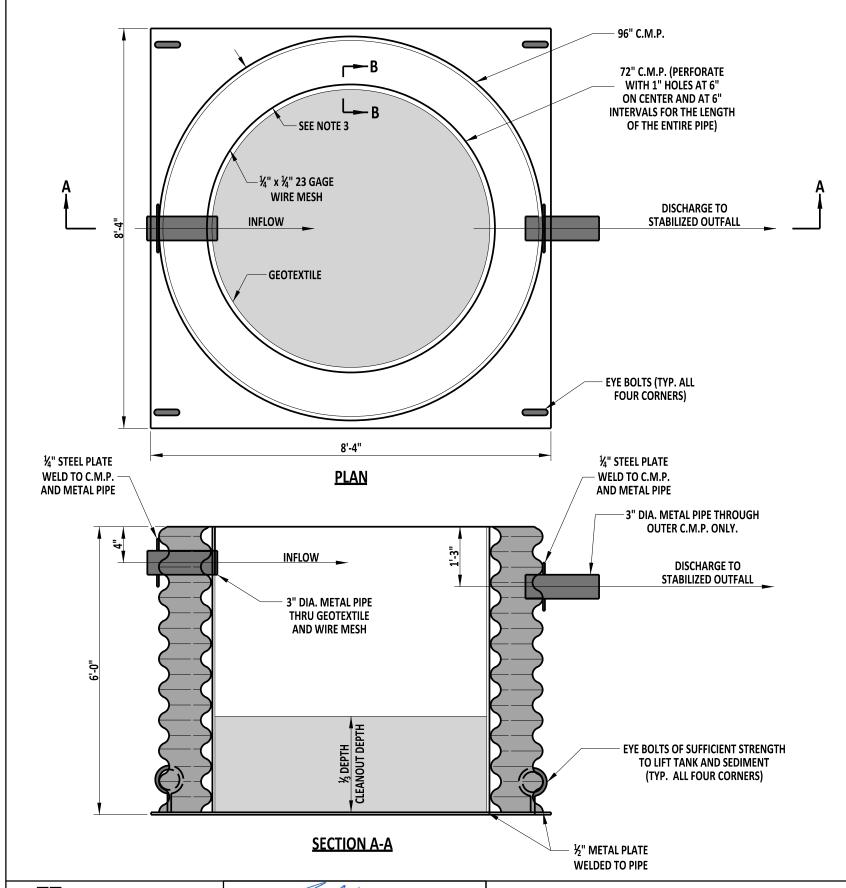



- NOTES:

 1). THE MAXIMUM PUMP DISCHARGE IN THIS TYPICAL PORTABLE SEDIMENT TANK IS 125 GALLONS PER MINUTE. REPLACE THE GEOTEXTILE WHEN THE PORTABLE SEDIMENT TANK CAN NO LONGER ALLOW THE PORTABLE SEDIMENT TANK CAN NO LONGER SE THIS FLOW RATE, WHEN THERE IS A TEAR, OR WHEN DIRECTED BY THE ENGINEER.

 2). SEVERAL UNCONNECTED OR CONNECTED IN PARALLEL PORTABLE SEDIMENT TANKS MAY BE USED WHEN
 - A HIGHER FLOW RATE IS NEEDED TO DEWATER THE JOB.
 - 3). PLACE 72" C.M.P. SO THAT IT IS CENTERED IN THE 96" C.M.P. AND THERE IS AN EQUAL AMOUNT OF SPACE BETWEEN THE TWO PIPES.

CHIEF ENGINEER



09/01/2020 RECOMMENDED

STANDARD NO.

PORTABLE SEDIMENT TANK

E-6 (2020)


SHT. 1


OF


REVIEWED APPROVED


09/01/2020 DEPUTY DIRECTOR - DESIGN


09/01/2020

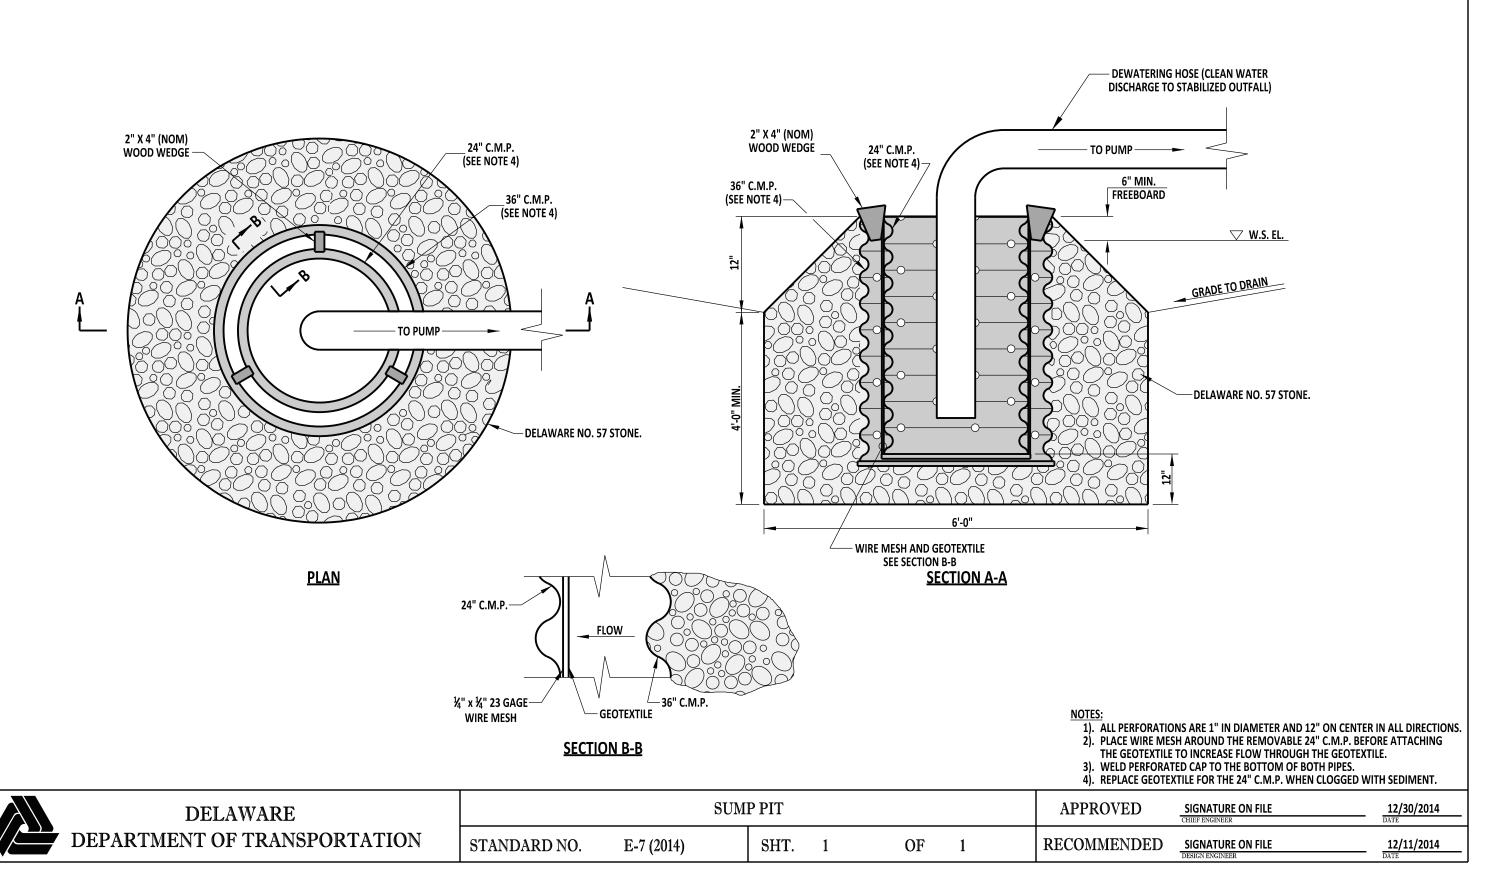

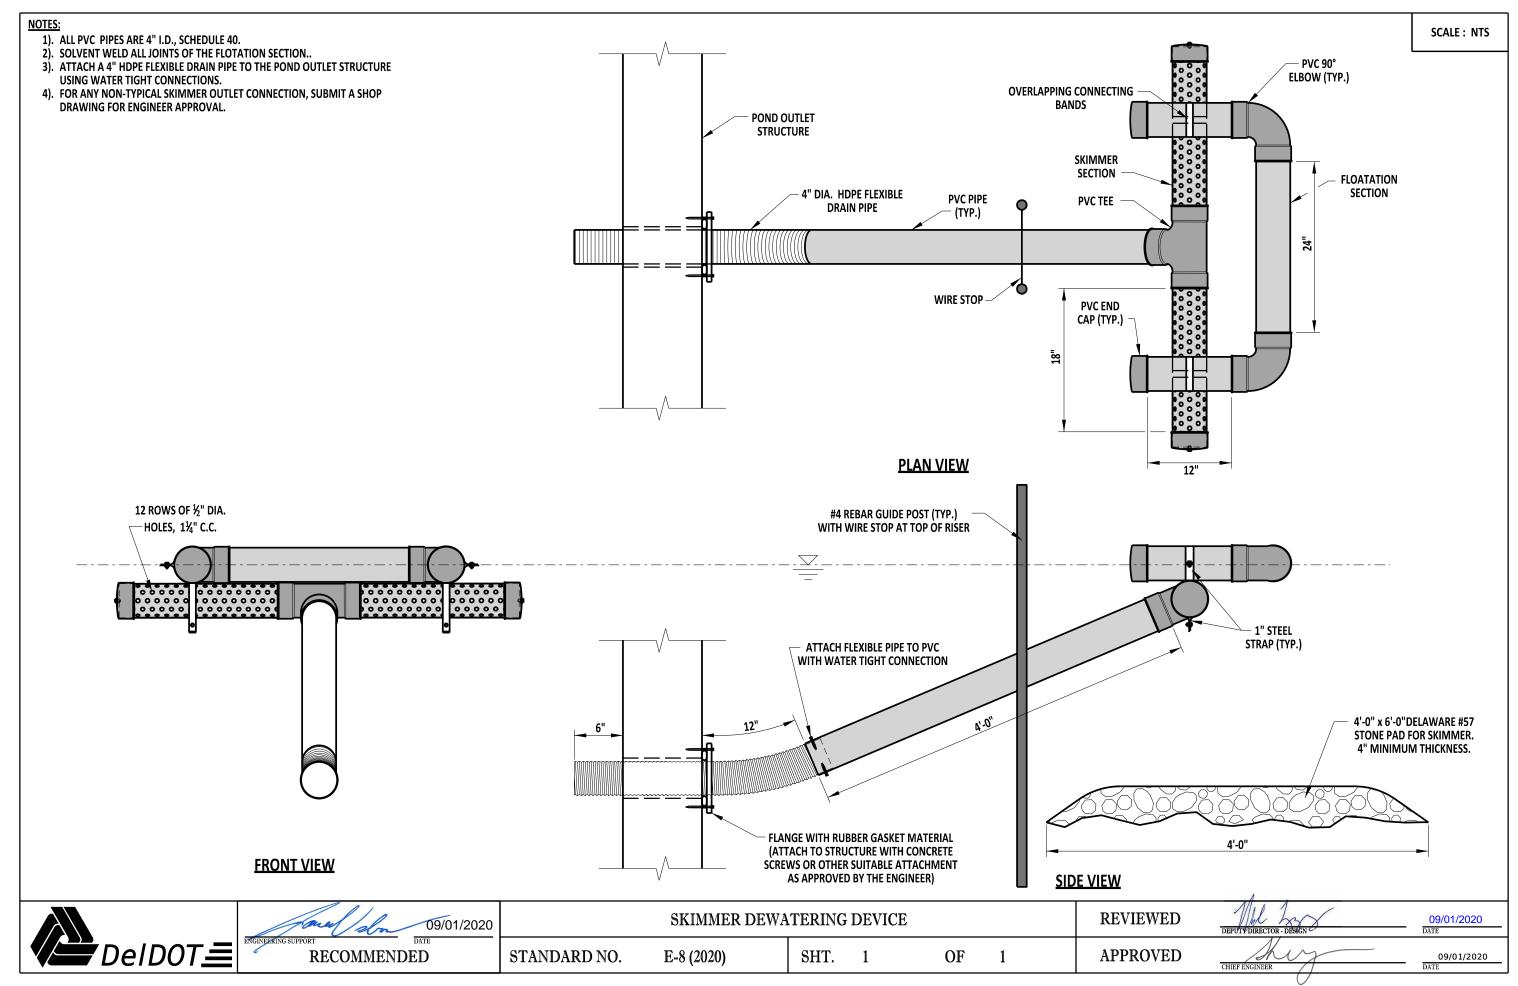

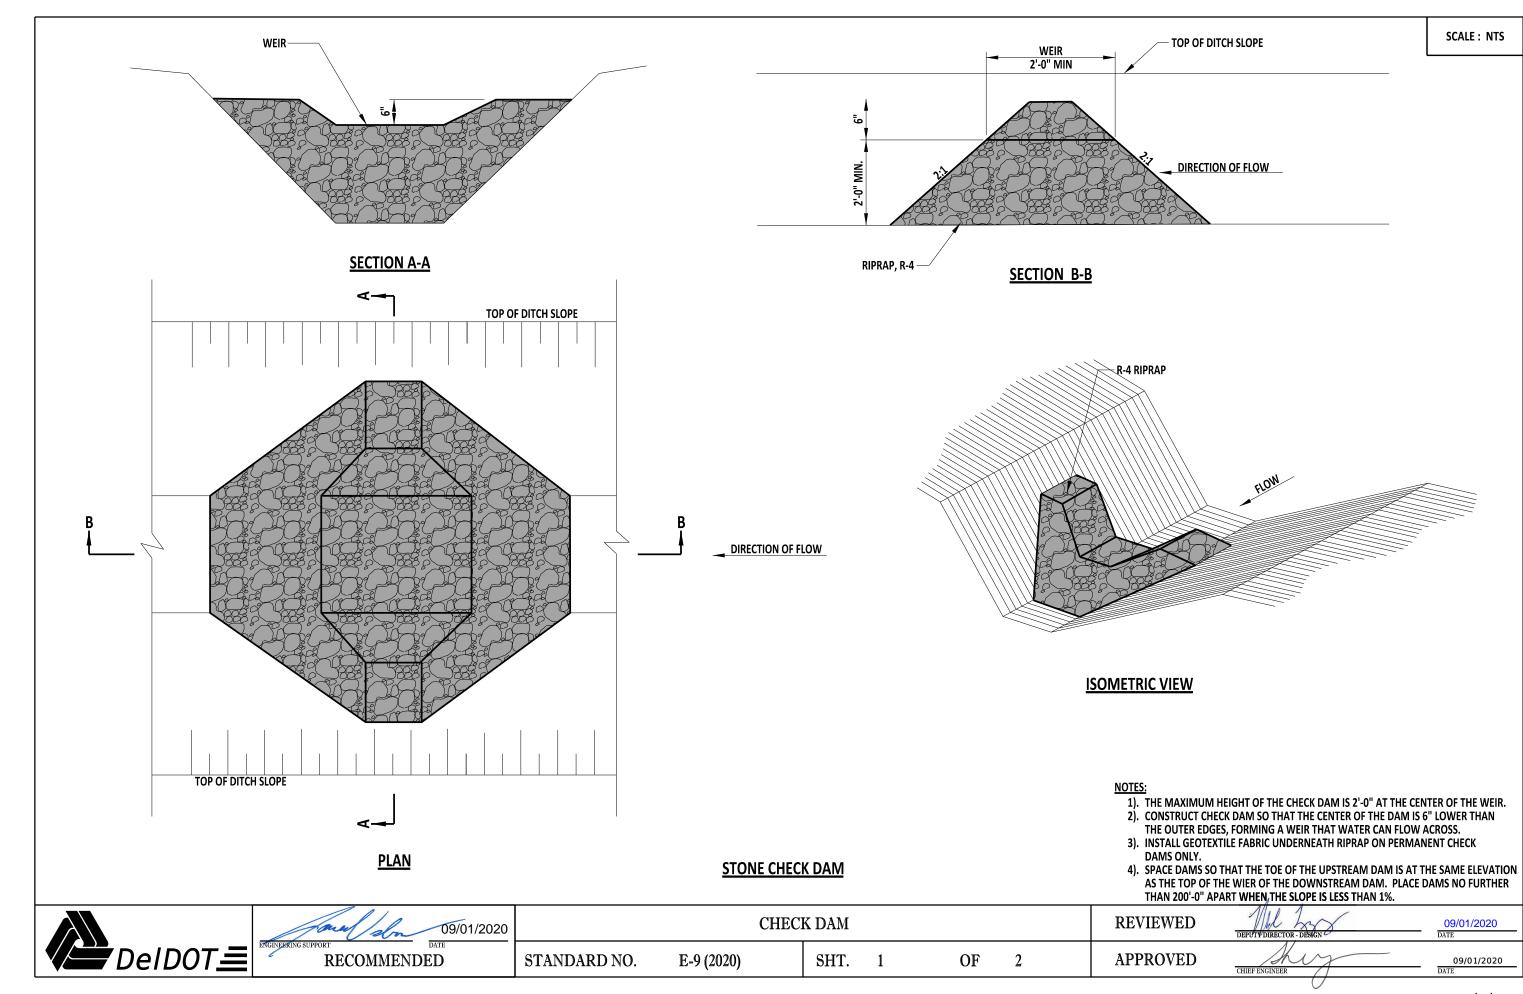

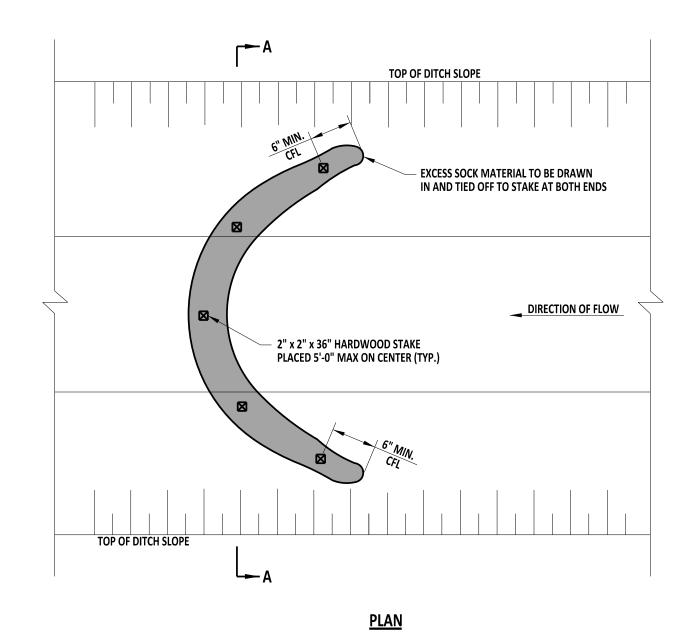

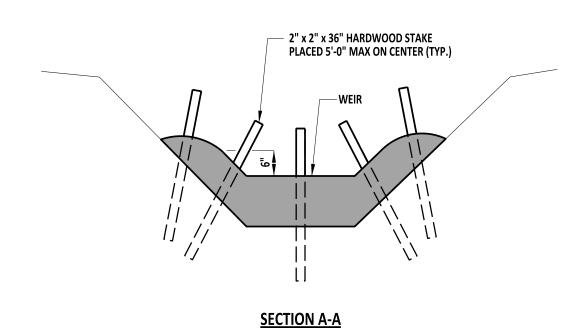

NOTES:

- 1). THE MAXIMUM HEIGHT OF THE CHECK DAM IS 2'-0" AT THE CENTER OF THE WEIR.
- 2). CONSTRUCT CHECK DAM SO THAT THE CENTER OF THE DAM IS 6" LOWER THAN THE OUTER EDGES, FORMING A WEIR THAT WATER CAN FLOW ACROSS. THE ENDS OF THE COMPOST FILTER LOG SHALL WRAP UPSLOPE TO PREVENT END CUTTING.
- 3). SPACE DAMS SO THAT THE TOE OF THE UPSTREAM DAM IS AT THE SAME ELEVATION AS THE TOP OF THE WIER OF THE DOWNSTREAM DAM. PLACE DAMS NO FURTHER THAN 200'-0" APART WHEN THE SLOPE IS LESS THAN 1%.

	DeIDOT <u></u>	ENGINEERI
--	----------------	-----------

RECOMMENDED

09/01/2020

STANDARD NO.

E-9 (2020)

COMPOST FILTER LOG CHECK DAM

CHECK DAM

SHT. 2


OF 2 **REVIEWED**

APPROVED


09/01/2020

CHIEF ENGINEER


09/01/2020

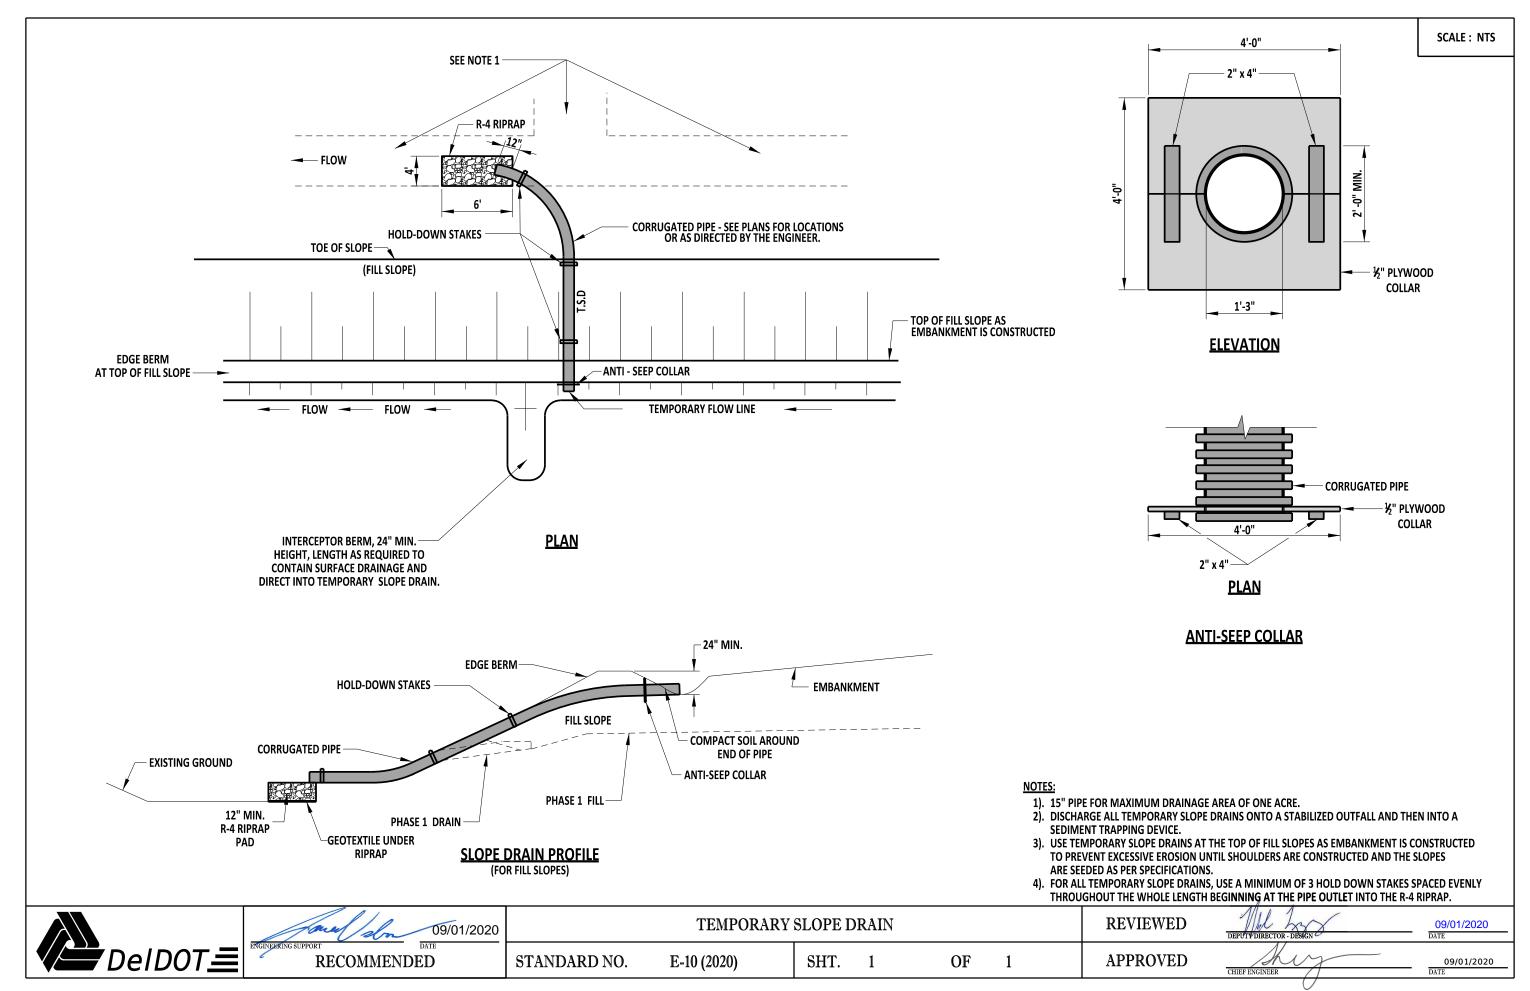


E-11 DETAIL RESERVED LEFT BLANK FOR FUTURE




E-12 DETAIL RESERVED LEFT BLANK FOR FUTURE




E-13 DETAIL RESERVED LEFT BLANK FOR FUTURE





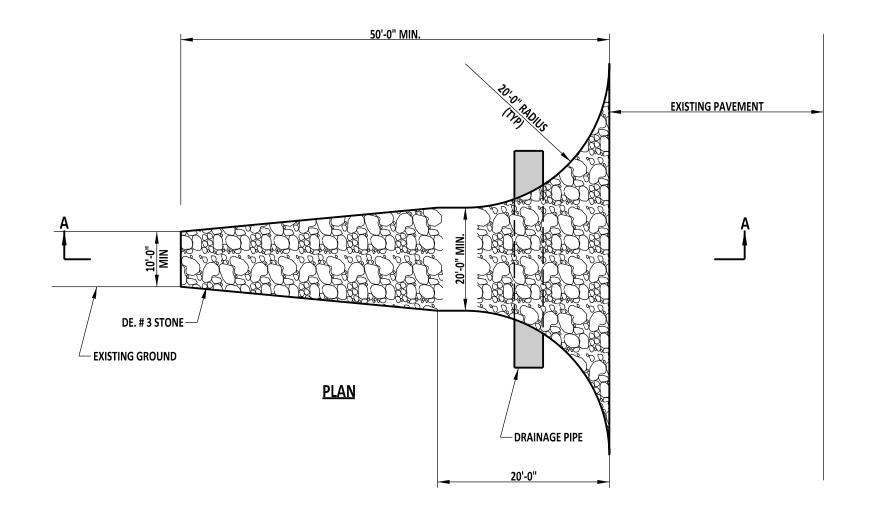

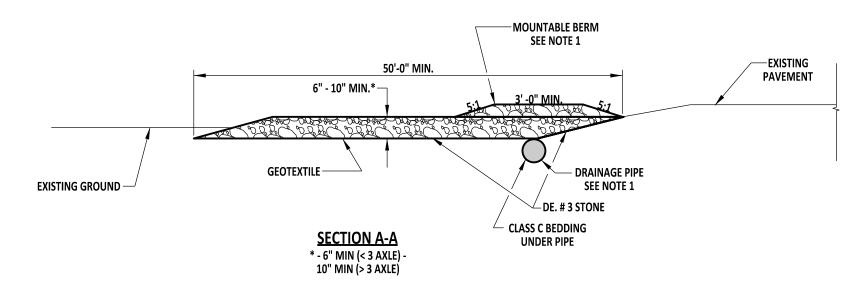

- NOTES:

 1). PIPE ALL SURFACE WATER THAT IS FLOWING OR DIVERTED TOWARDS THE CONSTRUCTION ENTRANCE UNDER THE ENTRANCE. A MOUNTABLE BERM AS SHOWN ON THIS DETAIL, IS

 TO FACILITATE DI ACEMENT OF PIPES IN SHALLOW CONDITIONS.
 - 2). SEE PLANS FOR LOCATION AND NUMBER OF STABILIZED CONSTRUCTION ENTRANCES. PRIOR APPROVAL BY THE ENGINEER IS REQUIRED FOR ANY CHANGE IN LOCATION OR NUMBER OF ENTRANCES.
- 3). REMOVE AND REPLACE TOP 2" OF STONE WITH 2" OF CLEAN STONE WHEN VOIDS ARE FILLED OR AS DIRECTED BY THE ENGINEER.

· • —


DELAWARE DEPARTMENT OF TRANSPORTATION

STABILIZED CONSTRUCTION ENTRANCE **APPROVED** STANDARD NO. SHT. 1 OF E-14 (2014)

RECOMMENDED

12/30/2014 DATE SIGNATURE ON FILE CHIEF ENGINEER

12/11/2014 DATE SIGNATURE ON FILE

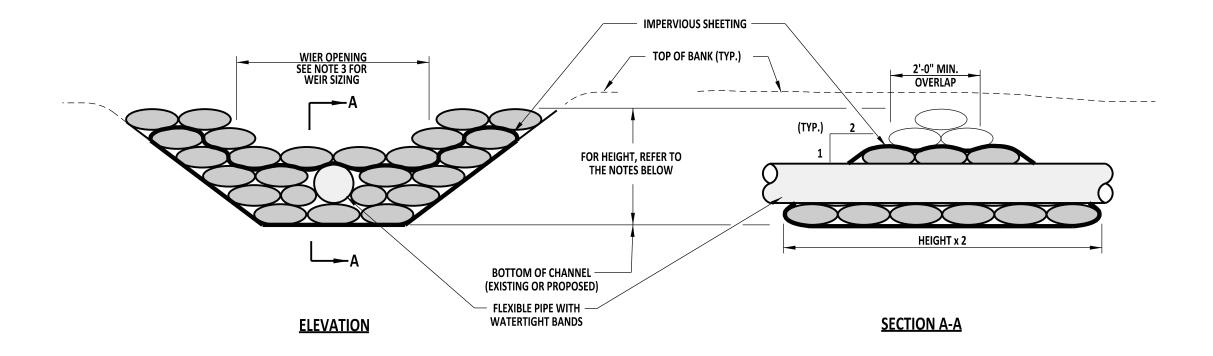



- NOTES:

 1). INSTALL SANDBAG DIKE IN UPSTREAM LOCATION FIRST.
 - 2). CONSTRUCT SANDBAG DIKE SUCH THAT THE HEIGHT IS 1'-0" ABOVE THE PEAK ELEVATION OF THE 1 YEAR STORM, OR 1'-0" BELOW THE TOP OF THE BANK,
- WHICHEVER IS LESS. SEE PLANS FOR MORE INFORMATION.

 3). CONSTRUCT WEIR SUCH THAT IT WILL PASS A 1 YEAR STORM EVENT PEAK FLOW. SEE PLANS FOR MORE INFORMATION.
- 4). SIZE THE PIPE SUCH THAT IT WILL ALLOW PASSAGE OF THE STREAM BASE FLOW.

DELAWARE		SANDBA	AG DIKE				APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	12/30/2014 DATE
DEPARTMENT OF TRANSPORTATION	STANDARD NO.	E-15 (2014)	SHT.	1	OF	1	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER	12/11/2014 DATE

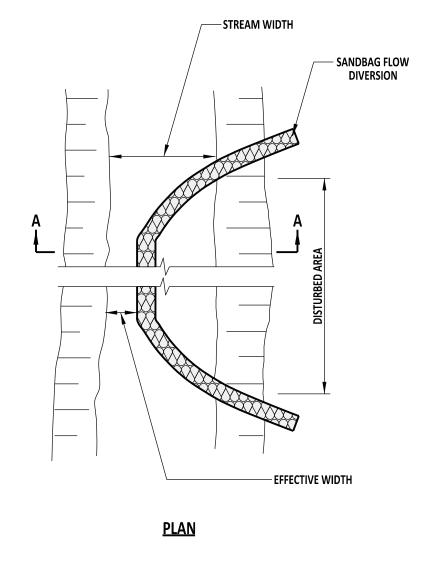

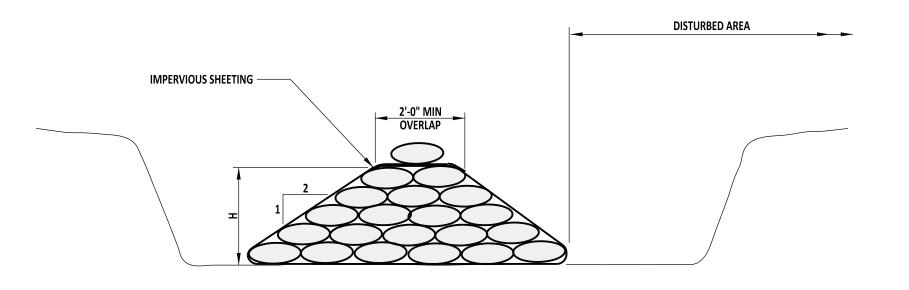

SECTION A-A


- NOTES:

 1). INSTALL DIVERSION STRUCTURE FROM UPSTREAM TO DOWNSTREAM.

 2). SIZE EFFECTIVE CHANNEL WIDTH SO THAT IT WILL PASS A 1 YEAR STORM EVENT PEAK FLOW, OR ¾ OF STREAM WIDTH, WHICHEVER IS GREATER.
- 3). CONSTRUCT SANDBAG DIVERSION HEIGHT SUCH THAT TOP OF THE DIVERSION STRUCTURE IS 1'-0" ABOVE THE 1 YEAR STORM PEAK ELEVATION.


	DELAWARE	
	DEPARTMENT OF TRANSPORTATION	ST

SANDBAG DIVERSION						APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	12/30/2014 DATE
STANDARD NO.	E-16 (2014)	SHT.	1	OF	1	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER	12/11/2014 DATE

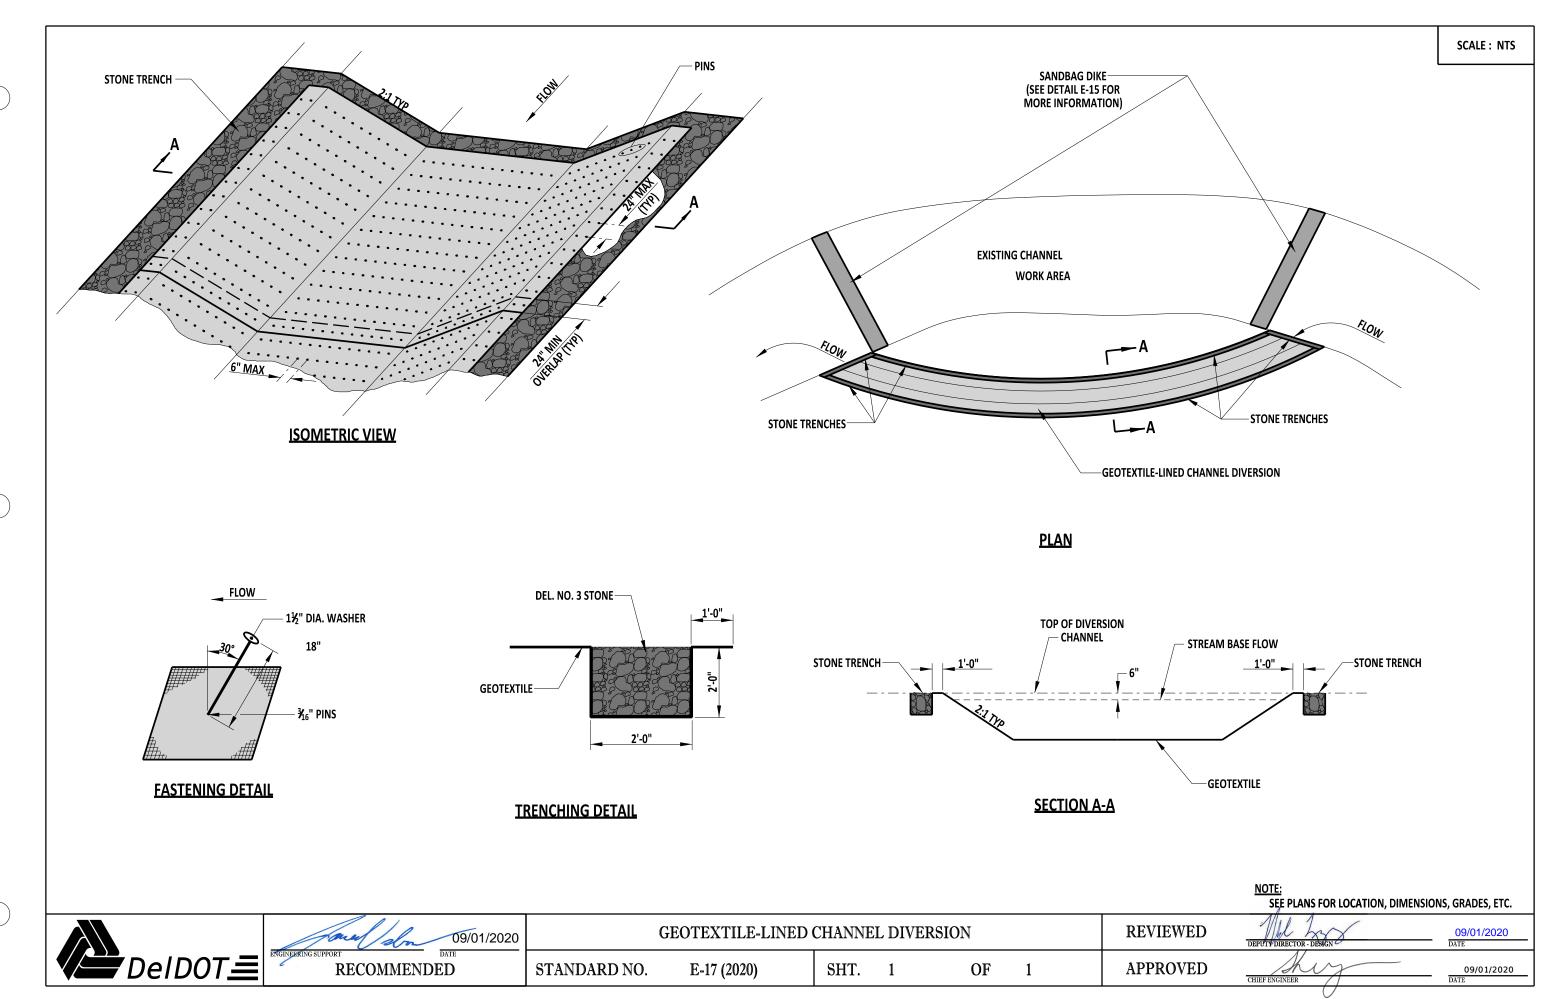





TOP LOAD LINE

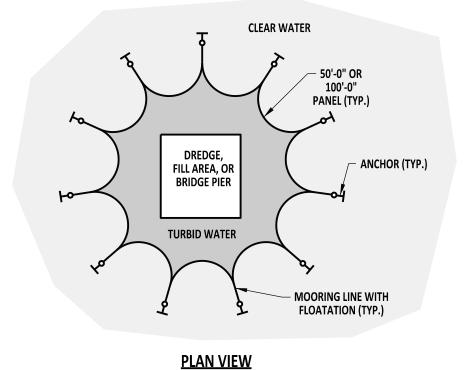

OPEN WATER APPLICATION

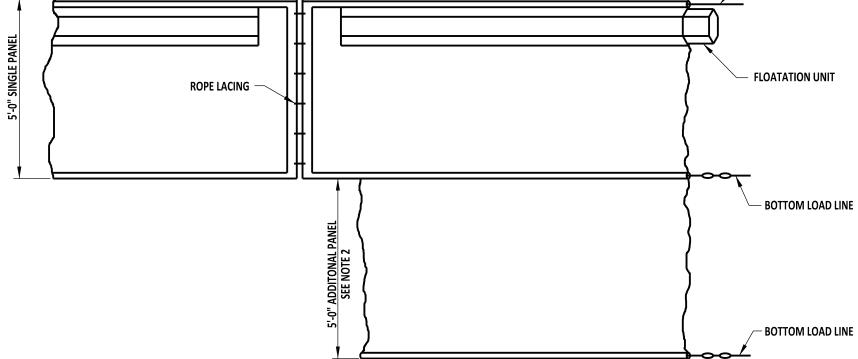

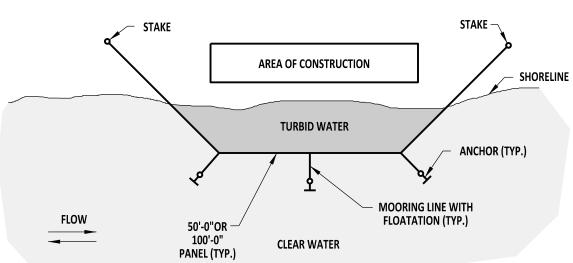

PLAN VIEW
SHORELINE APPLICATION


FLOATING TURBIDITY CURTAIN

- ADDITIONAL PANEL REQUIRED FOR DEPTHS GREATER THAN 5'-0".
 USE 2 TURBIDITY CURTAIN PANELS TO REACH BOTTOM DEPTHS OF 10'-0".
 SPECIAL DEPTH TURBIDITY CURTAIN PANELS ARE REQUIRED FOR DEPTHS GREATER THAN 10'-0" AND THEIR USE WITH BE CALLED OUT IN THE PLANS
 OR DIRECTED BY THE ENGINEER.

DELAWARE
DEPARTMENT OF TRANSPORTATION

	TURBIDIT	Y CURTA	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	12/30/2014 DATE			
STANDARD NO.	E-18 (2014)	SHT.	1	OF	1	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER	12/11/2014 DATE

ELEVATION

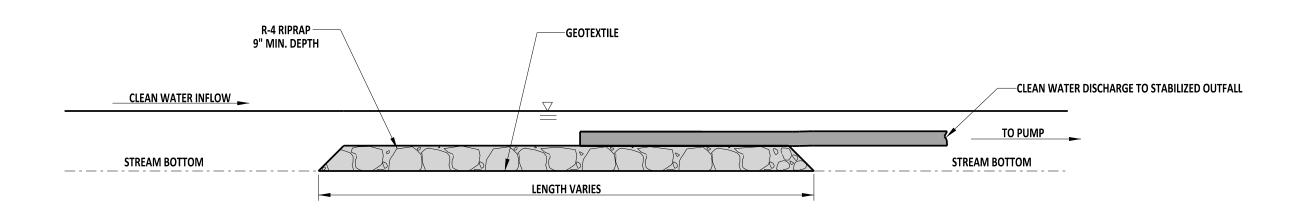

- NOTE:

 1). THE DIMENSIONS OF THE STILLING WELL ARE SHOWN ON THE PLANS OR DIRECTED BY THE ENGINEER. THE MINIMUM SIZE OF THE STILLING WELL IS 5'-0" x 5'-0".


 2). NO STREAMBED MATERIAL SHALL BE ALLOWED TO PASS THROUGH THE DEWATERING HOSE.

	DeIDOT <u></u>	j
--	----------------	---


Janel Son 09/01/2020		STILLIN	NG WELL				REVIEWED	DEPUTY DIRECTOR - DESIGN
RECOMMENDED	STANDARD NO.	E-19 (2020)	SHT.	1	OF	1	APPROVED	CHIEF DAICHNEED


09/01/2020 DATE

09/01/2020 DATE

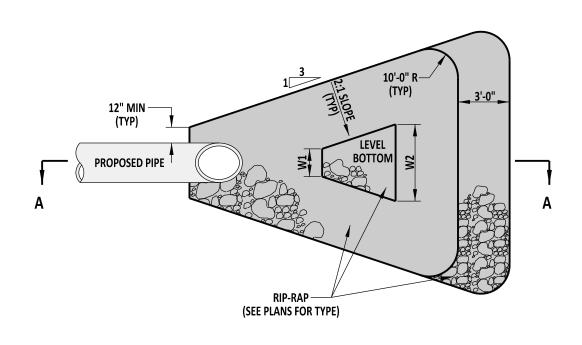

PLAN VIEW

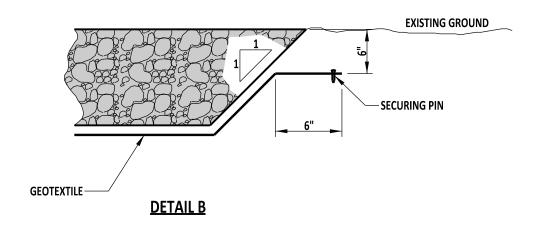


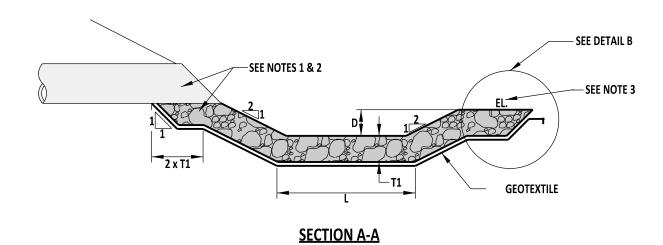


- NOTES:

 1). PLACE RIPRAP PRIOR TO PLACING PIPE.
 2). PLACE DELAWARE NO. 3 STONE UNDER PIPE.
 3). CONSTRUCT DISSIPATOR SUCH THAT THE ELEVATION (EL.) IS LOWER THAN PIPE INVERT.
 4). REFER TO THE PIPE ENERGY DISSIPATOR SCHEDULE ON THE PLANS FOR THE VALUE OF DIMENSION VARIABLES.

	DELAWARE DEPARTMENT OF TRANSPORTATION		RIPRAP ENERO	GY DISSIF	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	12/30/2014 DATE		
D		STANDARD NO.	E-20 (2014)	SHT.	1	OF	1	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER

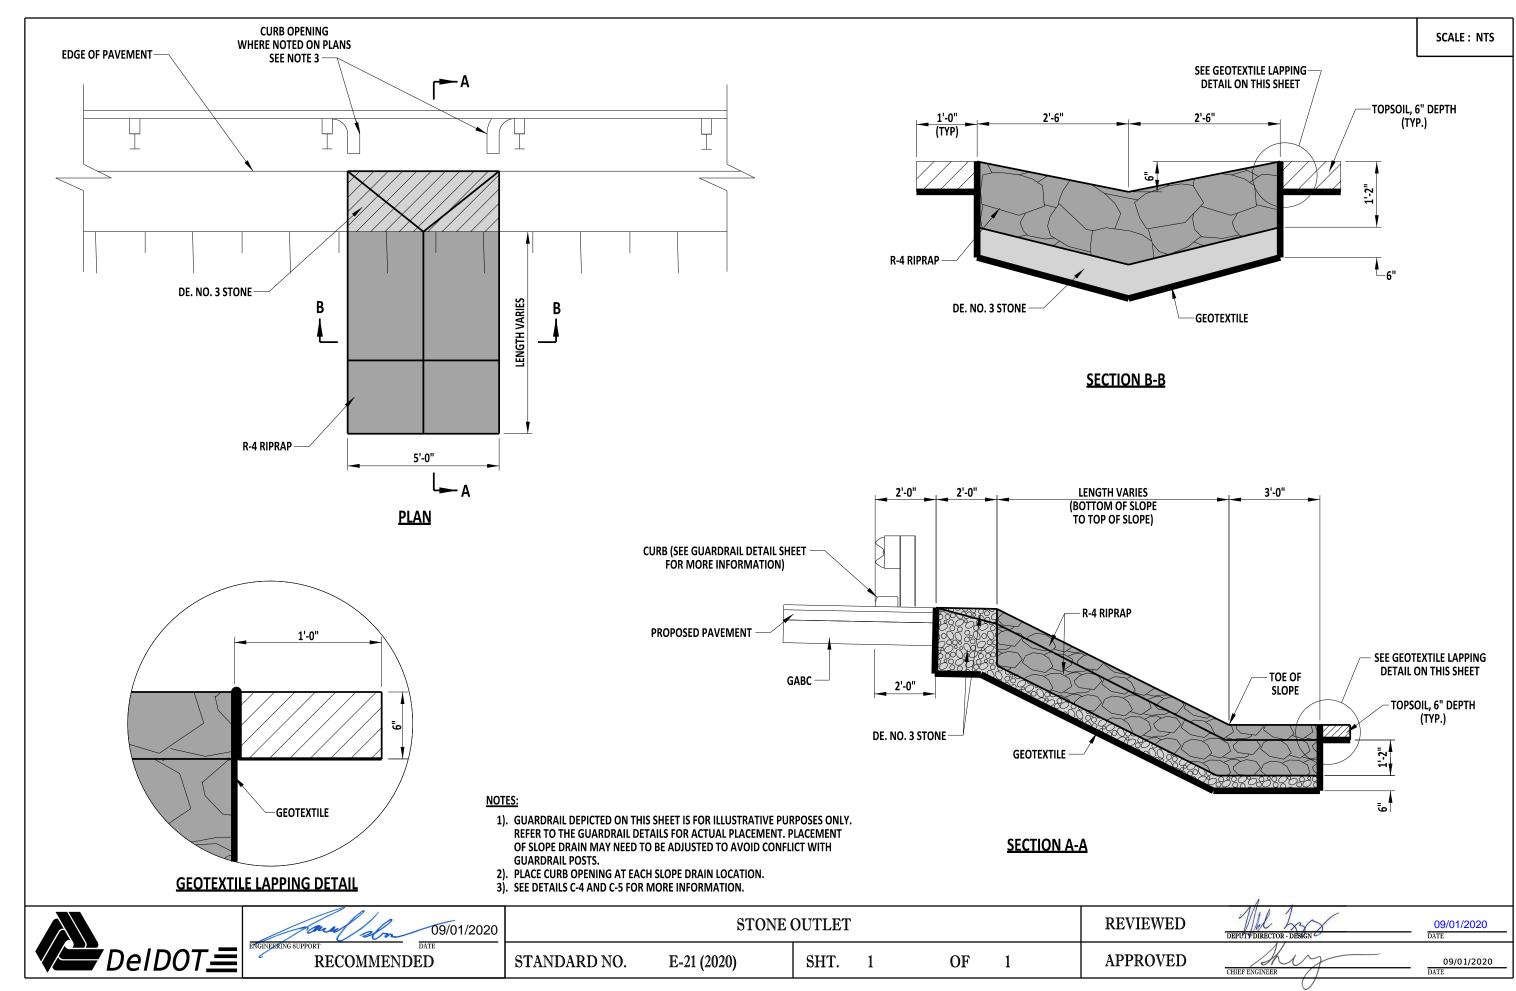

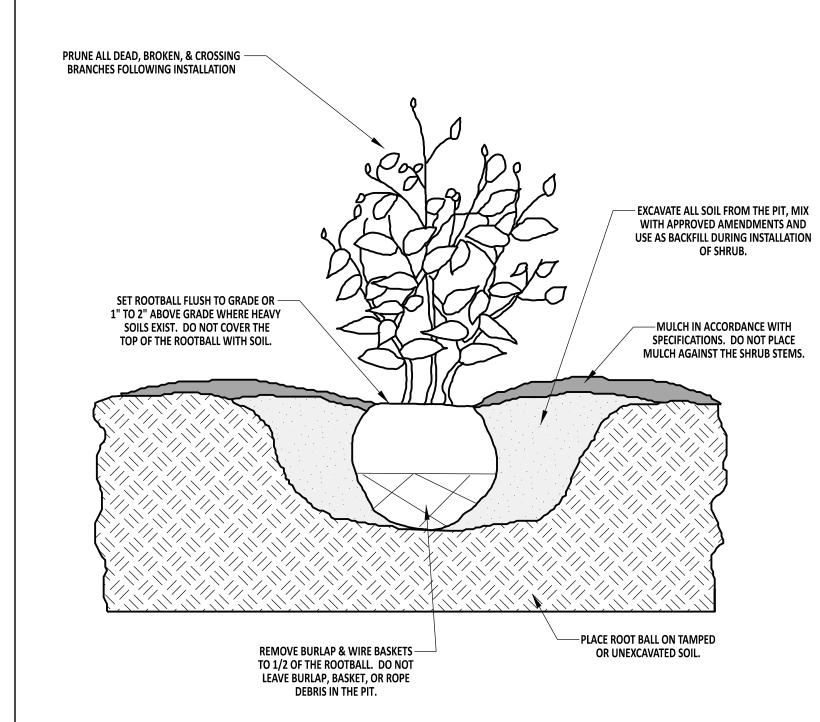


NOTES

- 1). DIG BASE OF PLANTING PIT A MINIMUM OF TWO AND A MAXIMUM OF THREE TIMES THE SIZE OF THE ROOT BALL.
- INSTALL SHRUBS IN MASSES OF NO LESS THAN 3 PLANTS. A MINIMUM OF 3'-0" IS REQUIRED FROM MIDDLE OF SHRUB TO ANY PERMANENT STRUCTURE (I.E. CURB, SIDEWALK, BUILDING, ETC...)
 SHRUB PRUNING IS TO BE PERFORMED BY AN I.S.A. CERTIFIED ARBORIST, CERTIFIED NURSERY
- PROFESSIONAL, OR UNDER THE DIRECTION THEREOF. DO NOT HEAVILY PRUNE SHRUBS AT PLANTING.
- 4). HAND DIG AUGERED HOLES TO FINAL WIDTH AND DEPTH TO ELIMINATE GLAZING.
- 5). MULCH ALL SHRUB MASSES IN ONE CONTINUOUS BED.


ROADSIDE SHRUB PLANTING DETAIL


	DELAWARE		PLANTIN	G DETAI	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	5/31/2017 DATE		
	DEPARTMENT OF TRANSPORTATION	STANDARD NO.	L-1 (2017)	SHT.	1	OF	3	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER

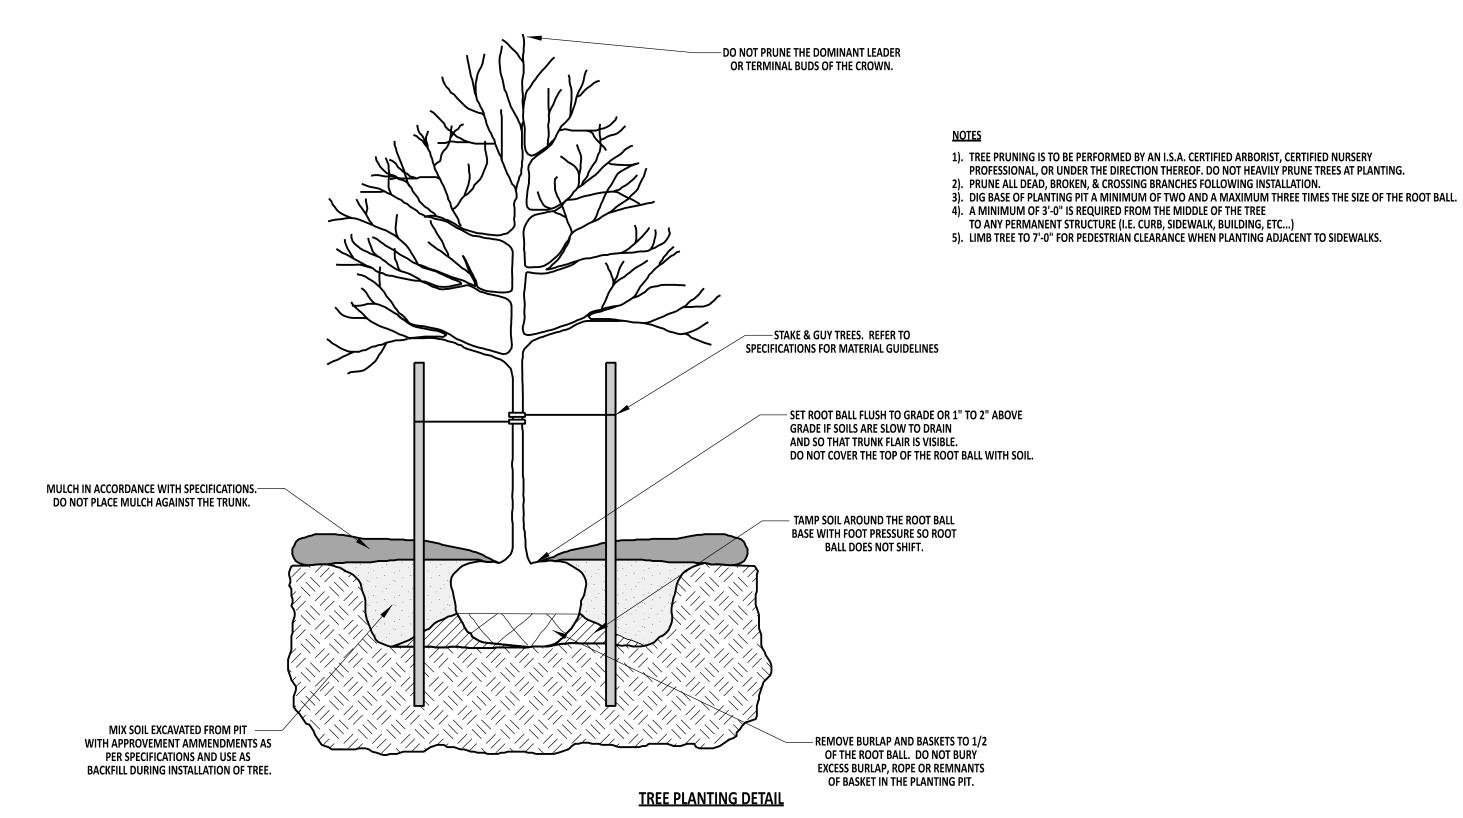

	DELAWARE DEPARTMENT OF TRANSPORTATION		PLANTIN	G DETAII	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	5/31/2017 DATE	
		STANDARD NO.	L-1 (2017)	SHT.	2	OF	3	RECOMMENDED

NOTE:
1). SEE PLANT LIST FOR SPACING (X).




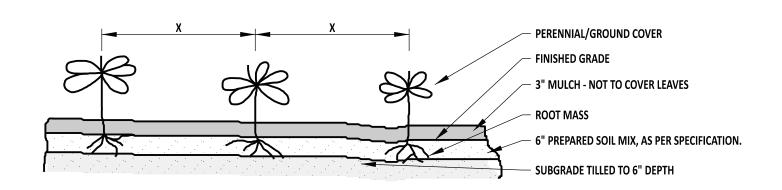


SECTION VIEW


PERENNIAL/GROUNDCOVER PLANTING DETAIL

	DELAWARE DEPARTMENT OF TRANSPORTATION		PLANTIN	G DETAII	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	5/31/2017	
		STANDARD NO.	L-1 (2017)	SHT.	3	OF	3	RECOMMENDED

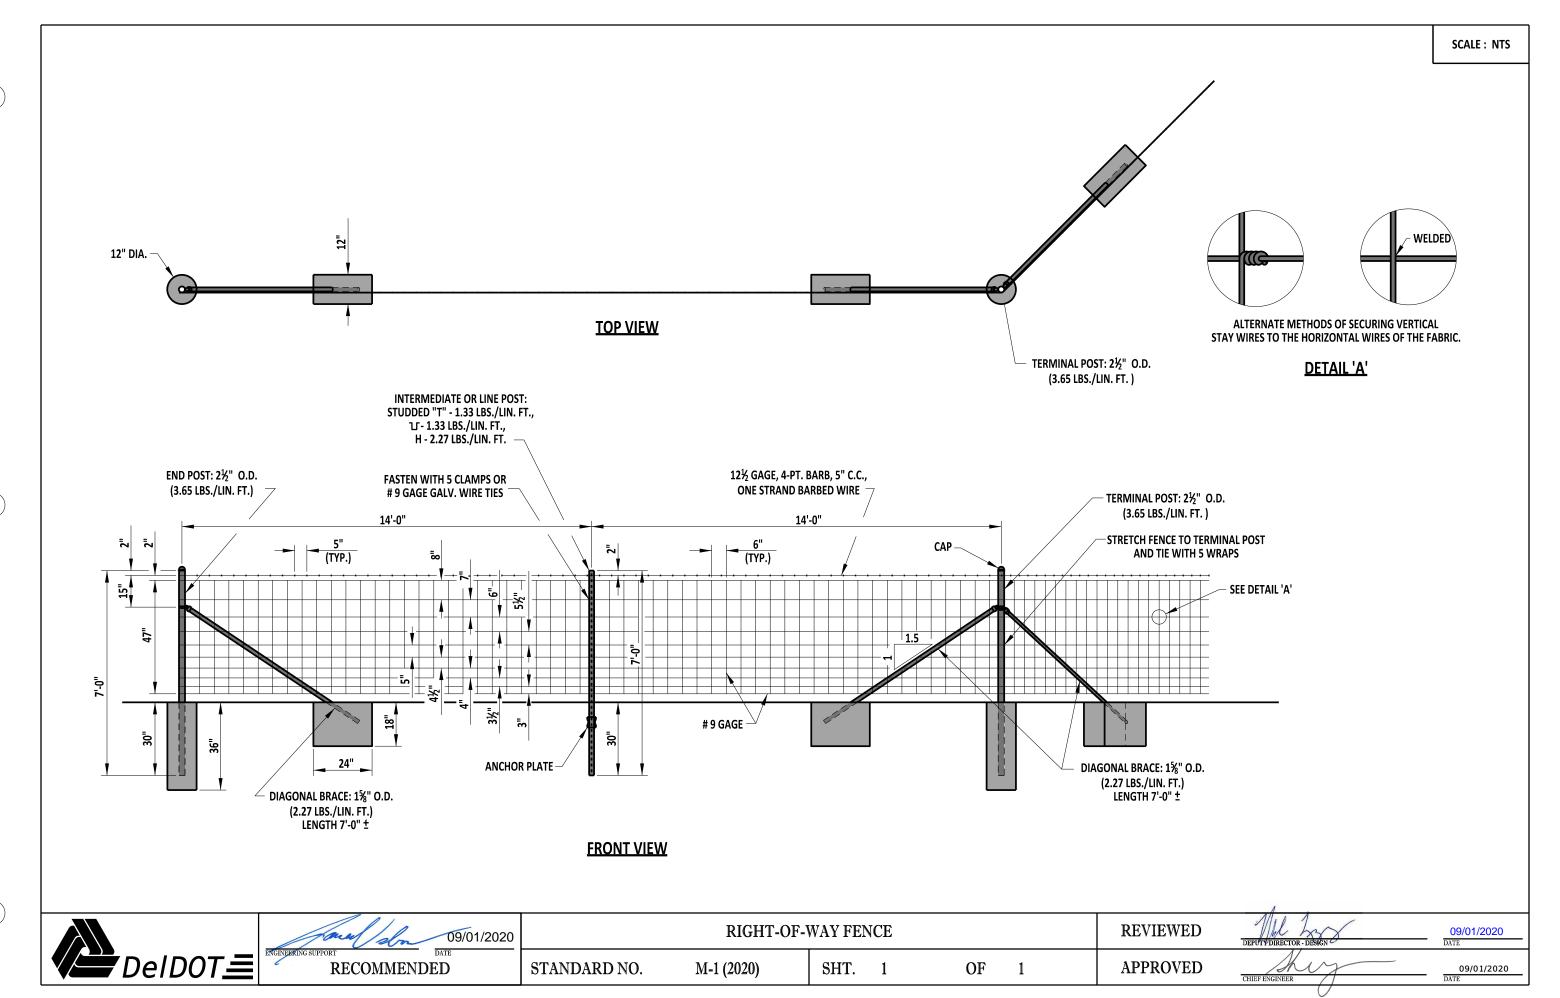


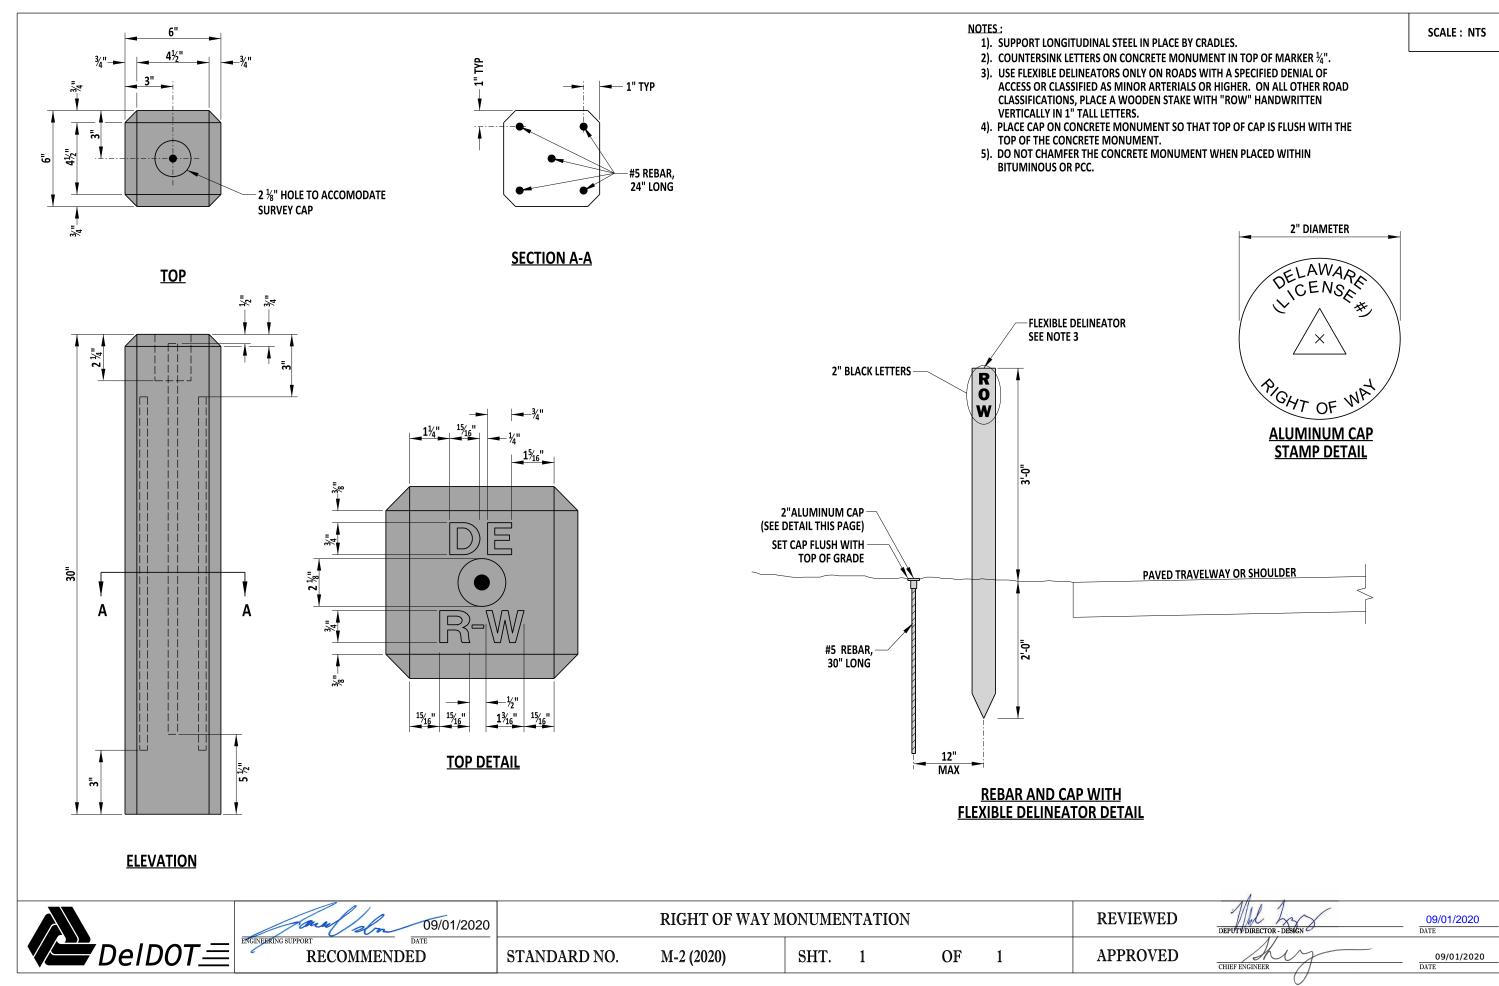




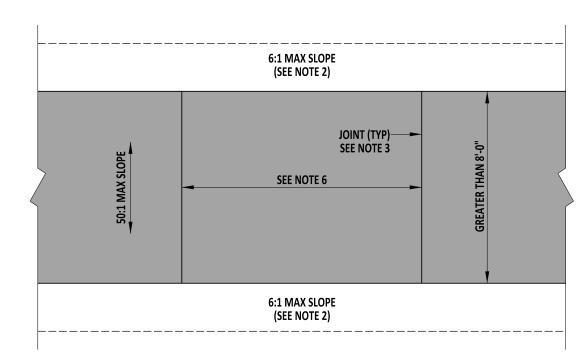


SHARED-USE PATH PLAN

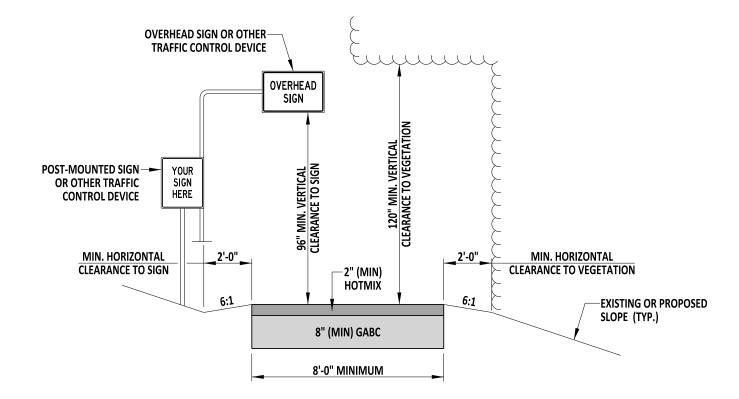

SHARED-USE PATH TYPICAL SECTION

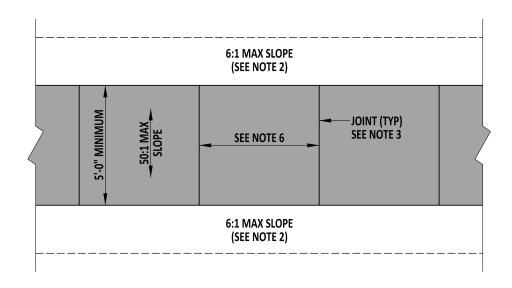


SIDEWALK PLAN

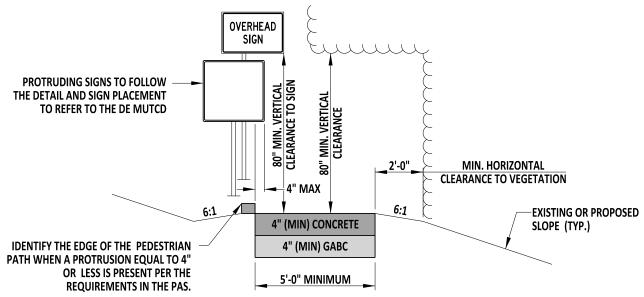



SIDEWALK TYPICAL SECTION


NOTES:


- 1). IF THE SHARED-USE PATH OR SIDEWALK ENDS AT A TRAVELWAY OR RAILROAD CROSSING, INSTALL A PEDESTRIAN CONNECTION AT THE WIDTH OF THE PATH OR SIDEWALK (SEE C-2).
- 2). A 6:1 GRADE IS REQUIRED FOR A MINIMUM OF 2'-0" IMMEDIATELY ADJACENT TO THE SHARED USE PATH OR SIDEWALK.
- 3). FOR SIDEWALKS, PLACE CONSTRUCTION JOINTS EVERY 5' IN ACCORDANCE WITH SECTION 705.3. FOR CONCRETE SHARED-USE PATHS, PLACE CONSTRUCTION JOINTS EVERY 10'.
- 4). PLACE EXPANSION MATERIAL PLACEMENT IN ACCORDANCE WITH SECTION 701.3.
- 5). ON REHABILITATION PROJECTS, WHEN EXISTING OBSTRUCTIONS (FIRE HYDRANT, UTILITY POLE, ETC...) ARE LOCATED IN THE SIDEWALK, MAINTAIN A MINIMUM WIDTH OF 34" AND MAXIMUM LENGTH CONSTRICTION OF 24".
- 6). NOT TO EXCEED 5% OR ADJACENT ROAD GRADE.



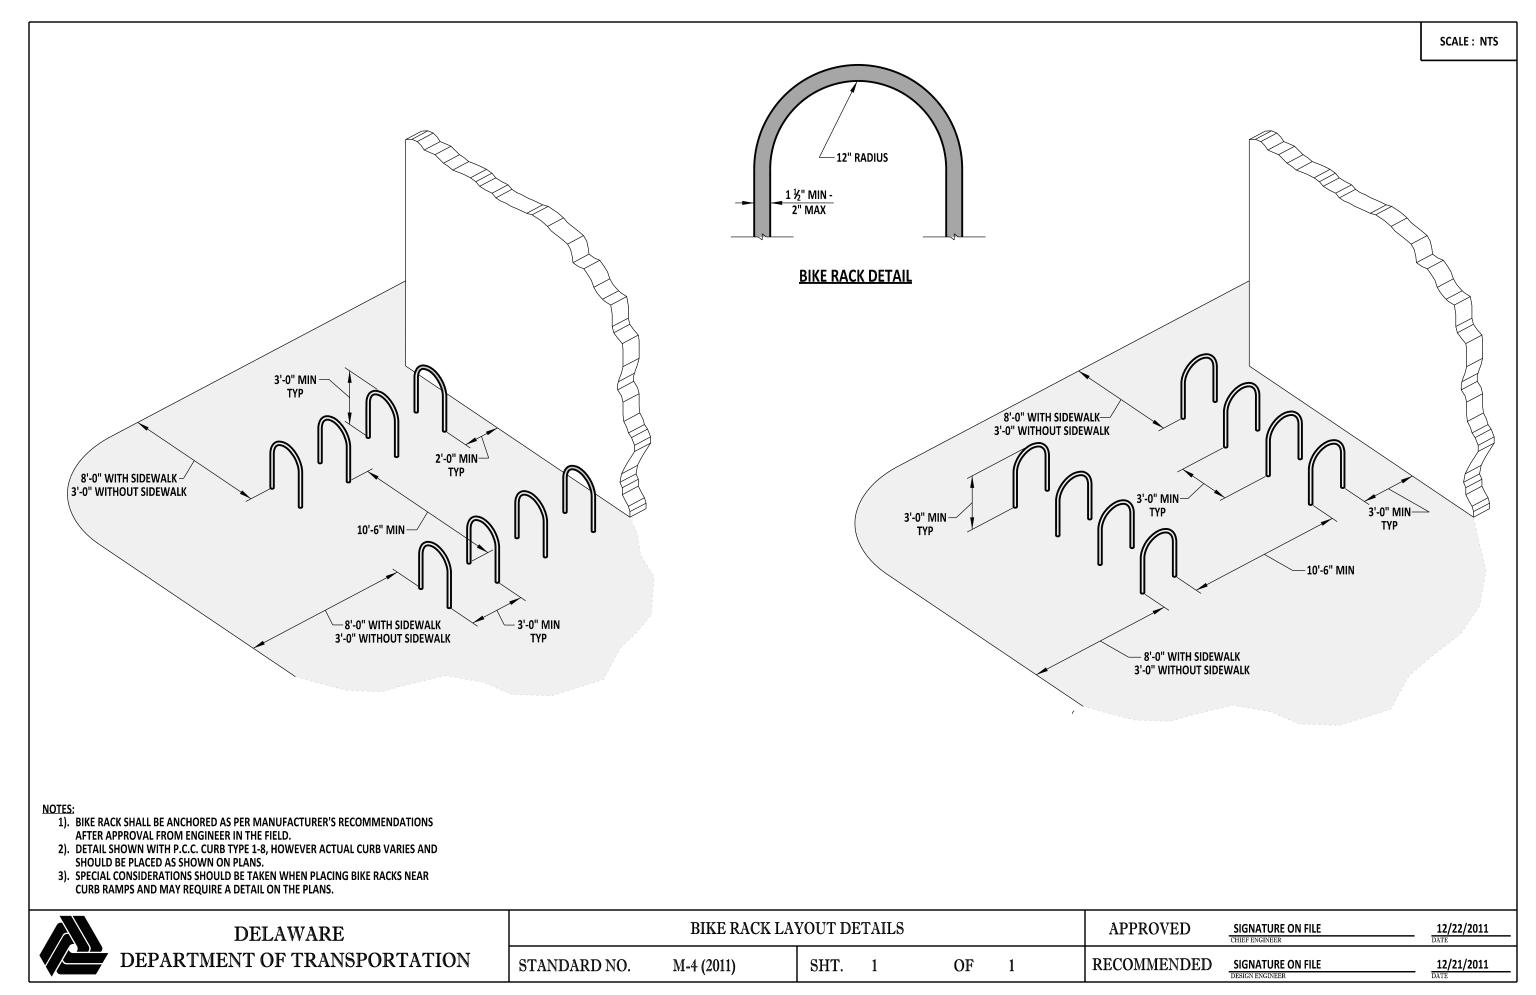

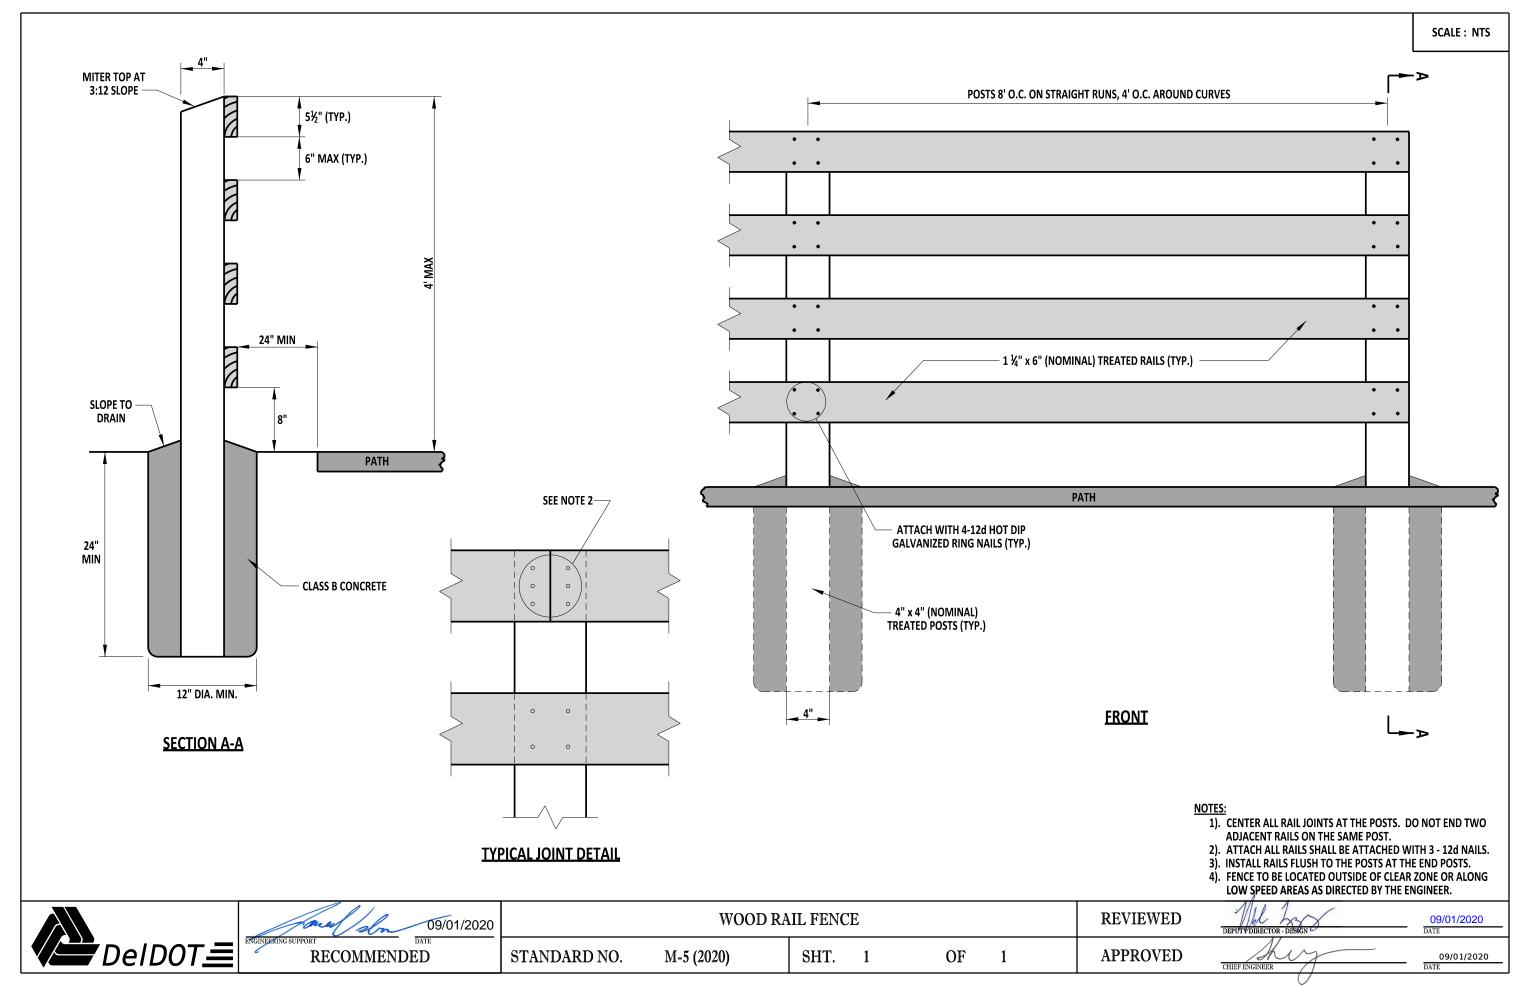

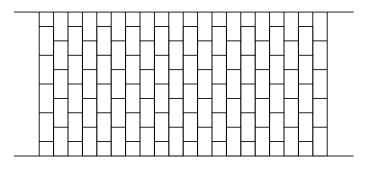

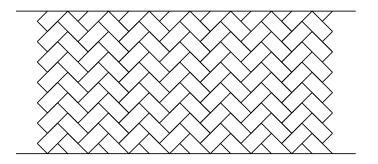


4" x 8" RUNNING BOND PATTERN

4" x 8" HERRINGBONE PATTERN

NOTES:

- 1. CONSTRUCT THE PATTERN SPECIFIED ON THE PLANS. COLOR IS TO BE "BRICK RED" UNLESS OTHERWISE NOTED ON THE PLANS.
- 2. MATERIALS AND PAVEMENT BOX VARY DEPENDING ON PLANS.
- 3. FOR CROSSWALK APPLICATIONS, REFER TO THE DE MUTCD CONTROL DEVICES FOR STRIPING
- THE PATTERNS ABOVE ARE THE PREFERRED PATTERNS AVAILABLE FOR SIDEWALK OR CROSSWALK APPLICATIONS.

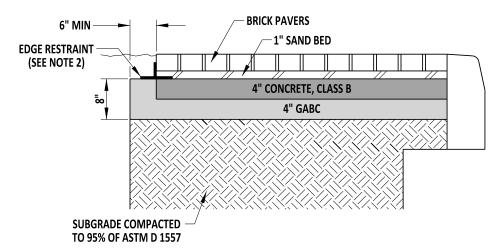

BRICK PAVER SIDEWALK DETAIL

NOTES

- 1. WHEN SIDEWALK IS CONFINED BY A RIGID STRUCTURE ON BOTH SIDES, PLACE EXPANSION JOINT MATERIAL FROM TOP OF BRICK TO BOTTOM OF CONCRETE BASE ON AT LEAST ONE SIDE OF THE SIDEWALK.
- 2. EDGE RESTRAINT TO BE APPROVED BY THE ENGINEER IN THE FIELD AND INSTALLED AS PER MANUFACTURER'S RECOMMENDATIONS.

M-6 (2020)



09/01/2020
RING SUPPORT

RECOMMENDED

STANDARD NO.

PATTERNED HOT-MIX OR CONCRETE & BRICK PAVER

SHT. 1


OF 1

APPROVED


REVIEWED

09/01/2020 DATE


CHIEF ENGINEER

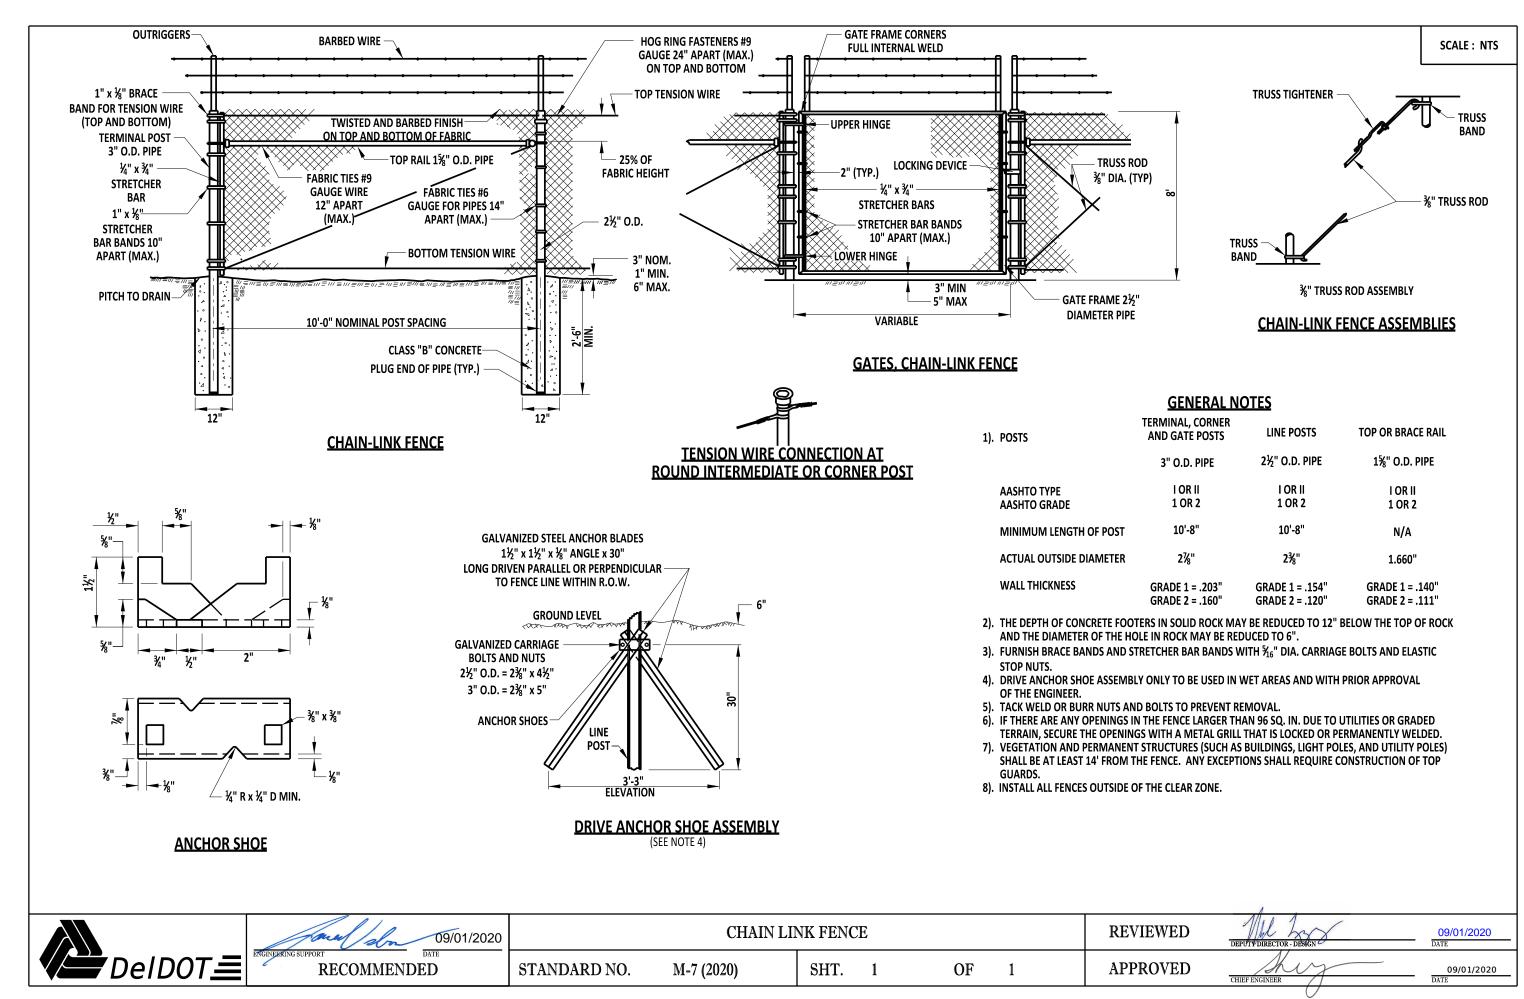

SCALE: NTS

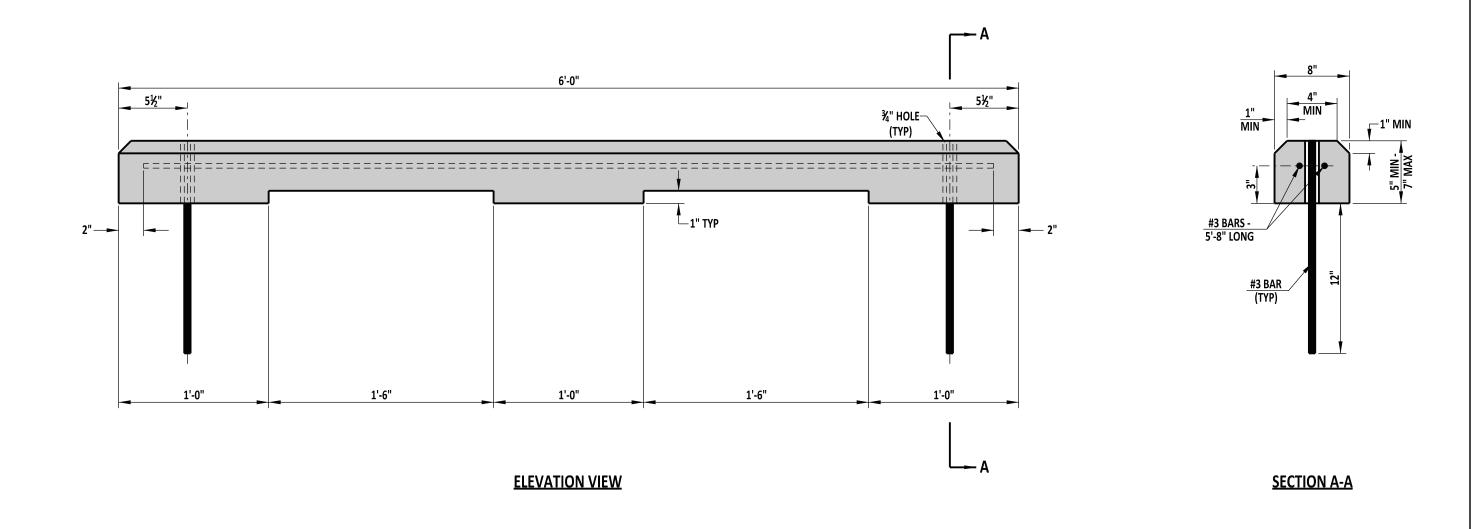

			P.C.C. PARK		APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	12/30/2014 DATE	
		STANDARD NO.	M-8 (2014)	SHT.	1	OF	1	RECOMMENDED

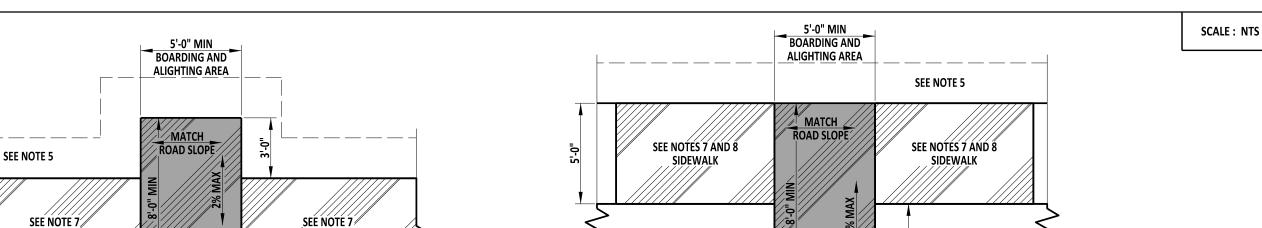

CURB (SEE NOTE 6)

SEE NOTE 5

BUS STOP PAD. TYPE 1

SIDEWALK

* - TO BE USED WHEN THE PAD IS PLACED FLUSH WITH THE

TRAVELWAY AND NO CURB OR SIDEWALK IS INCLUDED

CURB (SEE NOTE 6 & 8)


SIDEWALK


TRAVELWAY/SHOULDER

* - TO BE USED WHEN THE PAD IS PLACED BEHIND CURB AND INCLUDES A SIDEWALK WITHOUT A GRASS STRIP

BUS STOP PAD. TYPE 2

* - TO BE USED WHEN THE PAD IS PLACED BEHIND CURB AND INCLUDES A SIDEWALK WITH A GRASS STRIP

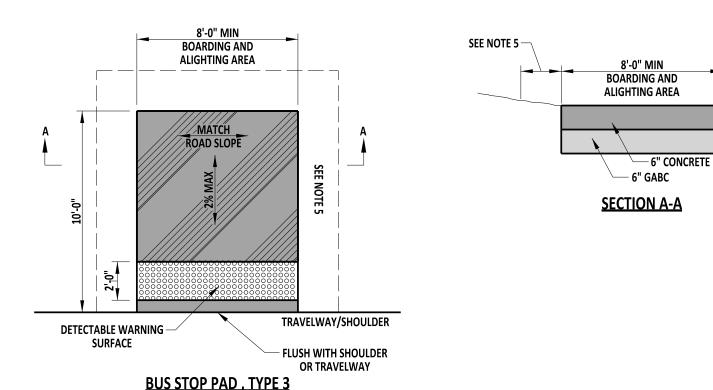





NOTES:


1). BUS STOP PAD LOCATIONS TO BE APPROVED BY BOTH DART AND DELDOT PRIOR TO ANY CONSTRUCTION.

TRAVELWAY/SHOULDER


- 2). REFERENCE THE DE MUTCD FOR GENERAL INFORMATION ON PLACEMENT OF SIGNS.
- 3). SEE CONSTRUCTION PLAN SIGNING AND STRIPING SHEETS FOR SPECIFIC SIGN AND SIGN LOCATION DETAILS.
- 4). TYPICAL BUS STOP PADS MAY BE USED IN CONJUNCTION WITH BUS STOP SHELTER LOCATIONS IN THE EVENT OF LAND CONSTRAINTS AT THE SHELTER LOCATIONS. AN INTERCONNECTING PEDESTRIAN ACCESS PATH MUST EXIST THAT IS ACCESSIBLE TO BUS STOP ALIGHTING AREAS, SHELTERS, PEDESTRIAN CONNECTIONS, CROSSWALKS, AND SIDEWALKS.
- 5). A 6:1 GRADE IS REQUIRED FOR A MINIMUM OF 2'-0" IMMEDIATELY ADJACENT TO THE BUS STOP PAD OR APPROACHING SIDEWALK.
- 6). SEE PLANS FOR CORRECT CURB TYPE. DO NOT DEPRESS CURB
- 7). SEE DETAIL M-3, SHEET 1 OF 1 FOR ADDITIONAL SIDEWALK DETAILS AND REQUIREMENTS.
- 8). THE MAXIMUM RUNNING SLOPE TO TRANSITION THE SIDEWALK TO MEET BUS STOP PAD ELEVATION IS 12:1 (8.3%), HOWEVER, 20:1 (5%) IS PREFERRED. RAMPS ARE ONLY REQUIRED WHEN THE VERTICAL HEIGHT OF THE APPROACHING SIDEWALK DIFFERS FROM THAT OF THE ADJACENT CURB.



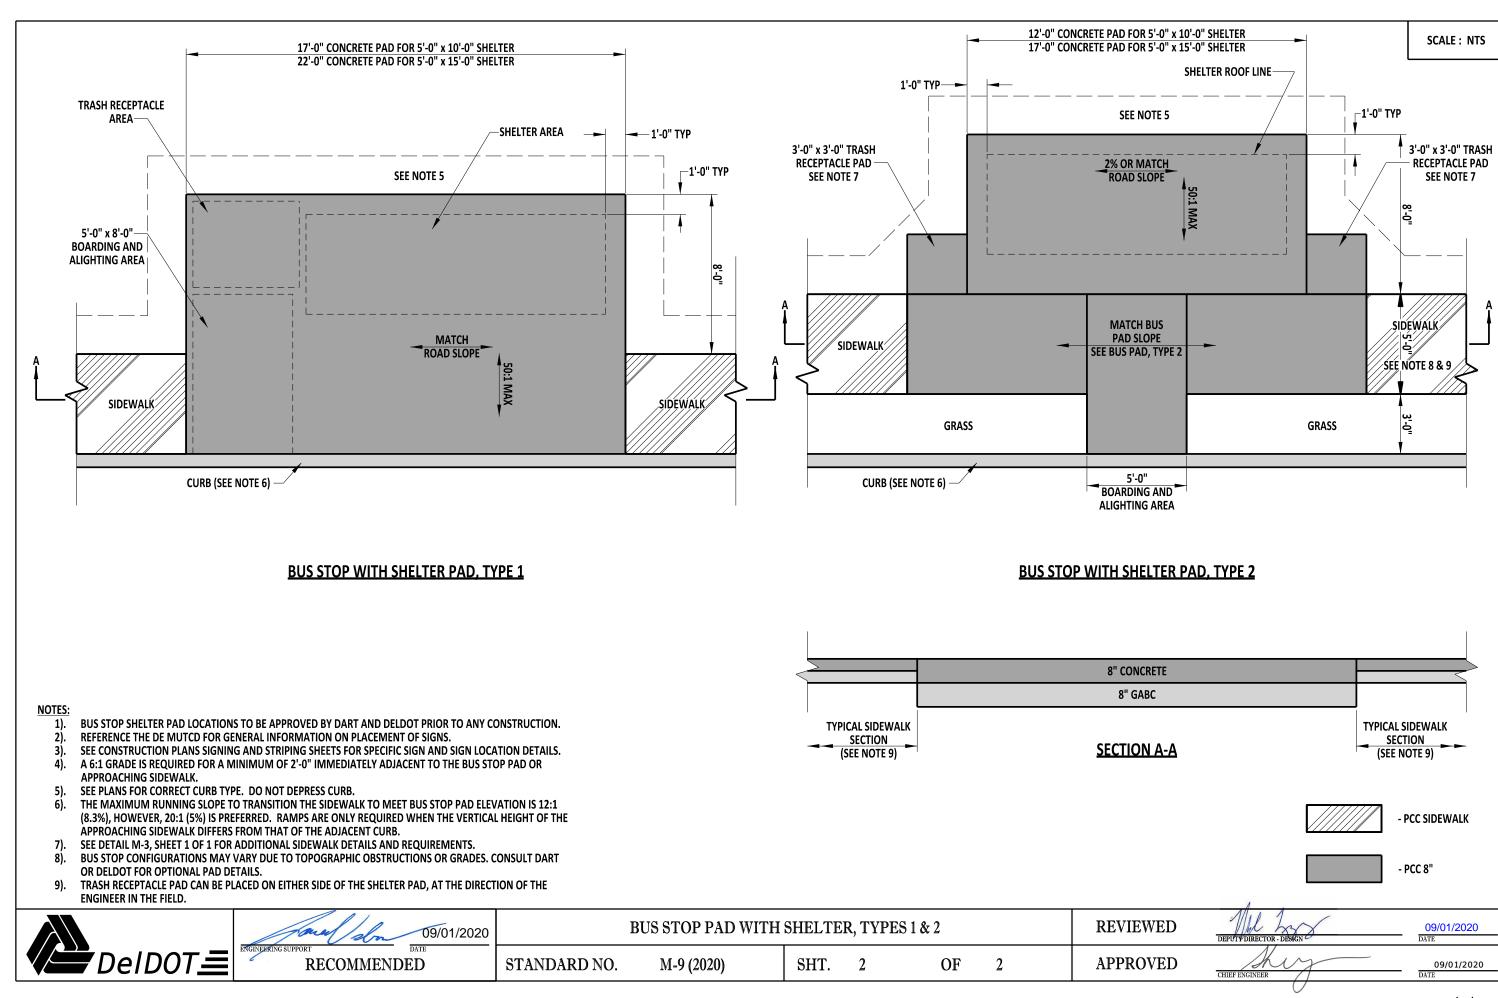


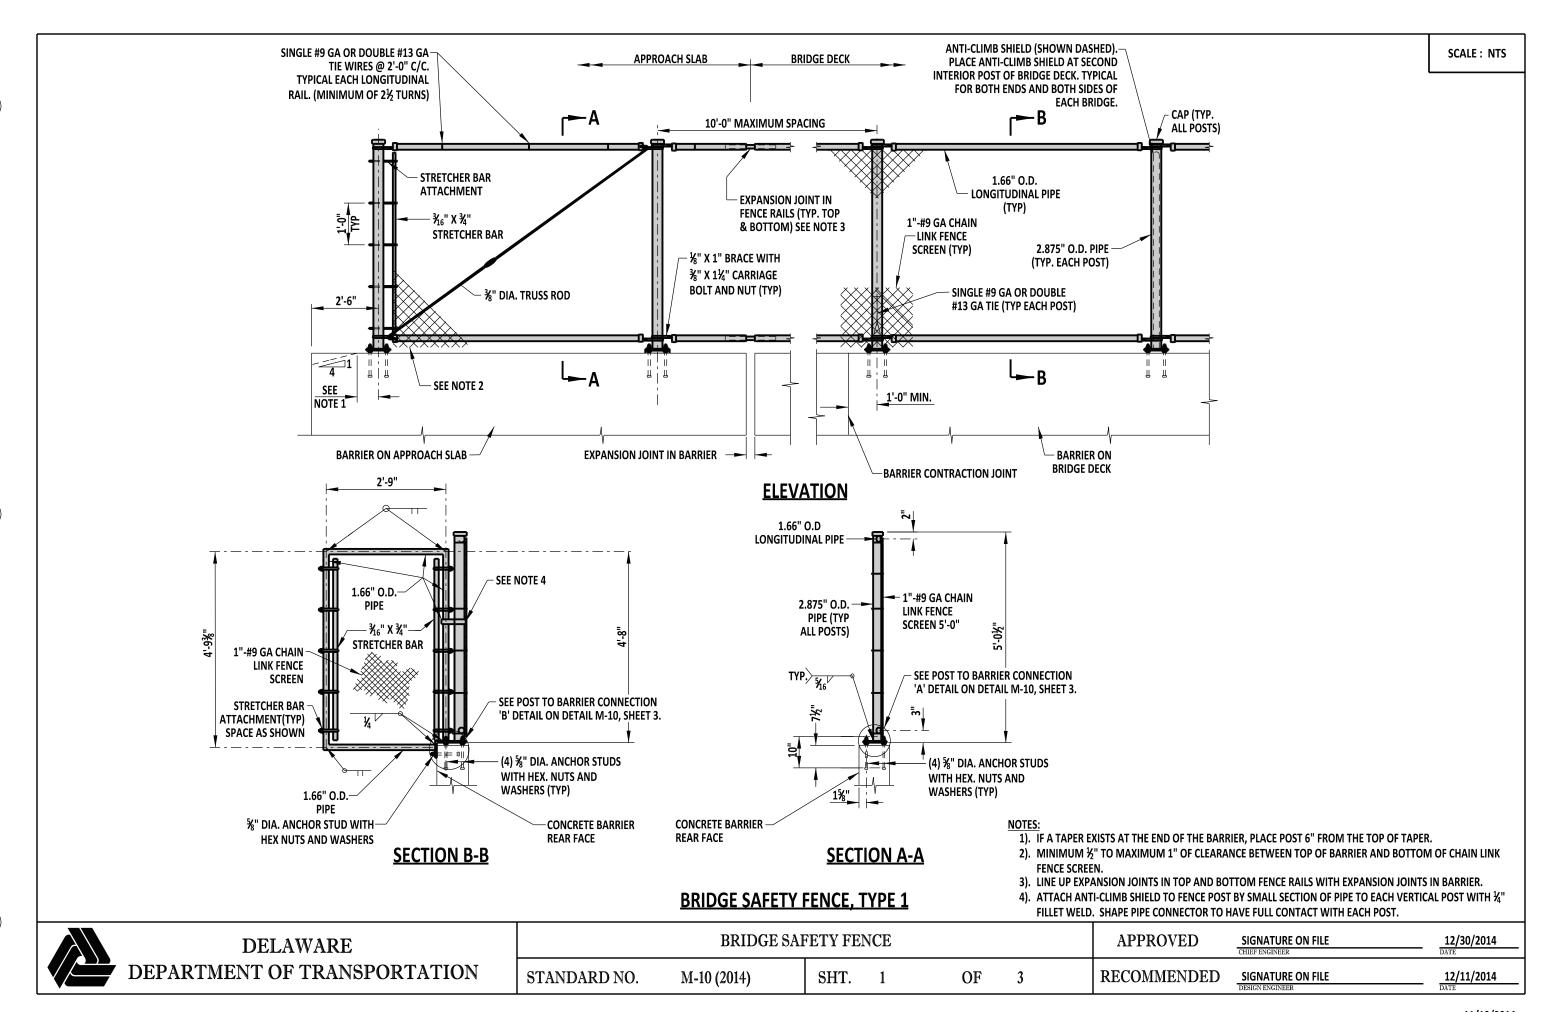



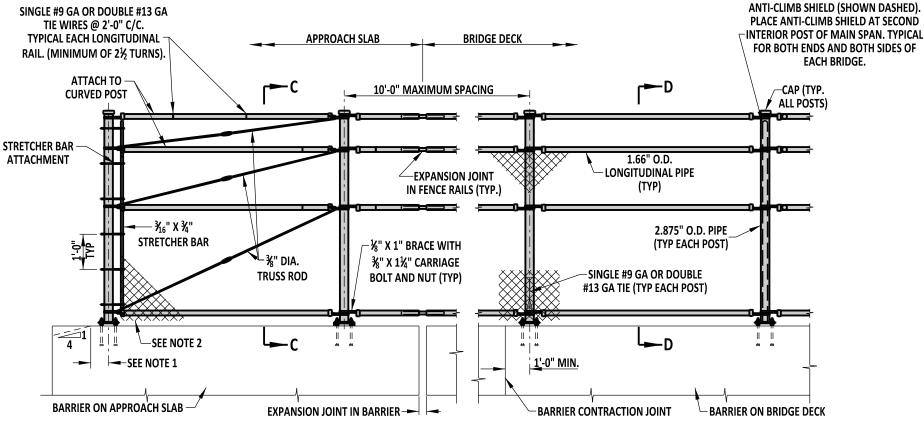

ELEVATION

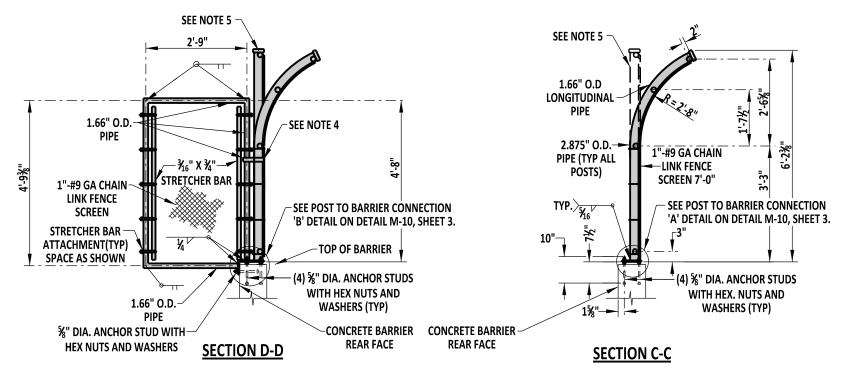

DESIGNER NOTE: BRIDGE SAFETY FENCE, TYPE 2 SHOULD BE USED WHEN A SIDEWALK EXISTS ADJACENT TO THE BARRIER. OTHERWISE, USE BRIDGE SAFETY FENCE, TYPE 1.

- 1). IF A TAPER EXISTS AT THE END OF THE BARRIER, PLACE POST 6" FROM THE TOP OF TAPER.
- 2). MINIMUM ½" TO MAXIMUM 1" OF CLEARANCE BETWEEN TOP OF BARRIER AND BOTTOM OF CHAIN LINK
- 3). LINE UP EXPANSION JOINTS IN TOP AND BOTTOM FENCE RAILS WITH EXPANSION JOINTS IN BARRIER.
- 4). ATTACH ANTI-CLIMB SHIELD TO FENCE POST BY SMALL SECTION OF PIPE TO EACH VERTICAL POST WITH ½" FILLET WELD. SHAPE PIPE CONNECTOR TO HAVE FULL CONTACT WITH EACH POST.
- 5). WELD ADDITIONAL STRAIGHT POST TO CURVED POST AT SECOND INTERIOR POST OF MAIN SPAN. (TYPICAL FOR BOTH ENDS OF THE BRIDGE.)



STANDARD NO. M-10 (2014)

BRIDGE SAFETY FENCE

BRIDGE SAFETY FENCE, TYPE 2

SHT. 2

OF


3


APPROVED RECOMMENDED SIGNATURE ON FILE


SIGNATURE ON FILE

12/30/2014 DATE

12/11/2014 DATE

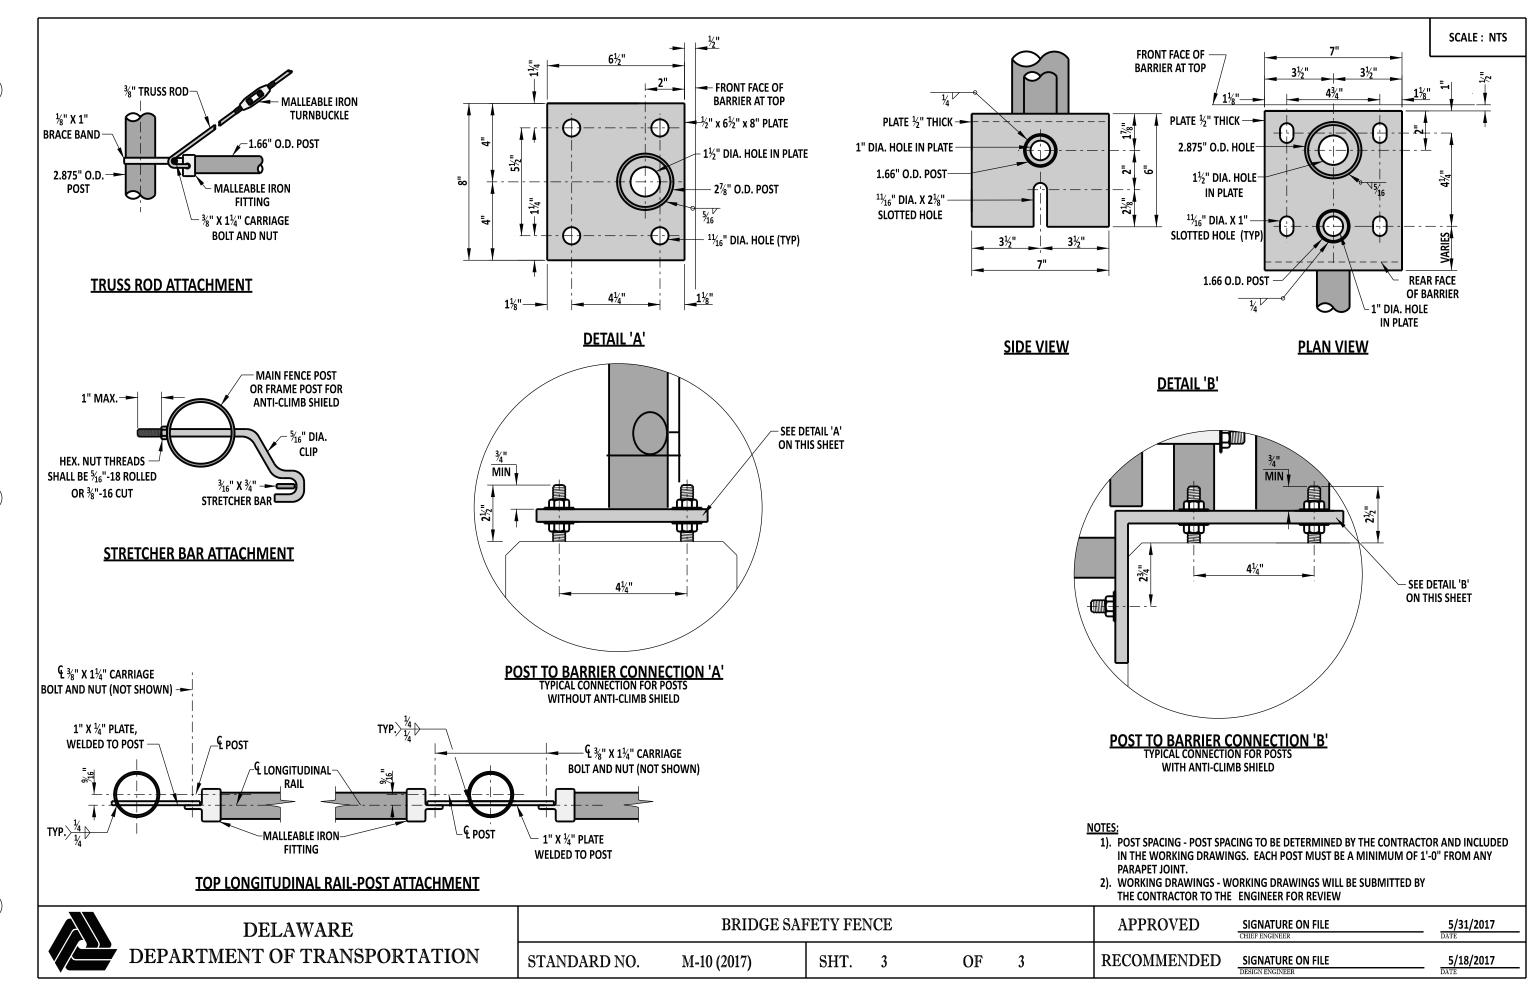

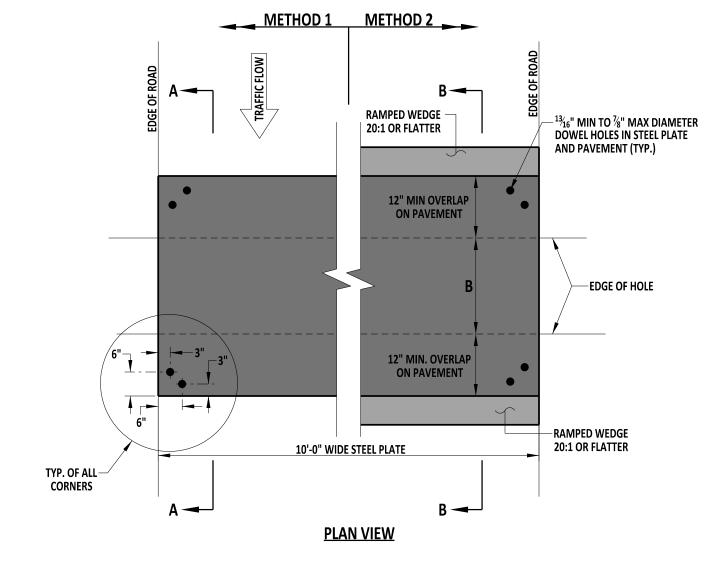

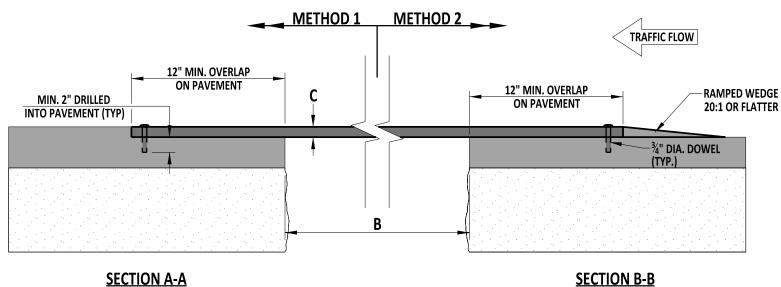



В	С
TRENCH WIDTH	MIN. PLATE THICKNESS
1'-0"	½ "
2'-0"	3/4"
3'-0"	%"
4'-0"	1"
5-'0"	11/%"
6'-0"	1¼"


BASED ON HL-93 TRUCK LOAD

NOTES:

- 1. USE OF STEEL PLATES TO BE APPROVED BY THE DEPARTMENT AND IS NOT PERMITTED BETWEEN NOVEMBER 1ST AND MARCH 31ST.
- 2. STEEL PLATE BRIDGING ON FREEWAYS AND EXPRESSWAYS IS STRICTLY PROHIBITED.
- 3. PROVIDE STEEL PLATES AND DOWELS CONFORMING TO ASTM A36 STANDARDS.
- 4. ADEQUATELY SHORE THE TRENCH IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS TO SUPPORT THE **BRIDGING AND TRAFFIC LOADS.**
- 5. SECURE BRIDGING AGAINST DISPLACEMENT BY USING ADJUSTABLE CLEATS, SHIMS, OR OTHER DEVICES.
- 6. USE OF STEEL PLATE BRIDGING IS NOT TO EXCEED FOUR (4) CONSECUTIVE WORKING DAYS IN ANY GIVEN WEEK AND NOT LEFT IN PLACE OVER THE WEEKEND, UNLESS DIRECTED BY THE ENGINEER IN THE FIELD.
- 7. THE CONTRACTOR IS RESPONSIBLE FOR MAINTENANCE OF STEEL PLATES, SHORING, ASPHALT CONCRETE RAMPS, AND ENSURING THEY MEET ALL MINIMUM SPECIFICATIONS. DEFORMATIONS OF ANY KIND ARE NOT ACCEPTABLE ON STEEL PLATES. EXAMPLES OF DEFORMATIONS COULD BE, BUT NOT LIMITED TO, ANY OF THE FOLLOWING: FREE FROM ANY CLIPS, CHAINS, ATTACHMENTS, WELDMENTS, SURFACE IRREGULARITIES, ETC.
- 8. A STRUCTURE DESIGN IS REQUIRED FOR TRENCH WIDTHS GREATER THAN 6'-0". SUBMIT DESIGN TO THE **DEPARTMENT FOR APPROVAL.**
- 9. INSTALL STEEL PLATE BRIDGING AND SHORING USING EITHER OF THE METHODS BELOW: METHOD 1:FOR SPEEDS GREATER THAN 45 MPH, MILL THE PAVEMENT TO A DEPTH EQUAL TO THE THICKNESS OF THE PLATE AND TO A WIDTH AND LENGTH EQUAL TO THE DIMENSION OF THE PLATE. BUTT SUBSEQUENT PLATES TO EACH OTHER. ATTACH THE PLATE TO THE ROADWAY BY A MINIMUM OF TWO DOWELS PRE-DRILLED INTO EACH CORNER OF THE PLATE AND DRILLED 2" INTO THE PAVEMENT AS SHOWN ON THIS DETAIL.
- METHOD 2: FOR SPEEDS 45 MPH OR LESS, ATTACH THE PLATE TO THE ROADWAY BY A MINIMUM OF TWO DOWELS PRE-DRILLED INTO EACH CORNER OF THE PLATE AND DRILLED 2" INTO THE PAVEMENT AS SHOWN IN ON THIS DETAIL. BUTT SUBSEQUENT PLATES TO EACH OTHER. USE COMPACTED BITUMINOUS TEMPORARY ROADWAY MATERIAL (TRM) TO FORM A RAMPED WEDGE WITH A MAXIMUM SLOPE OF 5% AND A MINIMUM TAPER LENGTH OF 20" TO COVER ALL EDGES OF STEEL
- 10. FOR BOTH METHODS, WHEN THE STEEL PLATES ARE REMOVED, BACKFILL THE DOWEL HOLES IN THE PAVEMENT WITH EITHER GRADED FINES OF ASPHALT CONCRETE MIX, CONCRETE SLURRY, OR EQUIVALENT SLURRY TO THE SATISFACTION OF THE ENGINEER.
- 11. PROVIDE STEEL PLATES WITH A SURFACE THAT IS MANUFACTURED WITH A MINIMUM NOMINAL COEFFICIENT OF FRICTION OF 0.35 AT THE TIME OF PLACEMENT.



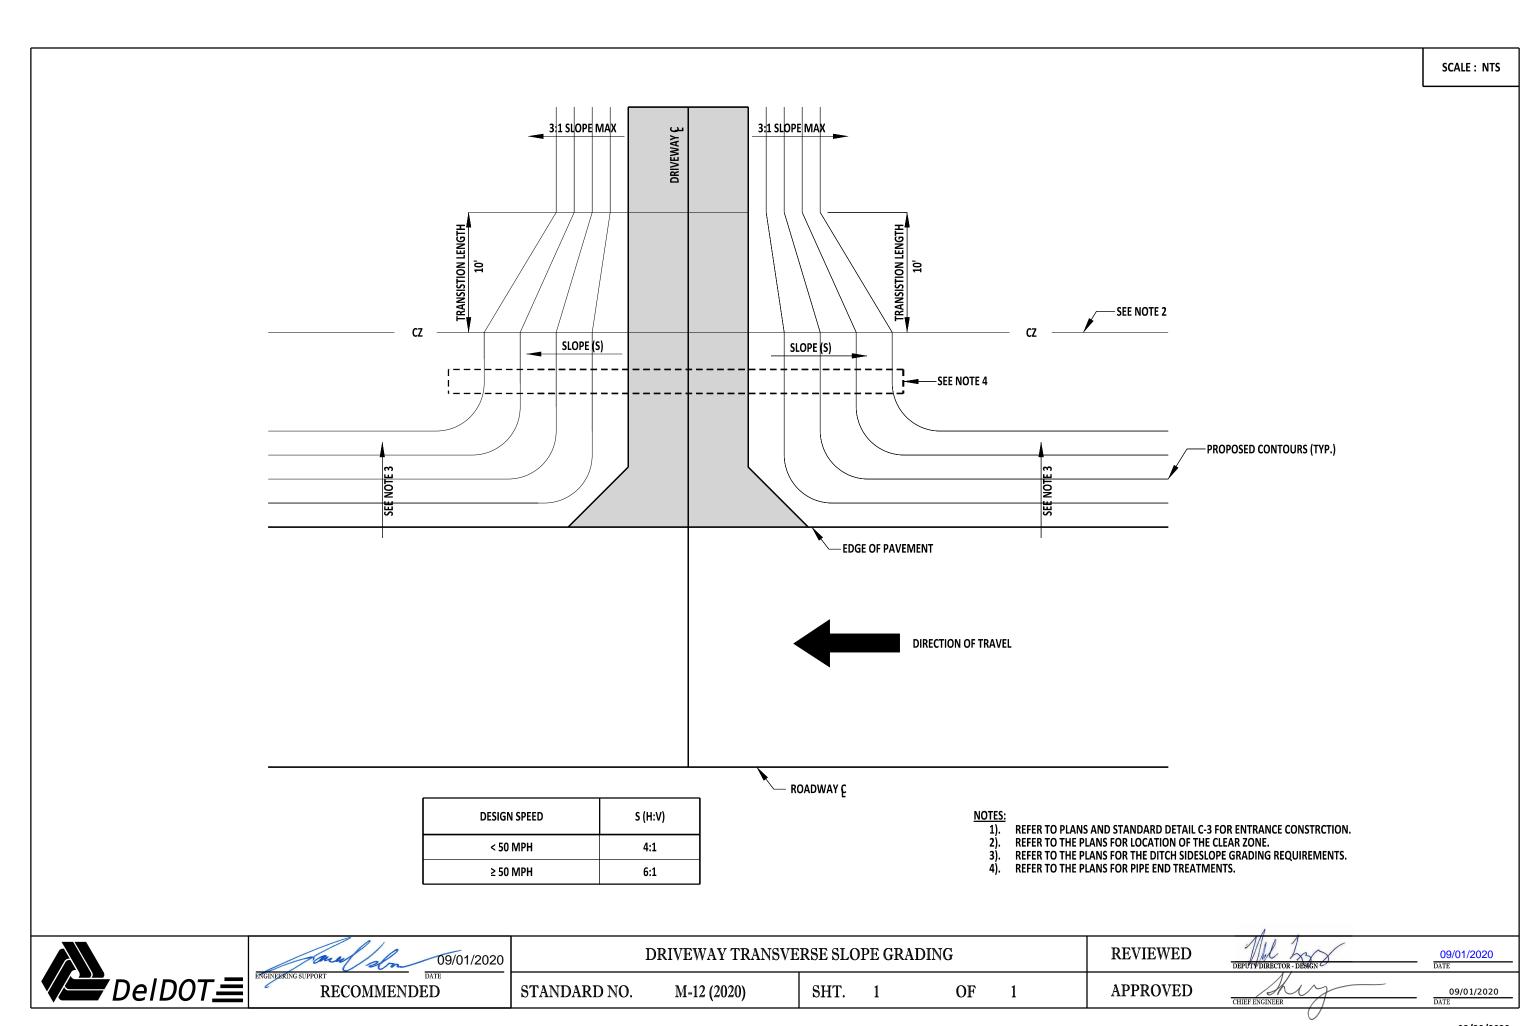

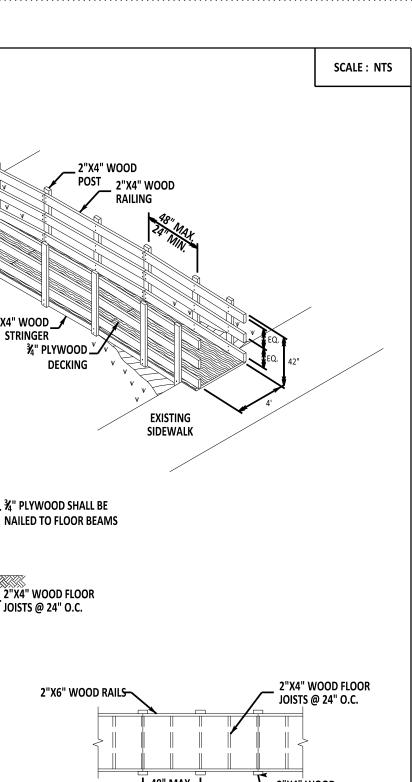

POST


2"X4" WOOD

STRINGER

¾" PLYWOOD **DECKING**

2"X4" WOOD FLOOR

JOISTS @ 24" O.C.



2"-4" SEPARATION FROM_

2"X6" WOOD RAILS SHALL

THE WOOD FLOOR

EXISTING SIDEWALK

GRASS AREA

ISOMETRIC VIEW

CONTRACTOR SHALL CUT NECESSARY DEPTH OF SOIL TO ALLOW BEGINNING AND ENDING 8' SECTIONS OF BOARDWALK TO BECOME FLUSH WITH EXISTING SIDEWALK

- 1. MAXIMUM ALLOWABLE RUNNING SLOPE NOT TO EXCEED 5%. MAXIMUM ALLOWABLE CROSS SLOPE NOT TO EXCEED 2% AND VERTICAL SURFACES NOT TO EXCEED 1/4". FURTHER GUIDANCE IN ACCORDANCE WITH THE LATEST VERSION OF THE PEDESTRIAN ACCESSIBILITY STANDARDS FOR FACILITIES IN THE PUBLIC RIGHT-OF-WAY.
- 2. MAINTAIN A UNIFORM MATERIAL THAT IS FIRM, STABLE, AND SLIP RESISTANT.

48" MAX. 24" MIN. _ 2"X4" WOOD **POSTS**

PLAN VIEW

TEMPORARY SIDEWALK DETAIL - TYPE 2

'DeIDOT<u></u>

■

ITEM 813503.

1. PROVIDE 4'-0" WIDE TEMPORARY PATHWAY, SUPPLY CONCRETE, HOTMIX, COLD

2. MAINTAIN A UNIFORM MATERIAL THAT IS FIRM, STABLE, AND SLIP RESISTANT.

3. IN THE EVENT THAT THE WALKING SURFACE OF THE TEMPORARY SIDEWALK IS LOCATED MORE THAN 30" FROM GRADE AT ANY POINT ALONG THE PROPOSED

ACCESSIBILITY STANDARDS FOR FACILITIES IN THE PUBLIC RIGHT-OF-WAY.

5. ANY REQUIRED EXCAVATION TO CONSTRUCT THE PATHWAY IS INCIDENTAL TO

PATH, PROVIDE TYPE 2 TEMPORARY SIDEWALK.

PATCH OR MILLINGS TO A MINIMUM DEPTH OF 4", FLUSH WITH EXISTING GRADE.

4. MAXIMUM ALLOWABLE RUNNING SLOPE NOT TO EXCEED 5%. MAXIMUM ALLOWABLE

FURTHER GUIDANCE IN ACCORDANCE WITH THE LATEST VERSION OF THE PEDESTRIAN

6. COST FOR SEEDING REQUIRED TO RESTORE THE AREA IS PAYABLE BY THE DEPARTMENT.

CROSS SLOPE NOT TO EXCEED 2% AND VERTICAL SURFACES NOT TO EXCEED 1/4".

EXISTING GRADE -

RECOMMENDED

4'-0"(MIN.)

TEMPORARY PEDESTRIAN PATHWAY N.T.S.

09/01/2020

STANDARD NO. M-13 (2020)

PCC, BITUMINOUS PAVEMENT, TEMPORARY ROADWAY MATERIAL (TRM) OR COMPACTED MATERIAL IN ACCORDANCE TO SECTION 301.

TEMPORARY PEDESTRIAN PATHWAY

SHT. 1


OF


APPROVED

REVIEWED

CHIEF ENGINEER


09/01/2020

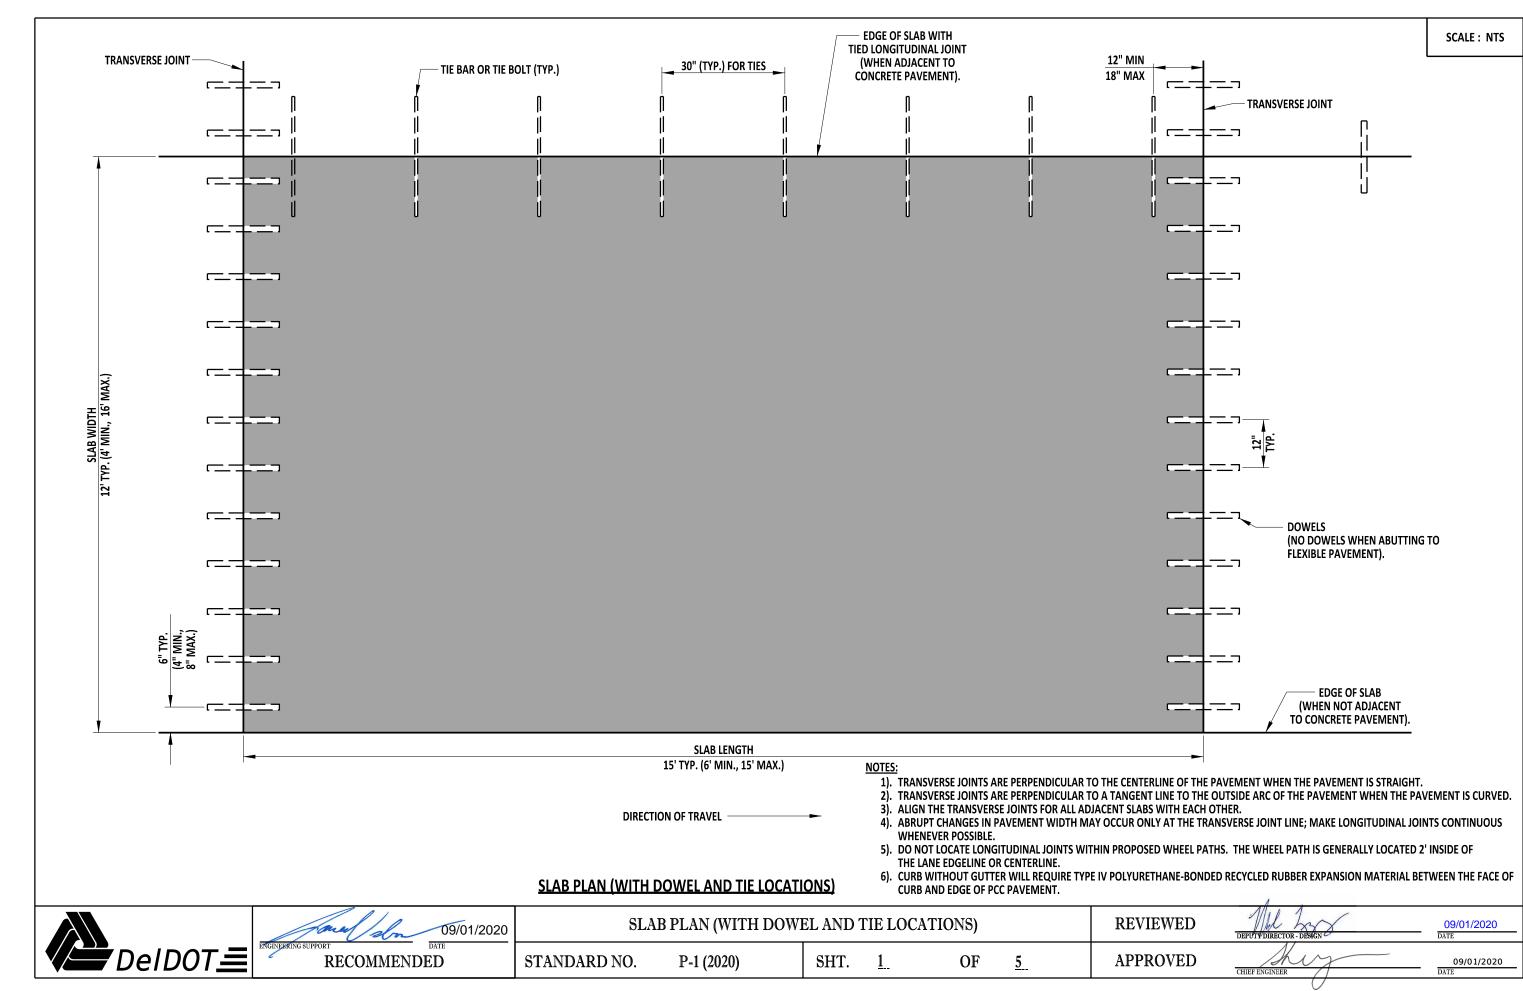

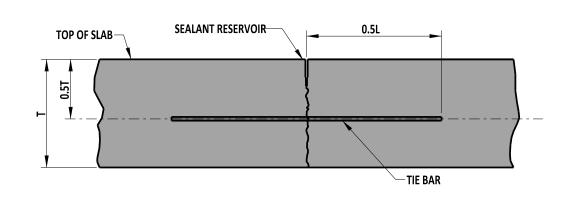


-SEALANT RESERVOIR TOP OF SLAB **CONSTRUCTION JOINT** 0.5T ot hook bolt (TIE BAR OR W BOLT MAY ALSO BE USED)

LONGITUDINAL CONSTRUCTION JOINT DETAIL




SCALE: NTS

LONGITUDINAL SAW-CUT JOINT DETAIL

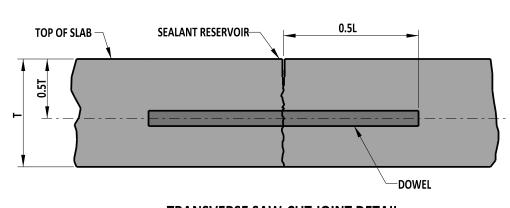

HOT-POURED **JOINT SEALANT** TOP OF SLAB ⅓" SAW CUT

TRANSVERSE SAW-CUT JOINT DETAIL

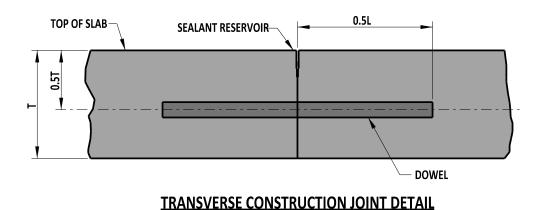

SEALANT RESERVOIR DETAIL-TRANSVERSE AND LONGITUDINAL JOINT

* - 0.3T (10" PCC PAVEMENT) 0.4T (12" PCC PAVEMENT)

NOTES:

(DELETE AT CONTRUCTION JOINTS)

- AS DIMENSIONED, THE WIDTH OF THE TRANSVERSE SEALANT RESERVOIR IS APPLICABLE WHEN THE TEMPERATURE OF THE PAVEMENT SURFACE IS BETWEEN 60°F AND 80°F. WHEN THE TEMPERATURE IS BELOW 60°F, CUT THE SEALANT RESERVOIR $\frac{1}{16}$ " WIDER. WHEN THE TEMPERATURE IS ABOVE 80°F, CUT THE SEALANT RESERVOIR 1/16" NARROWER.
- "T" REFERS TO THE ACTUAL CONSTRUCTED SLAB THICKNESS.
- THE TOLERANCE ON ALL JOINT SEALANT DETAIL DIMENSIONS IS PLUS $\frac{1}{16}$ ", MINUS 0".
- CONSTRUCT THE TOP EDGES OF THE CONTACT SURFACES OF THE SEALANT MATERIAL ON BOTH SIDES OF THE JOINT RESERVOIR TO THE SAME ELEVATION.
- PLACE TRANSVERSE JOINT MATERIAL BEFORE LONGITUDINAL JOINT MATERIAL; PLACE TRANSVERSE JOINT MATERIAL ACROSS THE FULL WIDTH OF ALL ADJACENT PCC PAVEMENT SLABS.
- PLACE LONGITUDINAL JOINT MATERIAL WITHOUT GAPS WHENEVER INTERRUPTED BY THE TRANSVERSE JOINT MATERIAL.
- TRANSVERSE JOINT SEAL TO BE RECESSED $\frac{3}{16}$ " TO $\frac{5}{16}$ " BELOW THE TOP OF THE SLAB.
- USE KEYWAY WHEN HOOK BOLT, TIE BAR, OR W BOLT IS NOT USED.

JOINT AND SEALANT DETAILS

JOINT AND SEALANT



faul den	09/01/2020
NGINEERING SUPPORT	DATE
RECOMMEND	ED

09/01/2020	
ATE	
D	(

STANDARD NO.

P-1 (2020)

SHT. 2

OF

5


APPROVED


REVIEWED

CHIEF ENGINEER


09/01/2020

08/20/2020

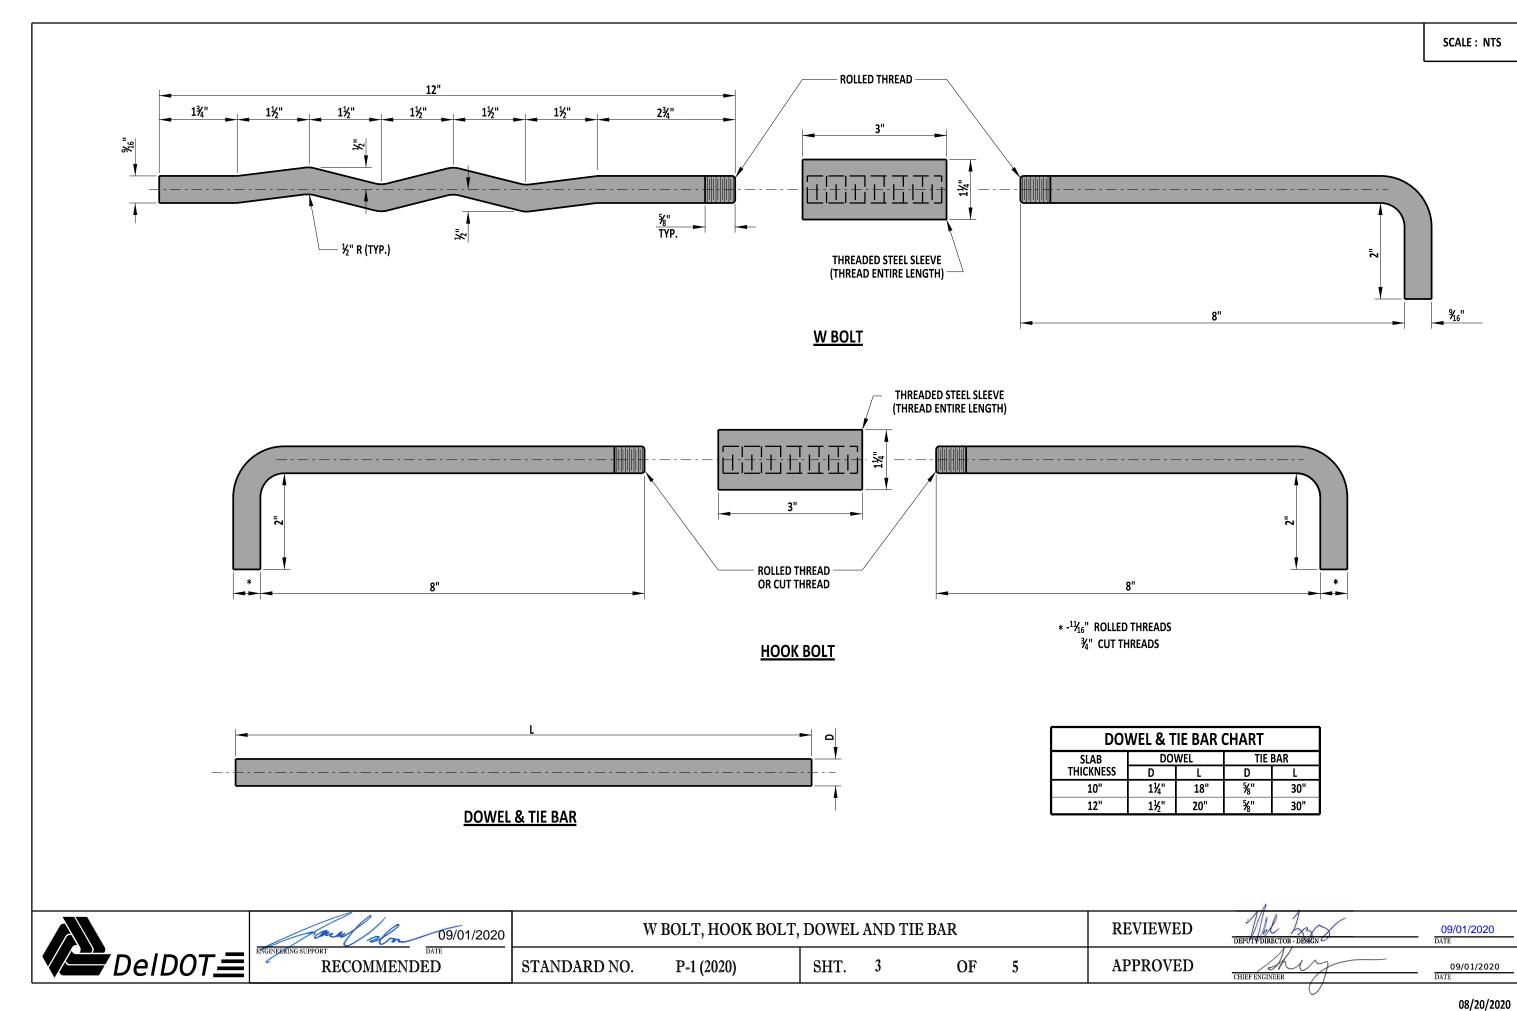


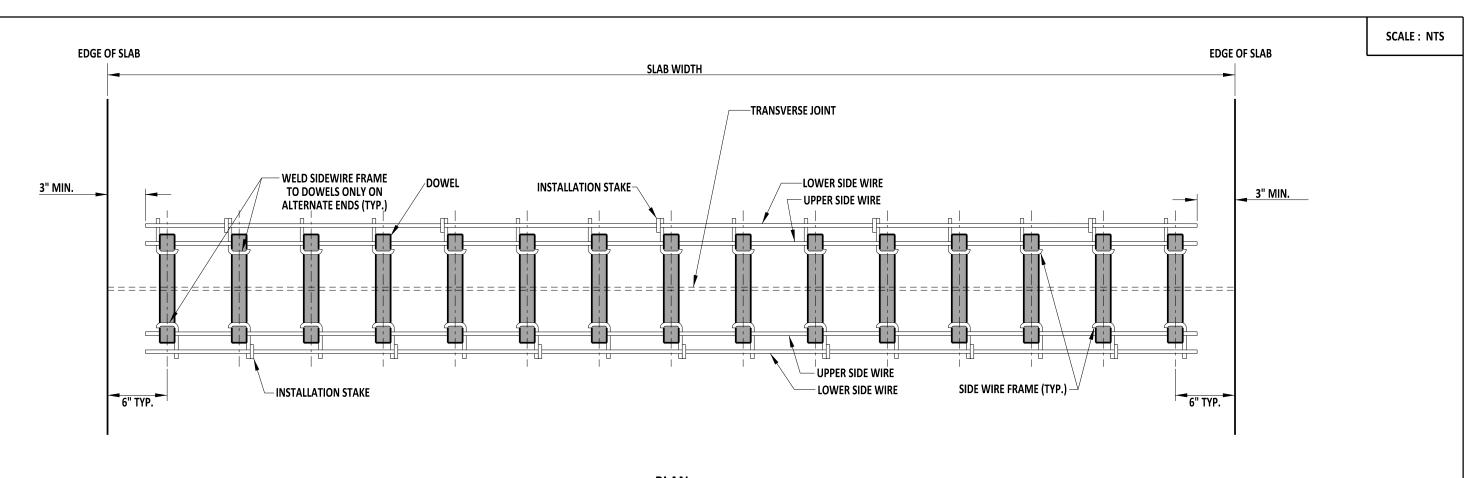




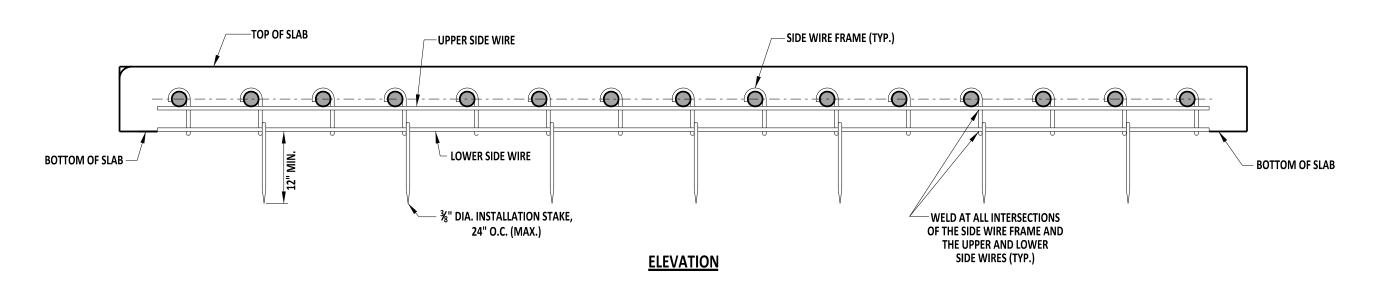

DOWEL SUPPORT BASKET






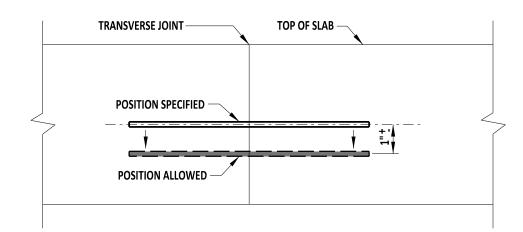


TRANSVERSE JOINT TOP OF SLAB POSITION SPECIFIED POSITION ALLOWED


VERTICAL TRANSLATION

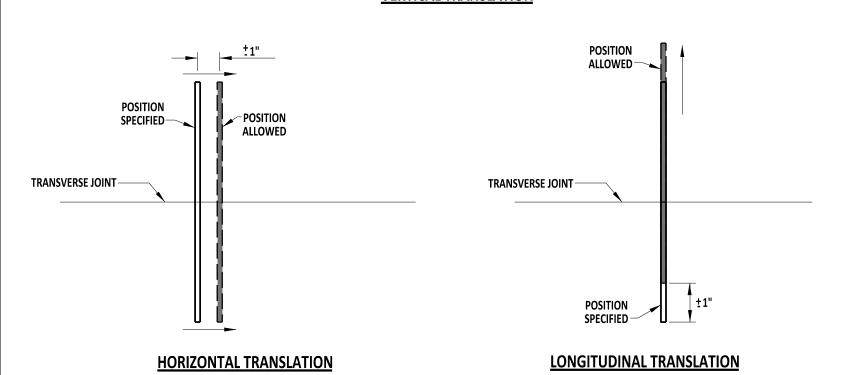



VERTICAL ROTATION

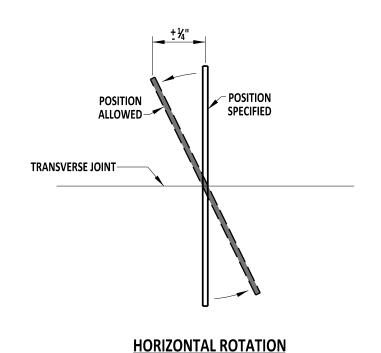


DOWEL & TIE BAR PLACEMENT TOLERANCES



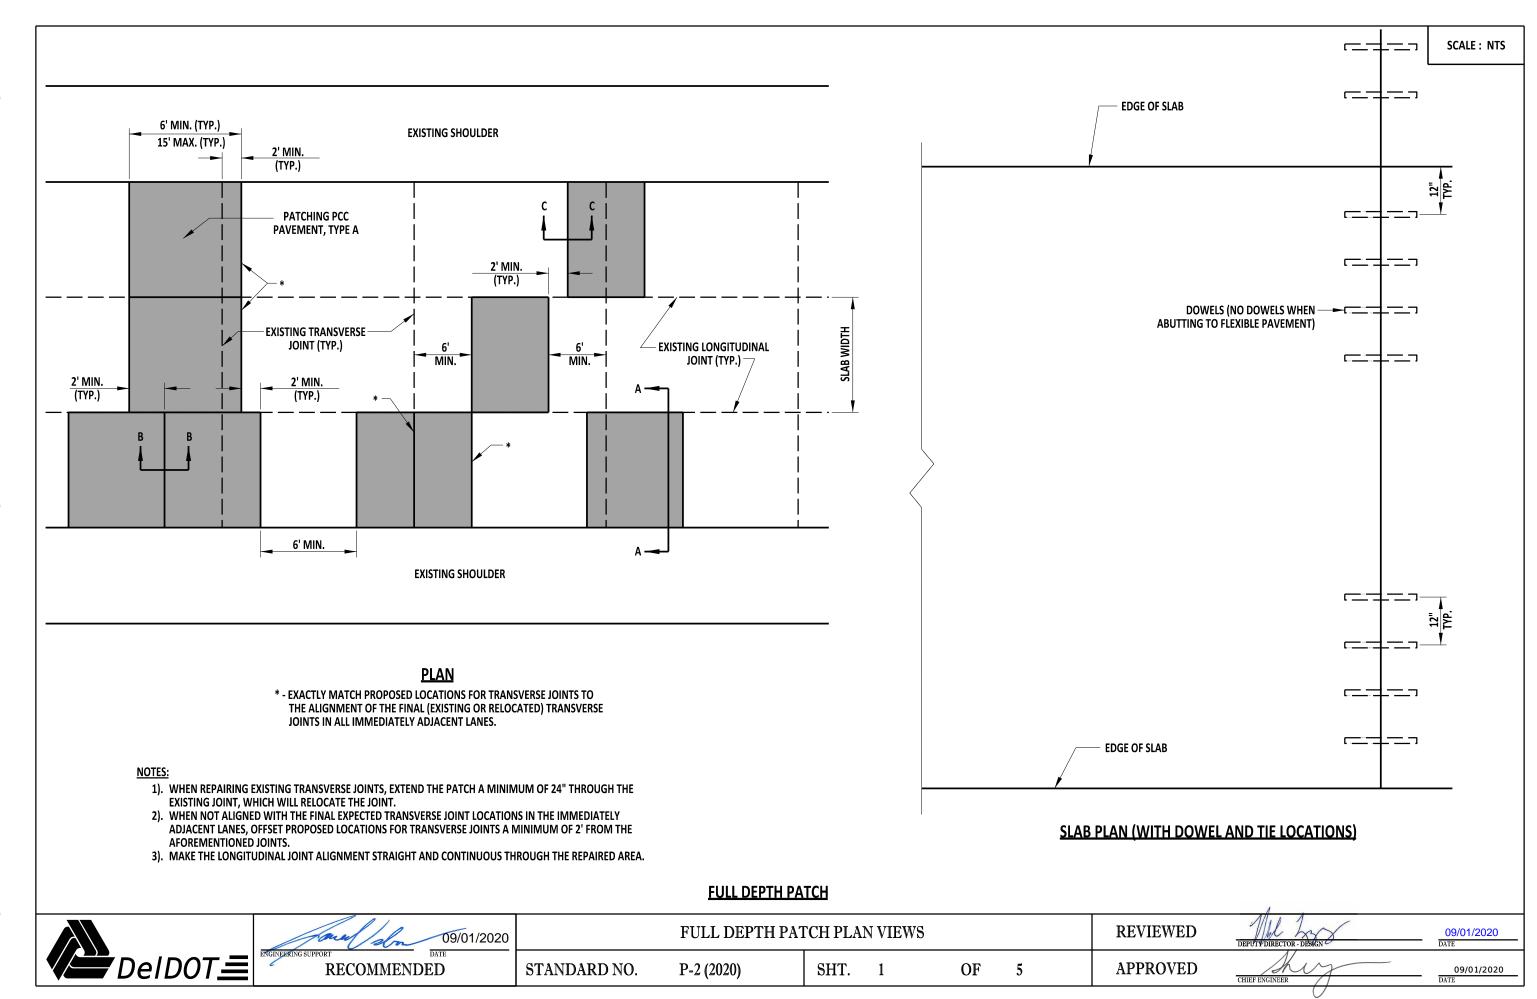


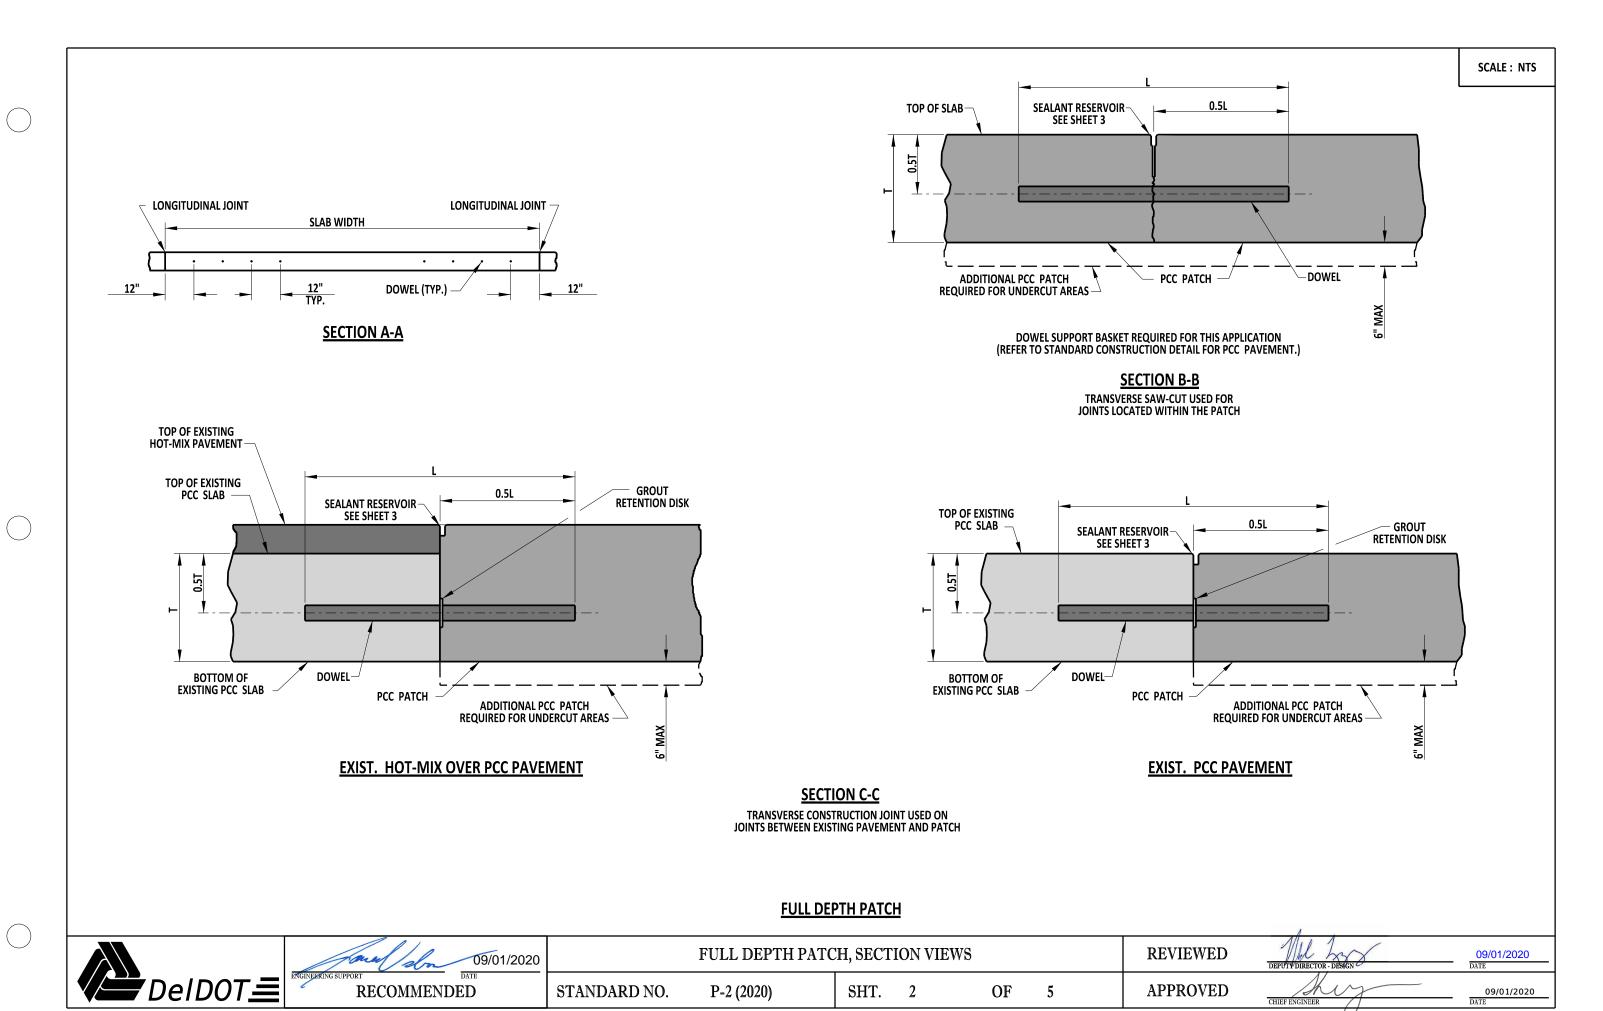

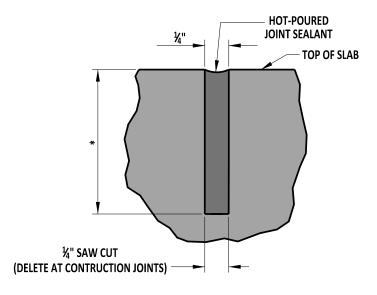


SEALANT RESERVOIR DETAIL-TRANSVERSE AND LONGITUDINAL JOINT


* - 0.3T (10" PCC PAVEMENT) 0.4T (12" PCC PAVEMENT)



D - DOWEL DIAMETER (INCLUDING PROTECTING COATINGS, IF ANY.)

GROUT RETENTION DISK





DOWEL BAR

NOTES:

- AS DIMENSIONED, THE WIDTH OF THE TRANSVERSE SEALANT RESERVOIR IS APPLICABLE WHEN THE TEMPERATURE OF THE PAVEMENT SURFACE IS BETWEEN 60°F AND 80°F. WHEN THE TEMPERATURE IS BELOW 60°F, CUT THE SEALANT RESERVOIR $\frac{1}{16}$ " WIDER. WHEN THE TEMPERATURE IS ABOVE 80°F, CUT THE SEALANT RESERVOIR $\frac{1}{16}$ " NARROWER.
- "T" REFERS TO THE "AS BUILT" SLAB THICKNESS.
- THE TOLERANCE ON ALL JOINT SEALANT DETAIL DIMENSIONS SHOWN WITHOUT A RANGE IS PLUS $\frac{1}{16}$ ", MINUS 0".
- CONSTRUCT THE TOP EDGES OF THE CONTACT SURFACES OF THE SEALANT MATERIAL ON BOTH SIDES OF THE JOINT RESERVOIR TO THE SAME ELEVATION.

FULL DEPTH PATCH



09/01/2020 RECOMMENDED

FULL DEPTH PATCH, SEALANT, GROUT RETENTION DISK AND DOWEL BARS STANDARD NO. P-2 (2020)


SHT. 3


OF 5 **REVIEWED**

APPROVED


CHIEF ENGINEER



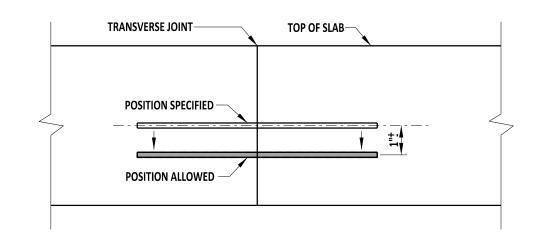

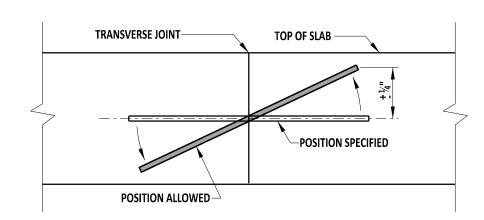


VERTICAL TRANSLATION

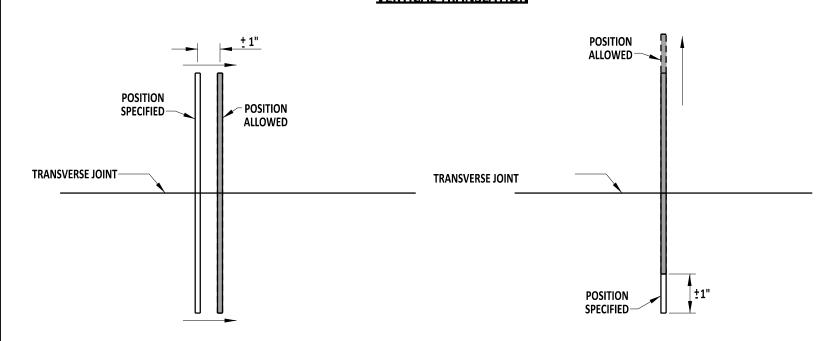

HORIZONTAL TRANSLATION

VERTICAL ROTATION

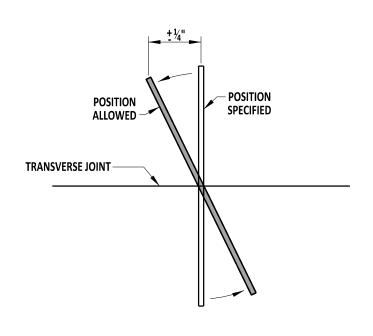



HORIZONTAL ROTATION

DOWEL BAR PLACEMENT TOLERANCES


LONGITUDINAL TRANSLATION

FULL DEPTH PATCH



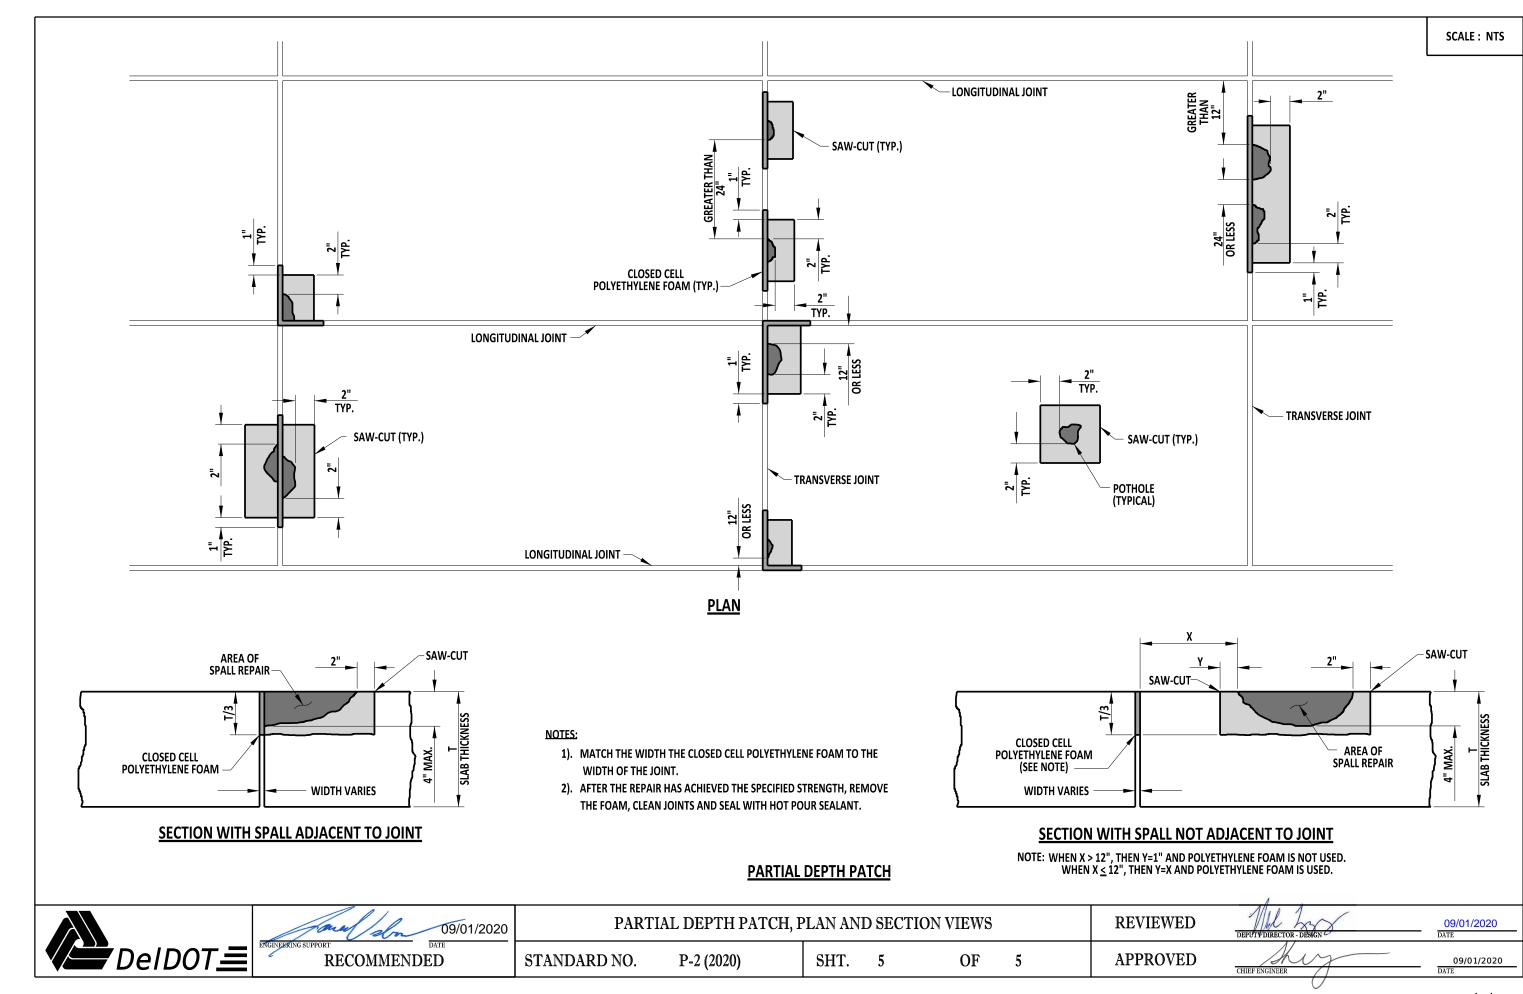

SCALE: NTS

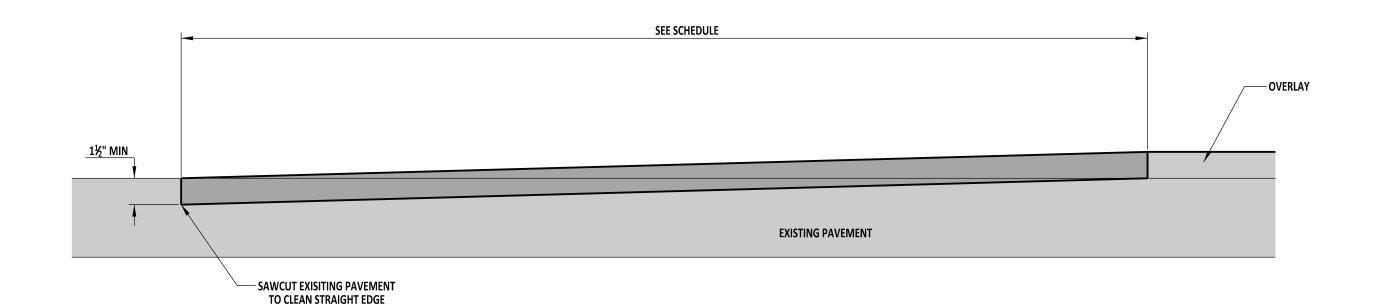


NOTES:

1). ADJUST THE PROFILE OF THE OVERLAY PAVING TO ASSURE A SMOOTH TRANSITION THROUGH THE BUTT JOINT.

2). CRACK SEAL THE JOINT BETWEEN THE BUTT JOINT AND THE EXISTING PAVEMENT.

CONDITION	SLOPE FEET:INCHES
GREATER THAN OR EQUAL TO 55 MPH	40:1
LESS THAN 55MPH	30:1
STOP CONTROLLED INTERSECTION	15:1

	DELAWARE DEPARTMENT OF TRANSPORTATION	BUTT JOINTS						APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	12/30/2014 DATE
		STANDARD NO.	P-3 (2014)	SHT.	1	OF	1	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER	12/11/2014 DATE

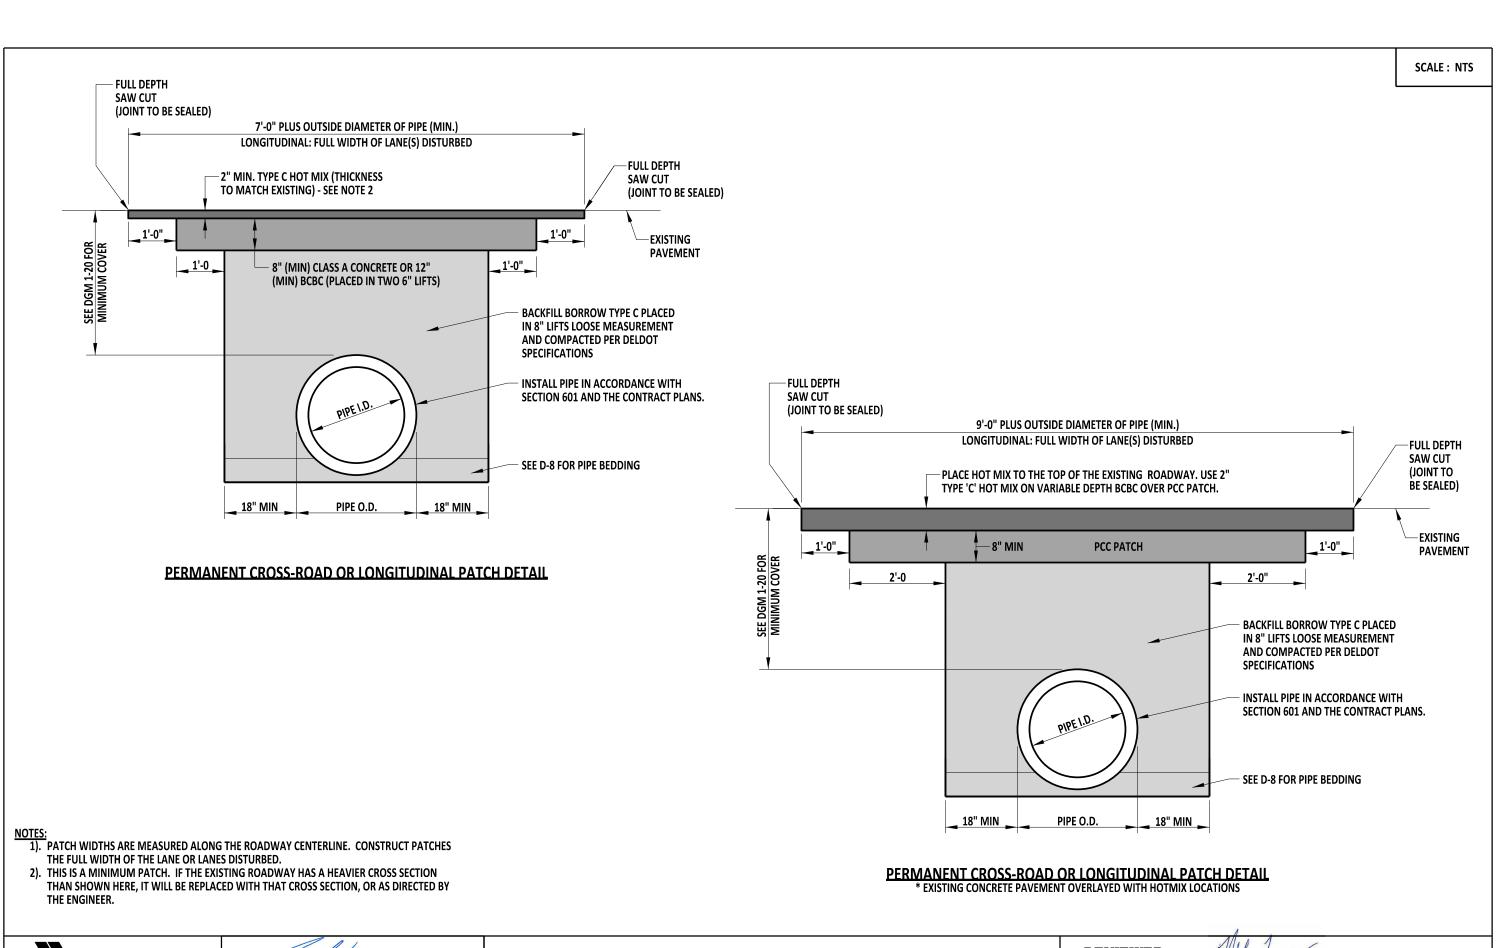

DeIDOT RECOMMENDED STANDARD NO. P-4 (2020) SHT. 1 OF 1


REVIEWED DEPUTYDIRECTOR - DESIGN

09/01/2020 DATE 09/01/2020


APPROVED


CHIEF ENGINEER

. .

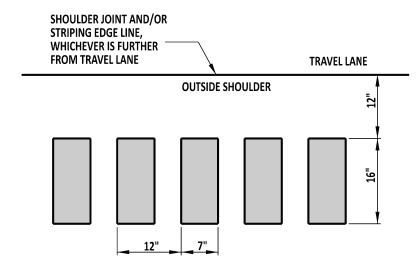


CONTINUOUS EDGELINE RUMBLE STRIP

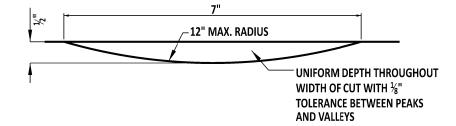

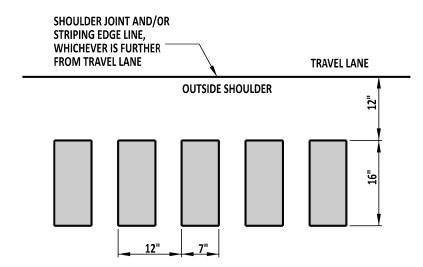



CONTINUOUS SHALLOW DEPTH RUMBLE STRIP

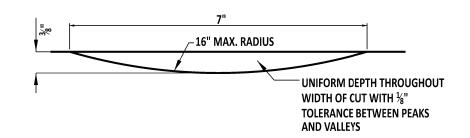


NOTES


- 1). RUMBLE STRIPS SHALL BE PLACED ON SHOULDERS IN LOCATIONS DESCRIBED ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
- 2). WHERE RUMBLE STRIPS ARE SHOWN ON THE PLANS TO BE ON BRIDGE DECKS, ONLY USE CONTINUOUS SHALLOW DEPTH RUMBLE STRIPS.
- 3). RUMBLE STRIPS ARE TO BE BROKEN FOR ALL INTERSECTIONS AND DRIVEWAY ENTRANCES WHERE THE EDGELINE PAVEMENT MARKINGS TIE INTO DRIVEWAY ENTRANCE OR WHERE THE EDGELINE PAVEMENT MARKINGS ARE BROKEN. THE INSTALLATION OF RUMBLE STRIPS SHOULD BE STOPPED 25' PRIOR TO THE POINT OF CURVATURE (PC) AND RESTARTED 25' AFTER THE POINT OF TANGENCY (PT).
- 4). RUMBLE STRIPS SHOULD NOT BE INSTALLED ON ACCELERATION, DECELERATION LANES, DECELERATION OR BYPASS LANES, OR TWO-WAY LEFT TURN LANES. INSTALLATION SHOULD STOP 150' PRIOR TO THE DIVERGE POINT OF A DECELERATION LANE AND SHOULD NOT COMMENCE UNTIL 150' DOWNSTREAM OF THE MERGE POINT FOR AN ACCELERATION LANE.



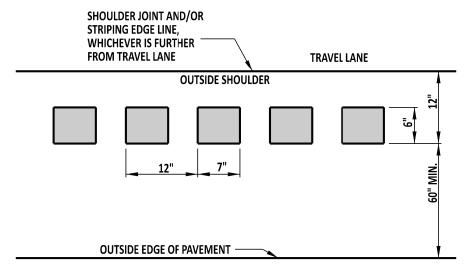


BIKE-FRIENDLY EDGELINE RUMBLE STRIPS

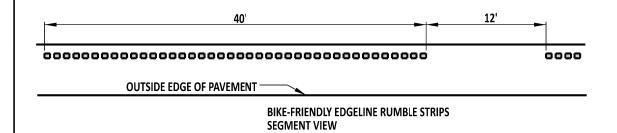

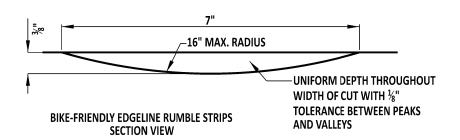


NOTES:


- 2). RUMBLE STRIPS ARE TO BE BROKEN FOR ALL INTERSECTIONS AND DRIVEWAY ENTRANCES WHERE THE EDGELINE PAVEMENT MARKINGS TIE INTO DRIVEWAY ENTRANCE OR WHERE THE EDGELINE PAVEMENT MARKINGS ARE BROKEN. THE INSTALLATION OF RUMBLE STRIPS SHOULD BE STOPPED 25' PRIOR TO THE POINT OF CURVATURE (PC) AND RESTARTED 25' AFTER THE POINT OF TANGENCY (PT).
- 3). RUMBLE STRIPS SHOULD NOT BE INSTALLED ON ACCELERATION, DECELERATION LANES, DECELERATION OR BYPASS LANES. OR TWO-WAY LEFT TURN LANES. INSTALLATION SHOULD STOP 150' PRIOR TO THE DIVERGE POINT OF A DECELERATION LANE AND SHOULD NOT COMMENCE UNTIL 150' DOWNSTREAM OF THE MERGE POINT FOR AN ACCELERATION LANE.
- 4). BICYCLE-FRIENDLY RUMBLE STRIPS SHOULD BE DISCONTINUED 50' BEFORE AND STARTED 50' AFTER WHEN ADJACENT TO GUARDRAIL WHERE THERE IS LESS THAN 5' BETWEEN THE OUTSIDE EDGE OF THE RUMBLE STRIP AND THE FACE OF THE GUARDRAIL.

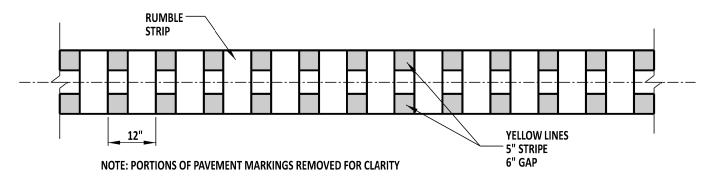


CENTERLINE RUMBLE STRIP

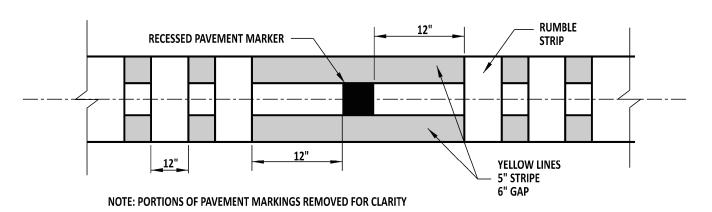

CENTERLINE RUMBLE STRIP AT RECESSED PAVEMENT MARKER

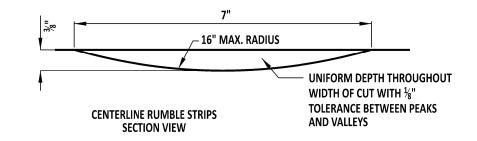

- 1). RUMBLE STRIPS SHALL BE PLACED ON SHOULDERS IN LOCATIONS DESCRIBED ON THE PLANS OR AS DIRECTED BY THE ENGINEER. 5). IN AREAS WHERE THE CENTER LINE LEADS INTO A RAISED CONCRETE ISLAND, THE CENTERLINE RUMBLE STRIPS SHOULD BE DISCONTINUED 25' IN ADVANCE OF THESE ISLANDS.
 - 6). IN AREAS WHERE THE CENTER LINE SPLITS TO CREATE, FOR EXAMPLE A TURN LANE, THE RUMBLE STRIPS SHOULD BE PLACED ONLY ALONG THE DOUBLE YELLOW CENTER LINE THAT IS NOT FORMING THE LEFT TURN LANE.
 - 7). ON ROADS WITH RECESSED PAVEMENT MARKERS (RPMs), CENTER LINE RUMBLE STRIPS SHOULD BEGIN 1' DOWNSTREAM OF THE RPM HOUSING AND TERMINATE 1' UPSTREAM OF THE RPM HOUSING.
 - 8). DO NOT INSTALL CENTERLINE RUMBLE STRIPS UNLESS THE DISTANCE BETWEEN THE EDGE OF THE PAVEMENT TO THE EDGE OF THE CENTER STRIPE IS GREATER THAN 10'.




1/04/2019

12/20/2018

WHERE LANE WIDTH ≤11' OR SHOULDER WIDTH ≤5'

PROPOSED LANE, OR, SHOULDER EDGE ----FINAL WEARING COURSE TOPSOIL 30° SEE NOTE 2 THICKNESS-COMPACTED FILL OR IN SITU MATERIAL PAVEMENT BASE

WHERE LANE WIDTH ≥11' OR SHOULDER WIDTH ≥5'

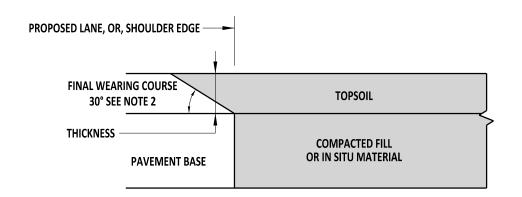

	THICKNESS OF SAFETY EDGE							
ſ	CONCRETE PAVEMENT	3"						
ſ	BITUMINOUS CONCRETE PAVEMENT FINAL	> 1¼"						
-	WEARING COURSE	, i						

- 1). LEVEL COMPACTED FILL OR IN-SITU MATERIAL WITH THE PAVEMENT BASE PRIOR TO
- FINAL BITUMINOUS CONCRETE PAVING LIFT.

 2). ANGLE ALLOWANCE OF 26° MINIMUM TO 40° MAXIMUM.

Del DOT	Γ ≛	ĒŇ
---------	------------	----

faul/2	09/01/2
EERING SUPPORT	DATE
RECOM	MENDED

/2020

STANDARD NO.

P-6 (2020)

SHT. 1


PAVEMENT SAFETY EDGE

OF

REVIEWED APPROVED

CHIEF ENGINEER




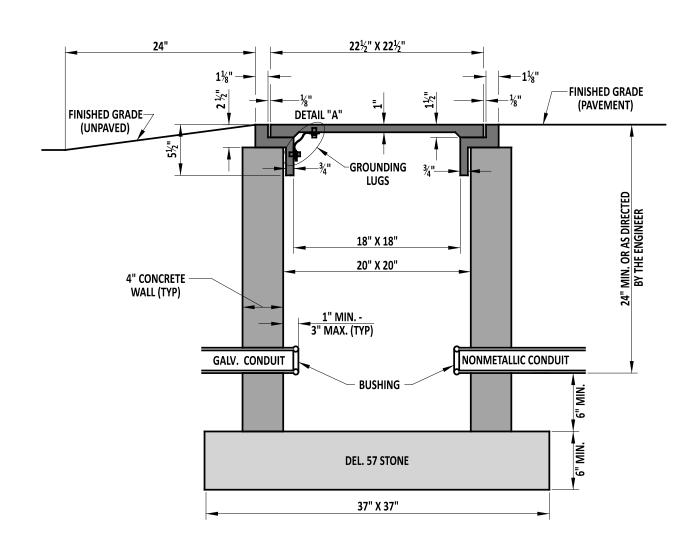


SECTION A-A

NOTES:

- 1). TYPE 1 CONDUIT JUNCTION WELL SHALL BE PRECAST CONCRETE. AT LEAST ONE HOLE IN PRECAST WELLS WILL BE OF A 5" DIAMETER COMPLETELY THROUGH THE WALL. UNUSED HOLES SHALL BE PLUGGED.
- 2). CONDUIT JUNCTION WELLS SHALL NOT BE PLACED UNDER A TRAVELWAY.
 3). ALL CONDUIT JUNCTION WELLS PLACED IN PAVED AREAS SHALL BE CONSTRUCTED FLUSH WITH THE FINISHED GRADE. ALL CONDUIT JUNCTION WELLS PLACED IN UNPAVED AREAS SHALL BE CONSTRUCTED ABOVE FINISHED GRADE AND GRADED TO DRAIN AWAY FROM THE WELL, AS DETAILED.
- 4). ALL CRACKS, GAPS, OR OPENINGS IN JUNCTION WELL WALL SHALL BE SEALED WITH CONCRETE.
- 5). AREA AROUND THE JUNCTION WELL SHALL BE BACKFILLED WITH BORROW TYPE C MATERIAL TO THE REQUIRED ELEVATION IN ACCORDANCE WITH SECTION 207. EXCESS AND UNSUITABLE MATERIAL SHALL BE DISPOSED PER SECTION 106.8.

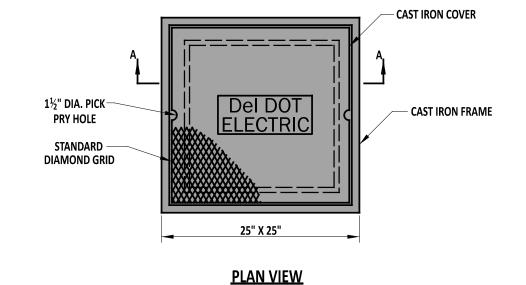

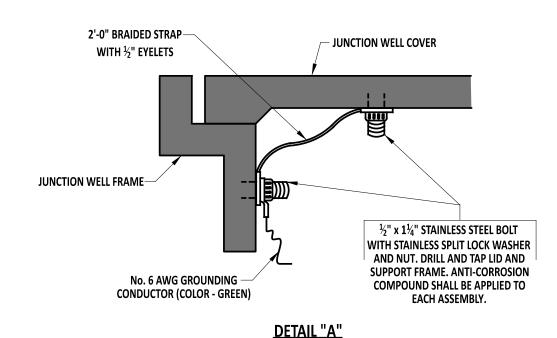



CHIEF ENGINEER



RECOMMENDED

09/01/2020

STANDARD NO.

T-1 (2020)

SHT. 1


CONDUIT JUNCTION WELL, TYPE 1


OF


APPROVED

REVIEWED


09/01/2020

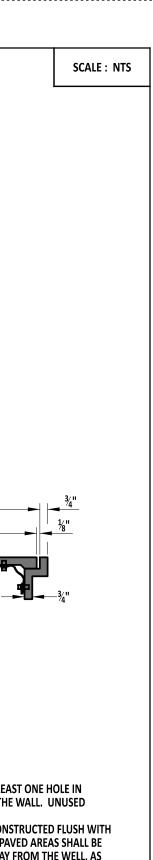

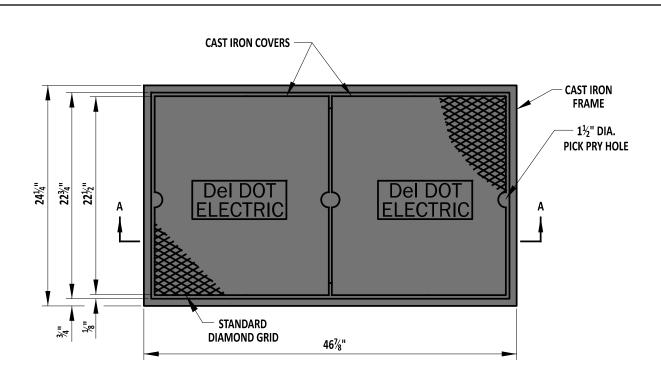


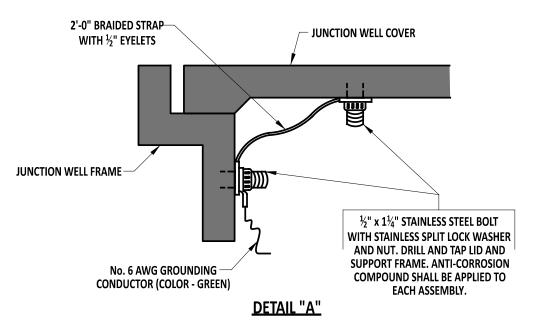

PLAN VIEW

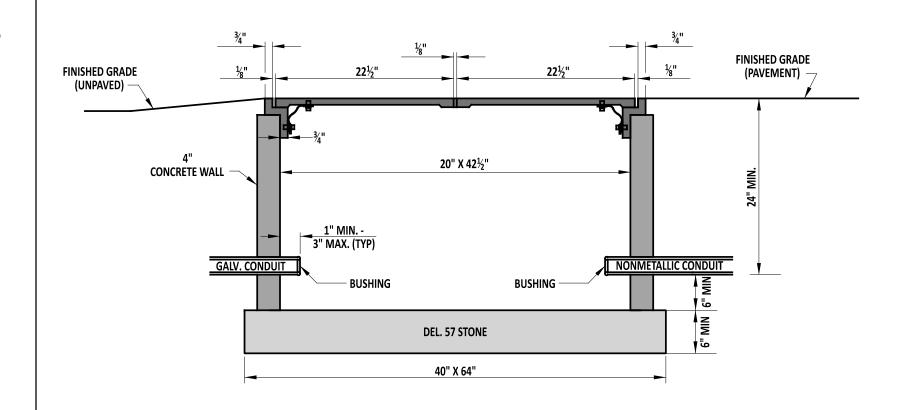

STANDARD NO.

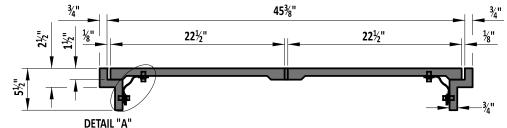

SECTION A-A

NOTES:

- 1). TYPE 4 CONDUIT JUNCTION WELL SHALL BE PRECAST CONCRETE. AT LEAST ONE HOLE IN PRECAST WELLS WILL BE OF A 5" DIAMETER COMPLETELY THROUGH THE WALL. UNUSED HOLES SHALL BE PLUGGED.
- 2). ALL CONDUIT JUNCTION WELLS PLACED IN PAVED AREAS SHALL BE CONSTRUCTED FLUSH WITH THE FINISHED GRADE. ALL CONDUIT JUNCTION WELLS PLACED IN UNPAVED AREAS SHALL BE CONSTRUCTED ABOVE FINISHED GRADE, AND GRADED TO DRAIN AWAY FROM THE WELL, AS DETAILED.
- 3). ALL CRACKS, GAPS, OR OPENINGS IN JUNCTION WELL WALL SHALL BE SEALED WITH CONCRETE. 4). AREA AROUND THE JUNCTION WELL SHALL BE BACKFILLED WITH BORROW TYPE C MATERIAL TO THE REQUIRED ELEVATION IN ACCORDANCE WITH SECTION 207. EXCESS AND UNSUITABLE

CHIEF ENGINEER



09/01/2020 RECOMMENDED

CONDUIT JUNCTION WELL, TYPE 4

T-1 (2020) SHT. 2

OF


REVIEWED

APPROVED


MATERIAL SHALL BE DISPOSED PER SECTION 106.8.

09/01/2020



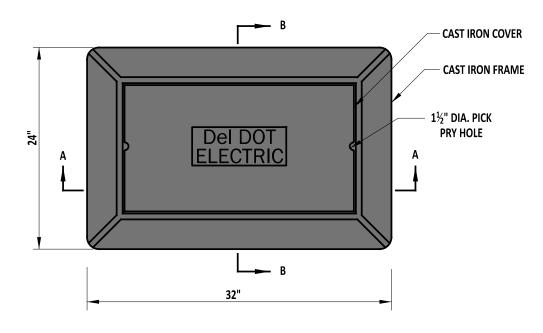



PLAN VIEW

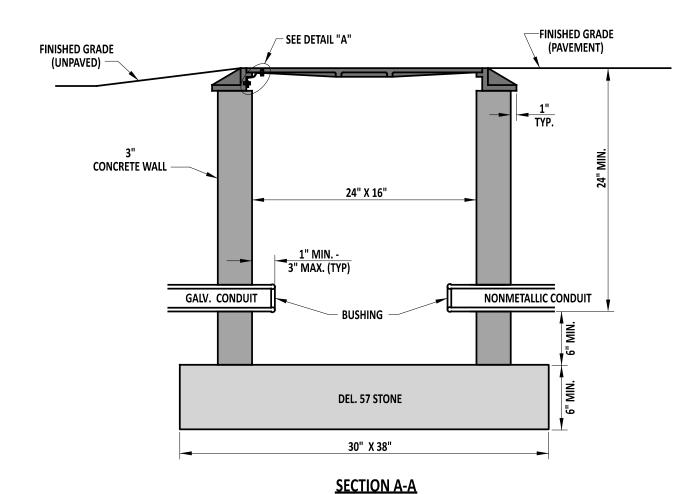

NOTES:

- 1). TYPE 5 CONDUIT JUNCTION WELL SHALL BE PRECAST CONCRETE. AT LEAST ONE HOLE IN PRECAST WELLS WILL BE OF A 5" DIAMETER COMPLETELY THROUGH THE WALL. UNUSED **HOLES SHALL BE PLUGGED.**
- 2). ALL CONDUIT JUNCTION WELLS PLACED IN PAVED AREAS SHALL BE CONSTRUCTED FLUSH WITH THE FINISHED GRADE. ALL CONDUIT JUNCTION WELLS PLACED IN UNPAVED AREAS SHALL BE CONSTRUCTED ABOVE GRADE AND GRADED TO DRAIN AWAY FROM THE WELL, AS DETAILED.
- 3). ALL CRACKS, GAPS, OR OPENINGS IN JUNCTION WELL WALL SHALL BE SEALED WITH CONCRETE.
 4). AREA AROUND THE JUNCTION WELL SHALL BE BACKFILLED WITH BORROW TYPE C MATERIAL
- TO THE REQUIRED ELEVATION IN ACCORDANCE WITH SECTION 207. EXCESS AND UNSUITABLE MATERIAL SHALL BE DISPOSED PER SECTION 106.8.

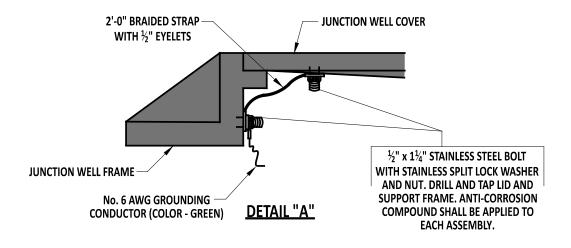

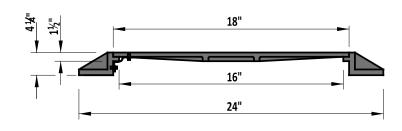

SECTION B-B



RECOMMENDED

09/01/2020

STANDARD NO.

CONDUIT JUNCTION WELL, TYPE 5


T-1 (2020)


SHT. 3

OF

REVIEWED APPROVED 09/01/2020


CHIEF ENGINEER

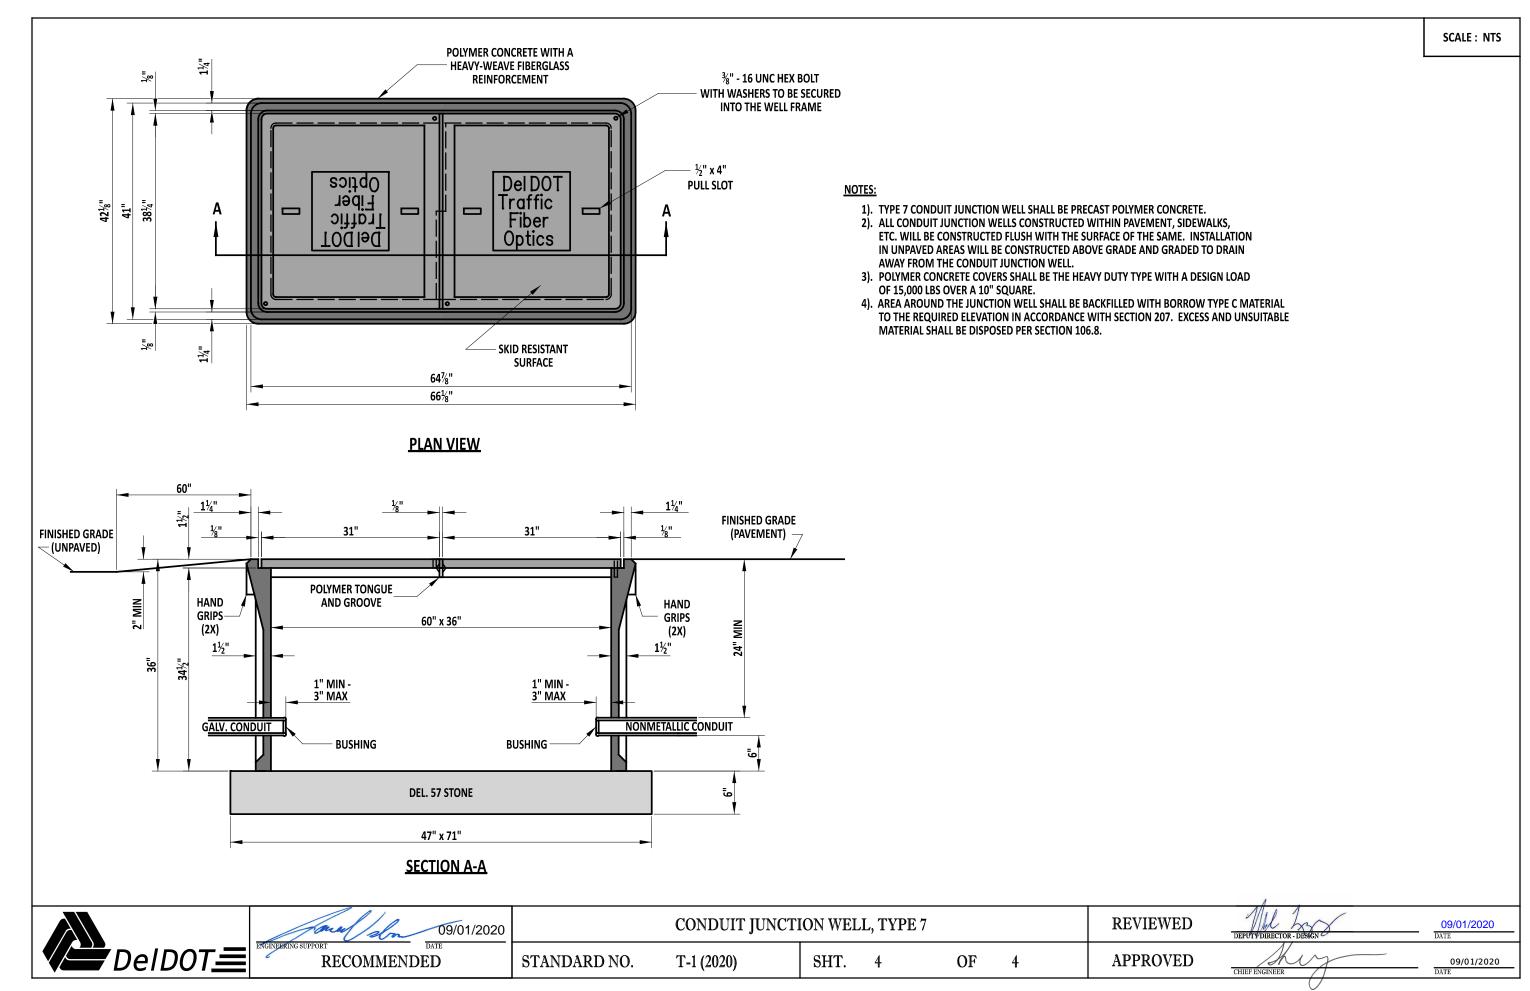


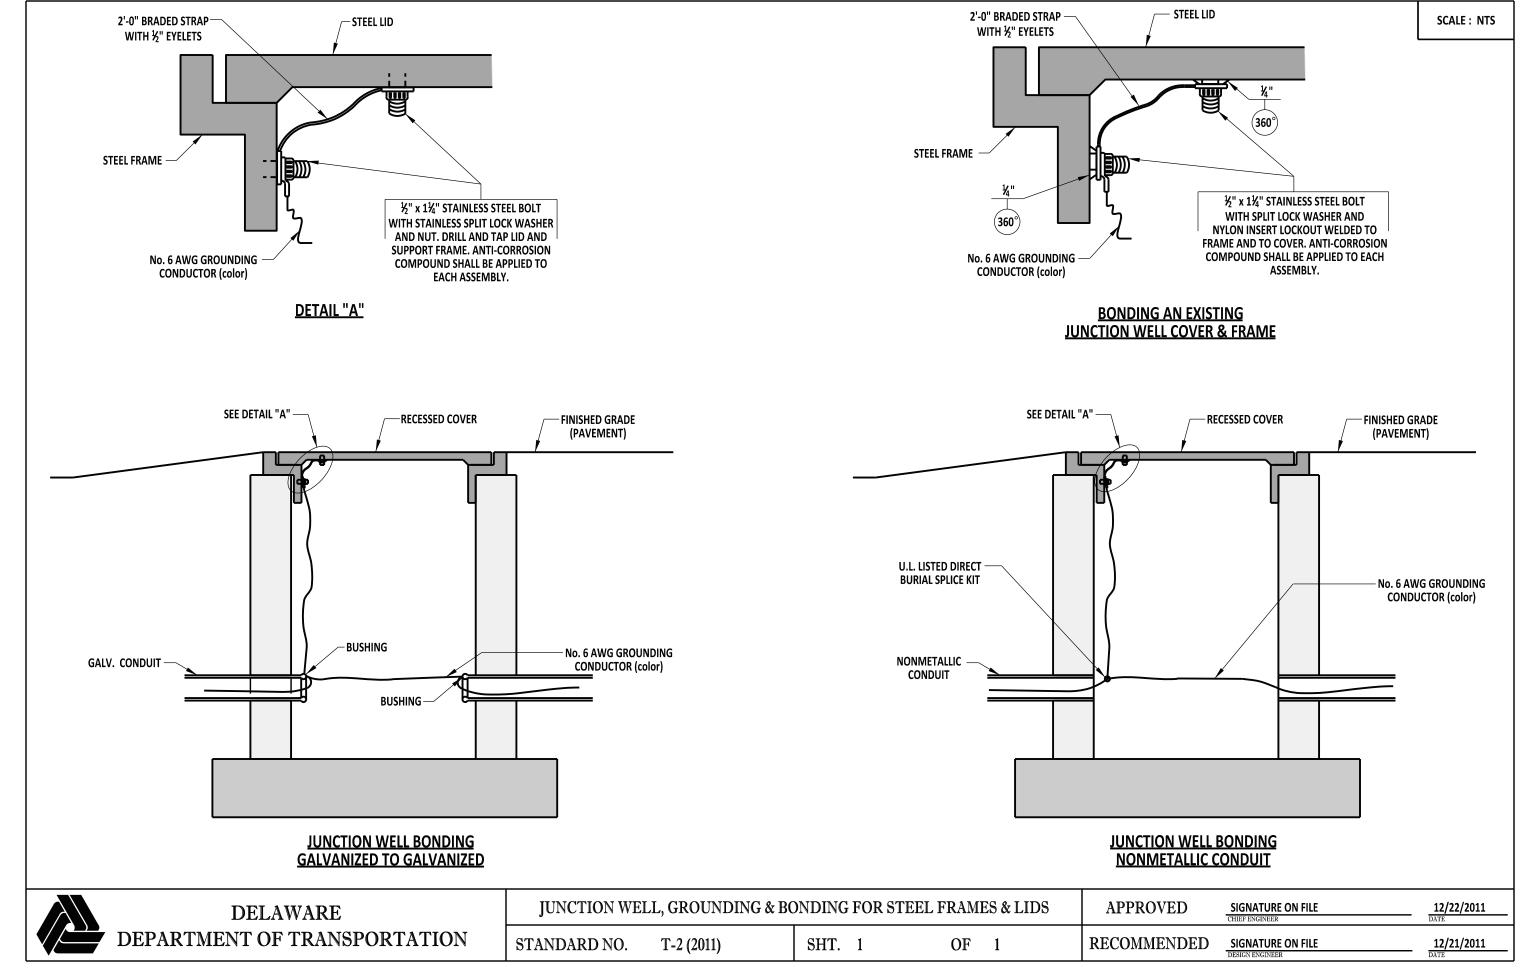



SCALE: NTS


T-3 DETAIL RESERVED LEFT BLANK FOR FUTURE



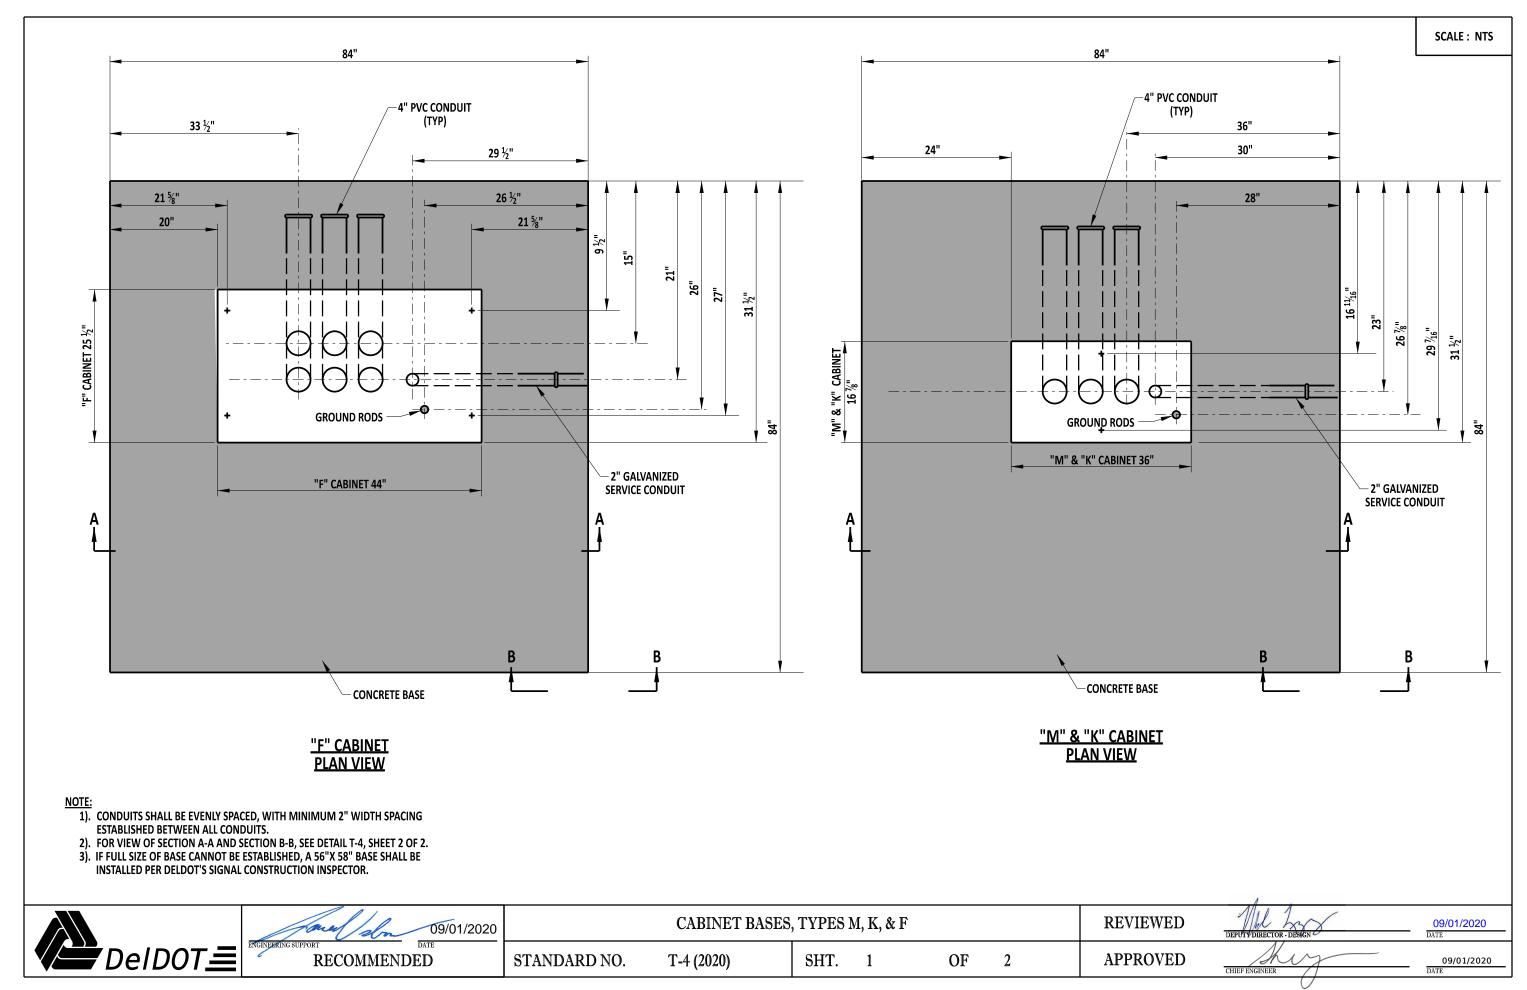

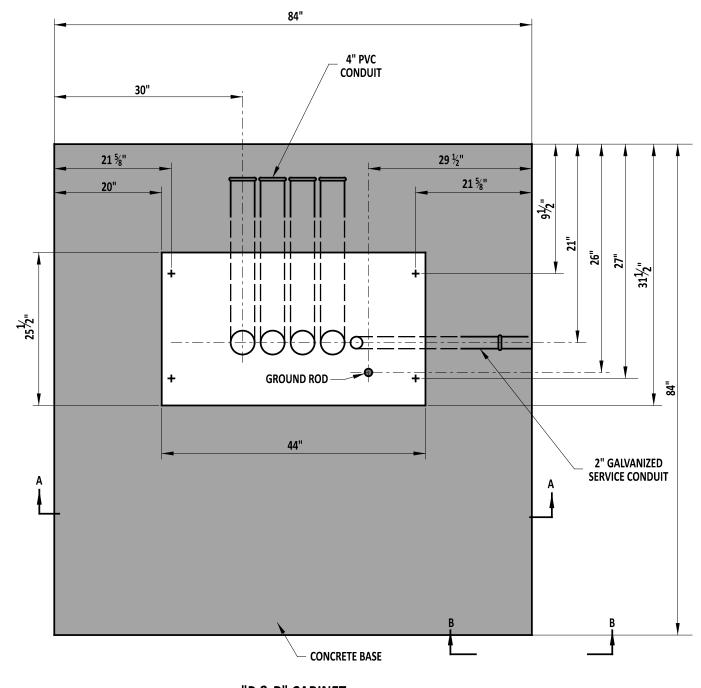

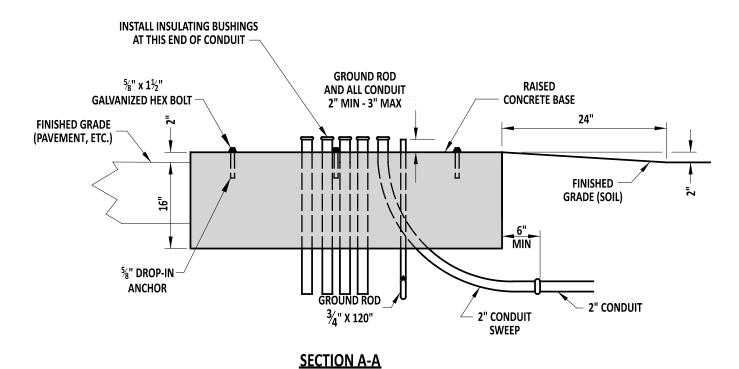




"P & R" CABINET PLAN VIEW

NOTE:


- 1). CONDUITS SHALL BE EVENLY SPACED, WITH MINIMUM 2" WIDTH SPACING ESTABLISHED BETWEEN ALL CONDUITS.
- 2). IF FULL SIZE OF BASE CANNOT BE ESTABLISHED, A 56" X 58" BASE SHALL BE INSTALLED PER DELDOT'S SIGNAL CONSTRUCTION INSPECTOR.


	Jacob Son 09/01/2020	CABINET BASES, TYPES P & R						REVIEWED	DEPUTY DIRECTOR - DESIGN	09/01/2020 DATE
V DeIDOT <u></u> ■	RECOMMENDED	STANDARD NO.	T-4 (2020)	SHT.	2	OF	2	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

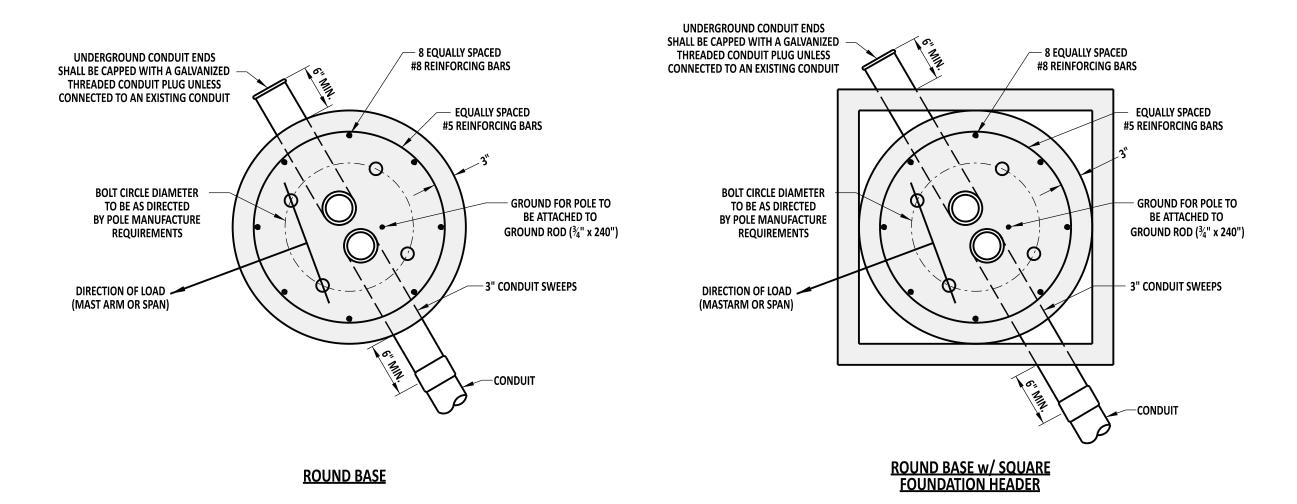


NOTE: SQUARE FOUNDATION HEADER SHALL HAVE A 6" MINIMUM DEPTH.

	DELAWARE DEDARTMENT OF TRANSPORTATION		IULE	BASES	APPROVED	SIGNATURE ON FILE CHIEF ENGINEER	5/31/2017 DATE		
		STANDARD NO.	T-5 (2017)	SHT.	1	OF	4	RECOMMENDED	SIGNATURE ON FILE DESIGN ENGINEER

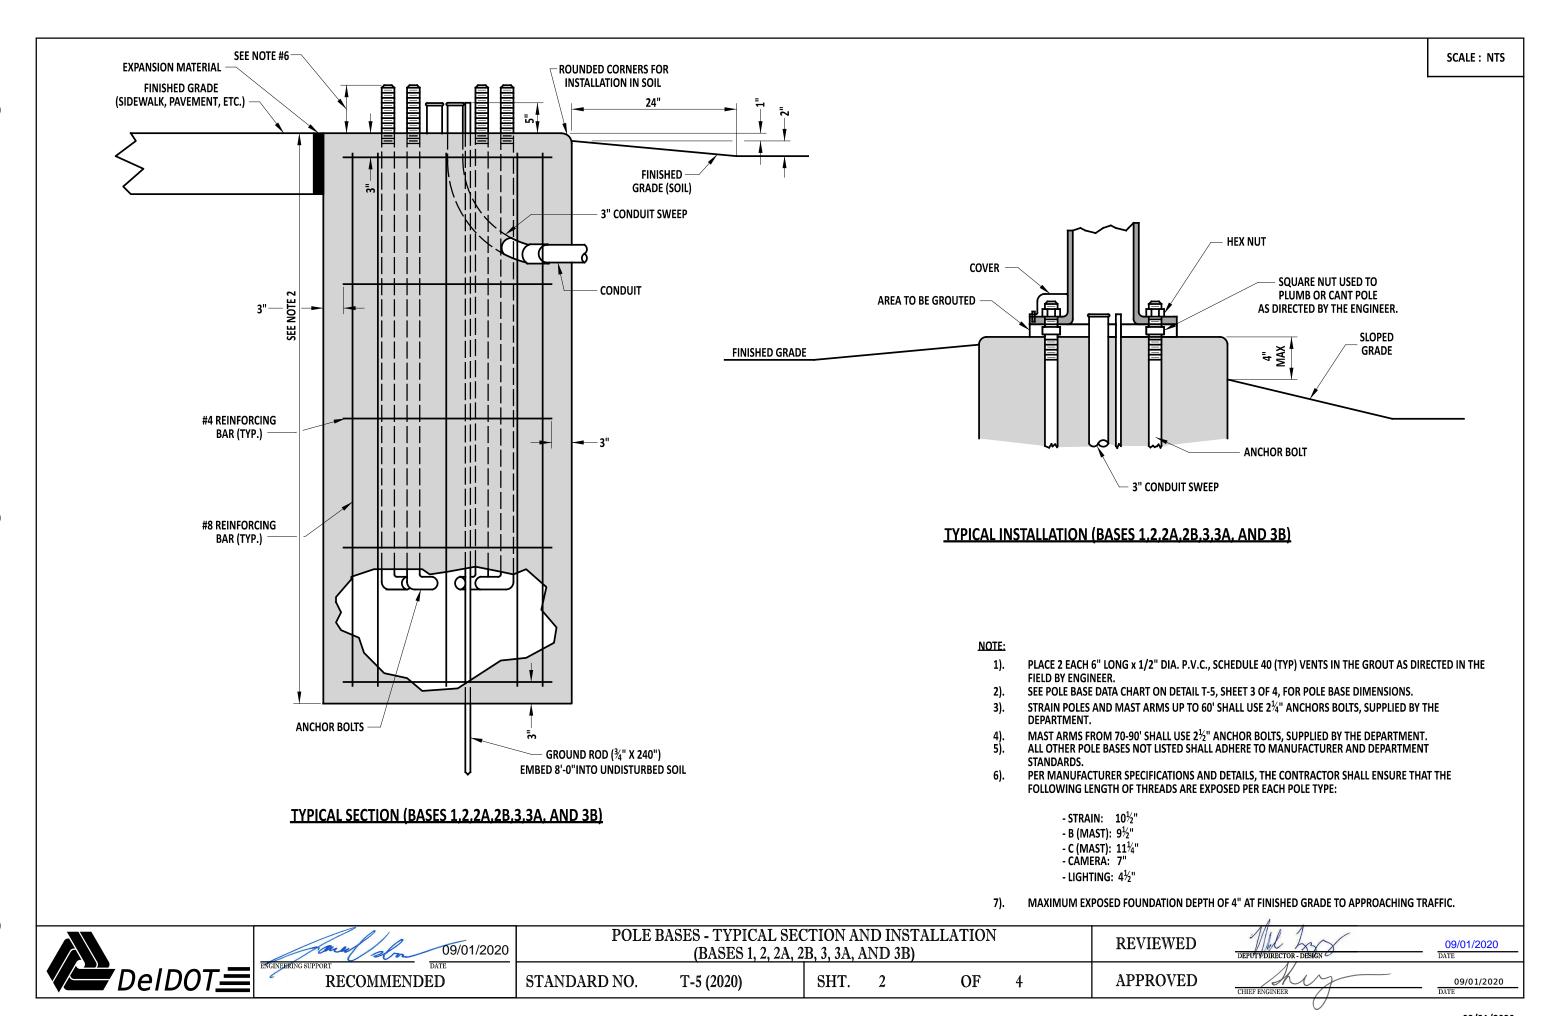

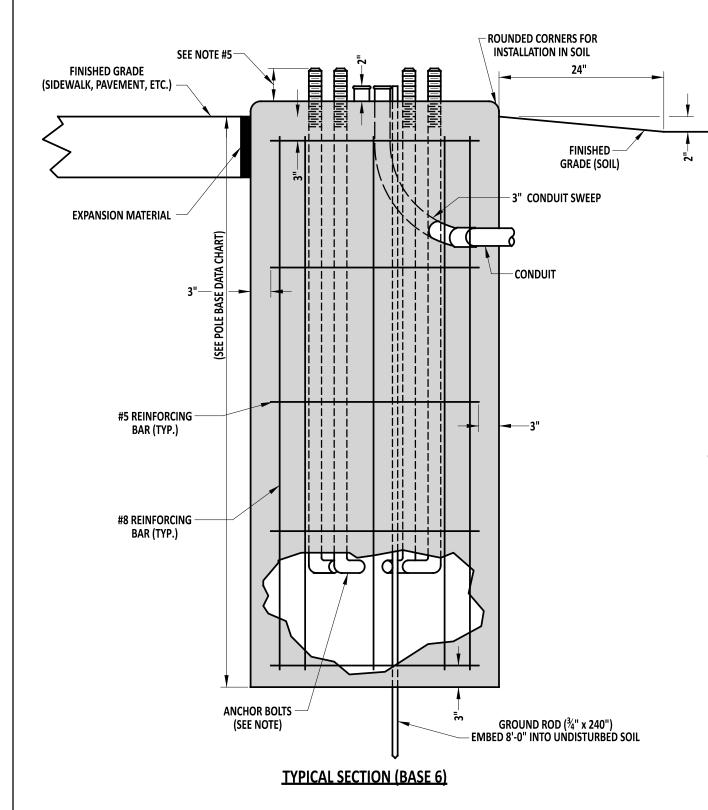

	POLE BASE DATA CHART										
POLE BASE TYPE #	DIAMETER	DEPTH	#5 HORIZONTAL REINFORCING BARS	#8 VERTICAL REINFORCING BARS	CONDUITS						
1	36"	7'-0"	5	8	2 - 3"						
2	36"	10'-0"	6	8	2 - 3"						
2A	48"	8'-0"	5	8	2 - 3"						
2B	60"	7'-0"	5	8	2 - 3"						
3	48"	10'-0"	14	17	2 - 3"						
3A	48"	12'-0"	17	17	2 - 3"						
3B	48"	15'-0"	21	17	2 - 3"						
3C	48"	20'-0"	27	17	2 - 3"						
4A & 4B	24"	2'-4"	NONE	NONE	2 - 2.5"						
6	24"	6'-0"	4	8	2 - 3"						

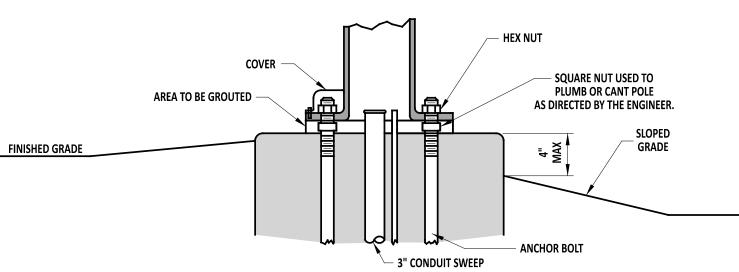

TYPICAL INSTALLATION (BASE 6)

- ANCHOR BOLTS AND BOLT PATTERN FOR TYPE 6 POLE BASES TO BE PROVIDED BY THE MANUFACTURER.
- STRAIN POLES AND MAST ARMS UP TO 60' SHALL USE 21/4" ANCHORS BOLTS, SUPPLIED BY THE
- MAST ARMS FROM 70-90' SHALL USE $2\frac{1}{2}$ " ANCHOR BOLTS, SUPPLIED BY THE DEPARTMENT.
- ALL OTHER POLE BASES NOT LISTED SHALL ADHERE TO MANUFACTURER AND DEPARTMENT STANDARDS.
- PER MANUFACTURER SPECIFICATIONS AND DETAILS, THE CONTRACTOR SHALL ENSURE THAT THE FOLLOWING LENGTH OF THREADS ARE EXPOSED PER EACH POLE TYPE:
 - STRAIN: 10½"
 - B (MAST): 9½" - C (MAST): 111/4"
 - CAMERA: 7"
 - LIGHTING: 4\%"
- MAXIMUM EXPOSED FOUNDATION DEPTH OF 4" AT FINISHED GRADE IN ANY ORIENTATION AROUND POLE BASE.

CHIEF ENGINEER



RECOMMENDED

09/01/2020

POLE BASES - TYPICAL SECTION (BASE 6) AND POLE BASE DATA CHART STANDARD NO. T-5 (2020)

SHT. 3


OF

REVIEWED

APPROVED

09/01/2020



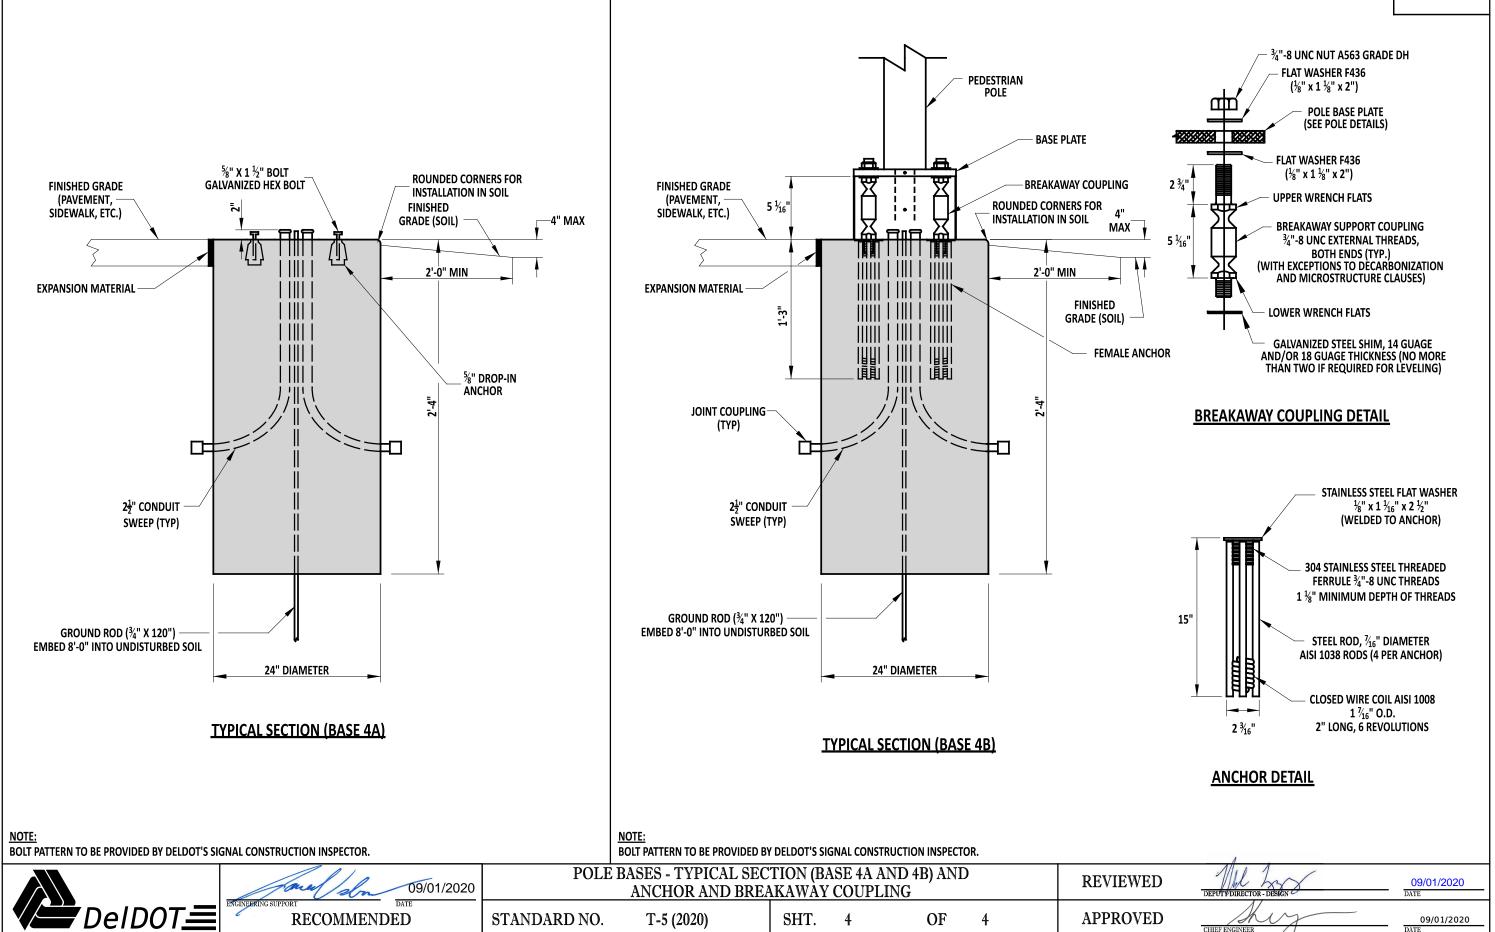

T-6 DETAIL REMOVED IN 2020 REVISIONS LEFT BLANK FOR FUTURE

	DELAWARE DEPARTMENT OF TRANSPORTATION	-						APPROVED	CHIEF ENGINEER	DATE
		STANDARD NO.	T-6	SHT.	1	OF	1	RECOMMENDED	DESIGN ENGINEER	DATE

T-7 DETAIL REMOVED IN 2020 REVISIONS LEFT BLANK FOR FUTURE

DELAWARE
DEPARTMENT OF TRANSPORTATION

ION STANDARD NO.

T-7

SHT. 1

OF

2


APPROVED


RECOMMENDED

EF ENGINEER

ER

D

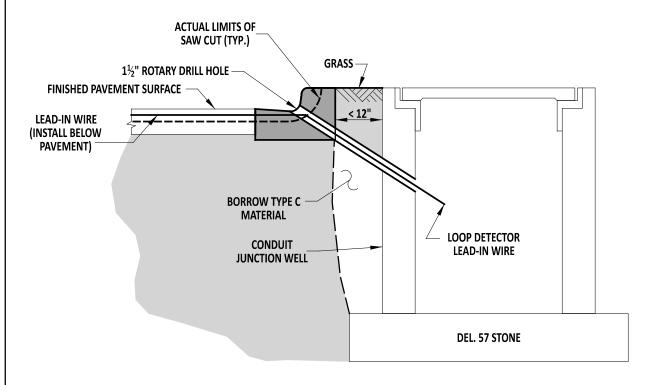

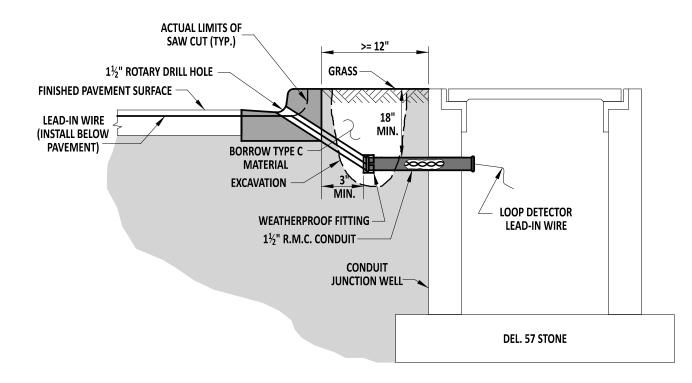



LOOP DETECTOR LEAD-IN WIRE INSTALLATION

NOTES:

- 1). ALL SAWCUTS SHALL BE A DEPTH OF $3\frac{1}{2}$ " ON ALL SURFACES.
- 2). CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE CURB JOINT.
- 3). ALL SAWCUTS SHALL BE PATCHED WITH NON-SHRINK CONCRETE CAULK.
- 4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, 3 $\frac{1}{2}$ ".
- 5). CONTRACTOR SHALL INSTALL DETECTABLE WARNING TAPE IN TRENCH FOR LEAD-IN CONDUIT.

Janel Son 09/01/2020	LOOP JUNCTION WELL B	P DETECTOR LEAD- BEHIND CURB OR C	IN WIRE URB AND	REVIEWED	DEPUTY DIRECTOR - DESIGN	09/01/2020 DATE			
DelDOT RECOMMENDED	STANDARD NO.	T-8 (2020)	SHT.	1	OF	4	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

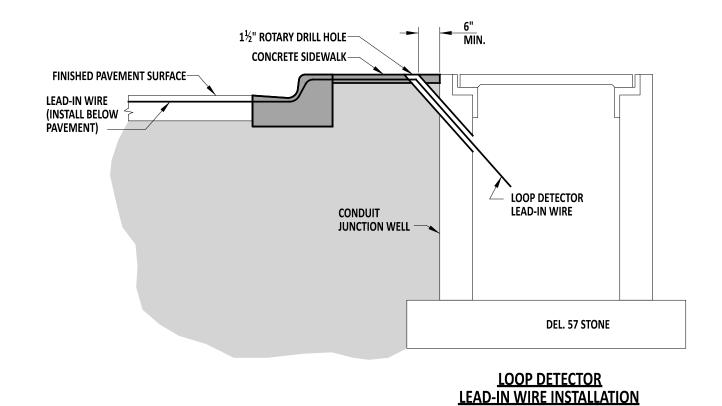


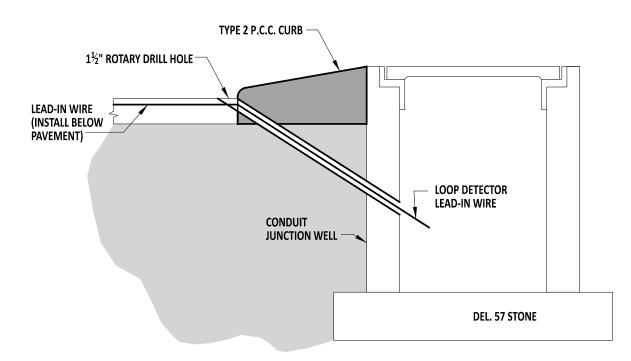

NOTES:

- 1). ALL SAWCUTS SHALL BE A DEPTH OF 3½" ON ALL SURFACES.
 2). CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE
- 3). ALL SAWCUTS SHALL BE PATCHED WITH NON-SHRINK CONCRETE CAULK.
- 4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, $3\frac{1}{2}$ ".


	Janel Son 09/01/2020	LOOP DETECTOR LEAD-IN WIRE INSTALLATION - JUNCTION WELL BEHIND CURB OR CURB AND GUTTER WITH OR WITHOUT SIDEWALK						REVIEWED	DEPUT POIRECTOR - DESIGN	09/01/2020 DATE
V DeIDOT <u></u>	RECOMMENDED	STANDARD NO.	T-8 (2020)	SHT.	2	OF	4	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

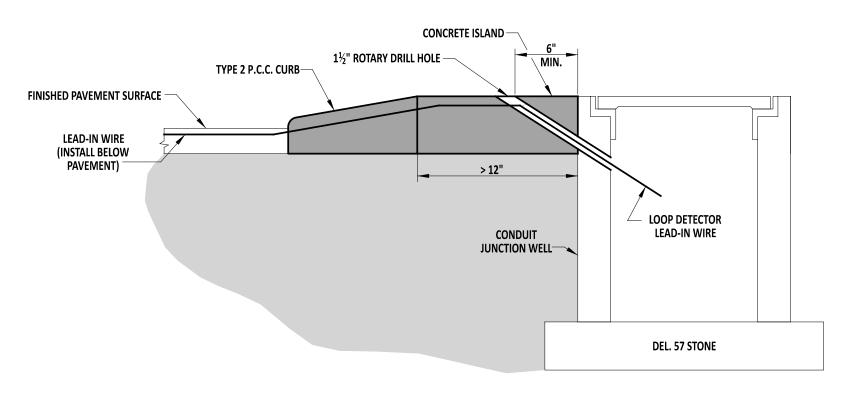


NOTES:

- ALL SAWCUTS SHALL BE A DEPTH OF 3½" ON ALL SURFACES.
 CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE CURB JOINT.
- 3). ALL SAWCUTS SHALL BE PATCHED WITH NON-SHRINK CONCRETE CAULK.
 4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, 3 ½".

	Jarel Son 09/01/2020	LOC	12 118 186 1618 18411		REVIEWED	DEPUTY DIRECTOR - DESIGN	09/01/2020 DATE			
V DeIDOT <u></u> ■	RECOMMENDED	STANDARD NO.	T-8 (2020)	SHT.	3	OF	4	APPROVED	CHIEF ENGINEER	09/01/2020 DATE

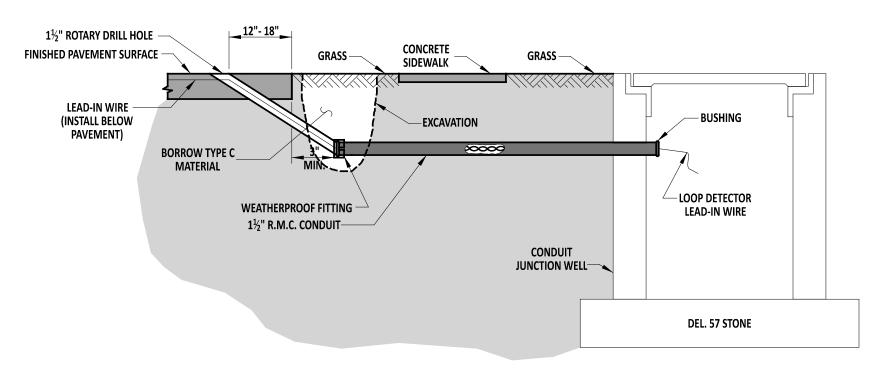

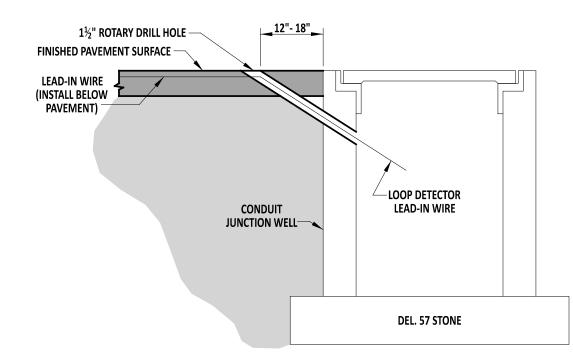

NOTES:

- 1). ALL SAWCUTS SHALL BE A DEPTH OF $3\frac{1}{2}$ " ON ALL SURFACES.
- 2). CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE CURB JOINT.
- 3). ALL SAWCUTS SHALL BE SEALED WITH AN APPROVED LOOP DETECTOR SEALANT.
- 4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, 3 $\frac{1}{2}$ ".
- 5). CONTRACTOR SHALL INSTALL DETECTABLE WARNING TAPE IN TRENCH FOR LEAD-IN CONDUIT.

DAIDOT=

09/01/2020
DATE

RECOMMENDED

LOOP DETECTOR LEAD-IN WIRE INSTALLATION - JUNCTION WELL WITH SIDEWALK AND GRASS STRIPS AND DIRECTLY ADJACENT TO PAVED SURFACE


REVIEWED

LOOP DETECTOR
LEAD-IN WIRE INSTALLATION


DEPUTY DIRECTOR - DESIGN DATE

STANDARD NO. T-8 (2020) SHT. 4 OF 4 APPROVED

08/21/2020

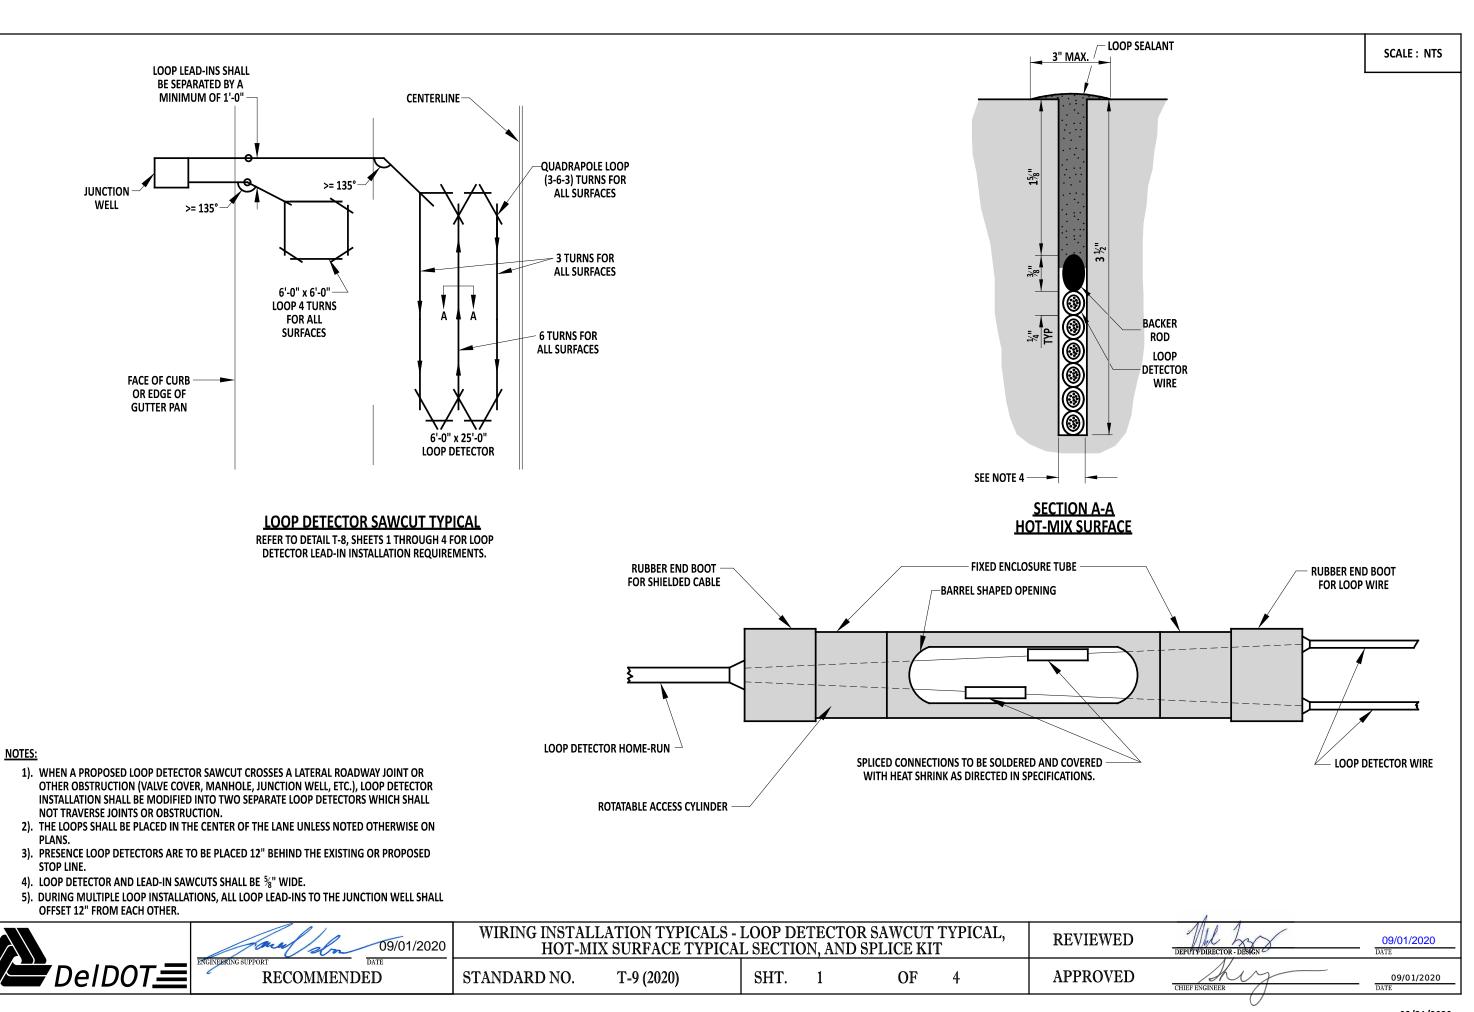



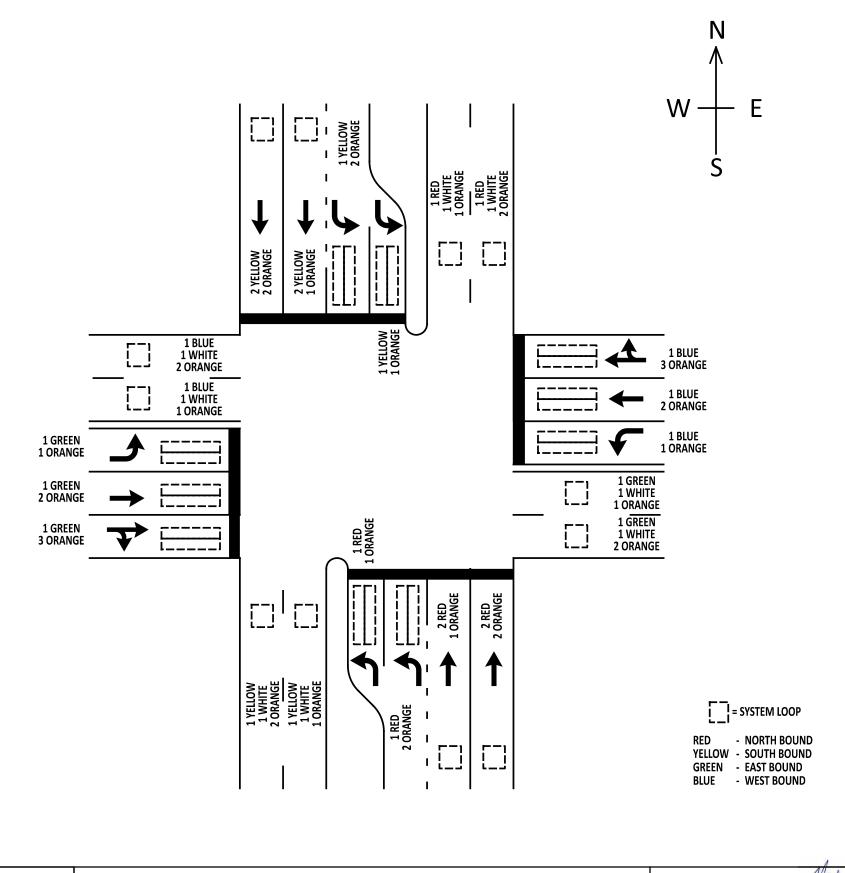

NOTES

1). ORANGE BANDS SHALL DESIGNATE THE LANE ASSIGNMENT. ALL LANES SHALL BE DESIGNATED FROM LEFT TO RIGHT IN THE DIRECTION OF TRAVEL. EXAMPLE: FOR A DOUBLE LEFT TURN WITH 2 THRU LANES FOR NORTHBOUND, THE CABLES WILL BE IDENTIFIED AS 1-RED W/ 1-ORANGE (LT LANE 1) 1-RED W/ 2-ORANGE (LT LANE 2), 2-RED W/ 1-ORANGE (THRU LANE 1) AND 2-RED W/ 2-ORANGE (THRU LANE 2). THIS CODE IS THEN FOLLOWED FOR THE REMAINING APPROACHES TO THE INTERSECTION.



O9/01/2020
DATE

WIRING INSTALLATION TYPICALS - TYPICAL INTERSECTION LAYOUT

REVIEWED

DEPUTY DIRECTOR - DESIGN DATE

RECOMMENDED


STANDARD NO. T-9 (2020)

SHT. 2

OF 4

APPROVED CHIEF ENGINEER

09/01/2020 DATE

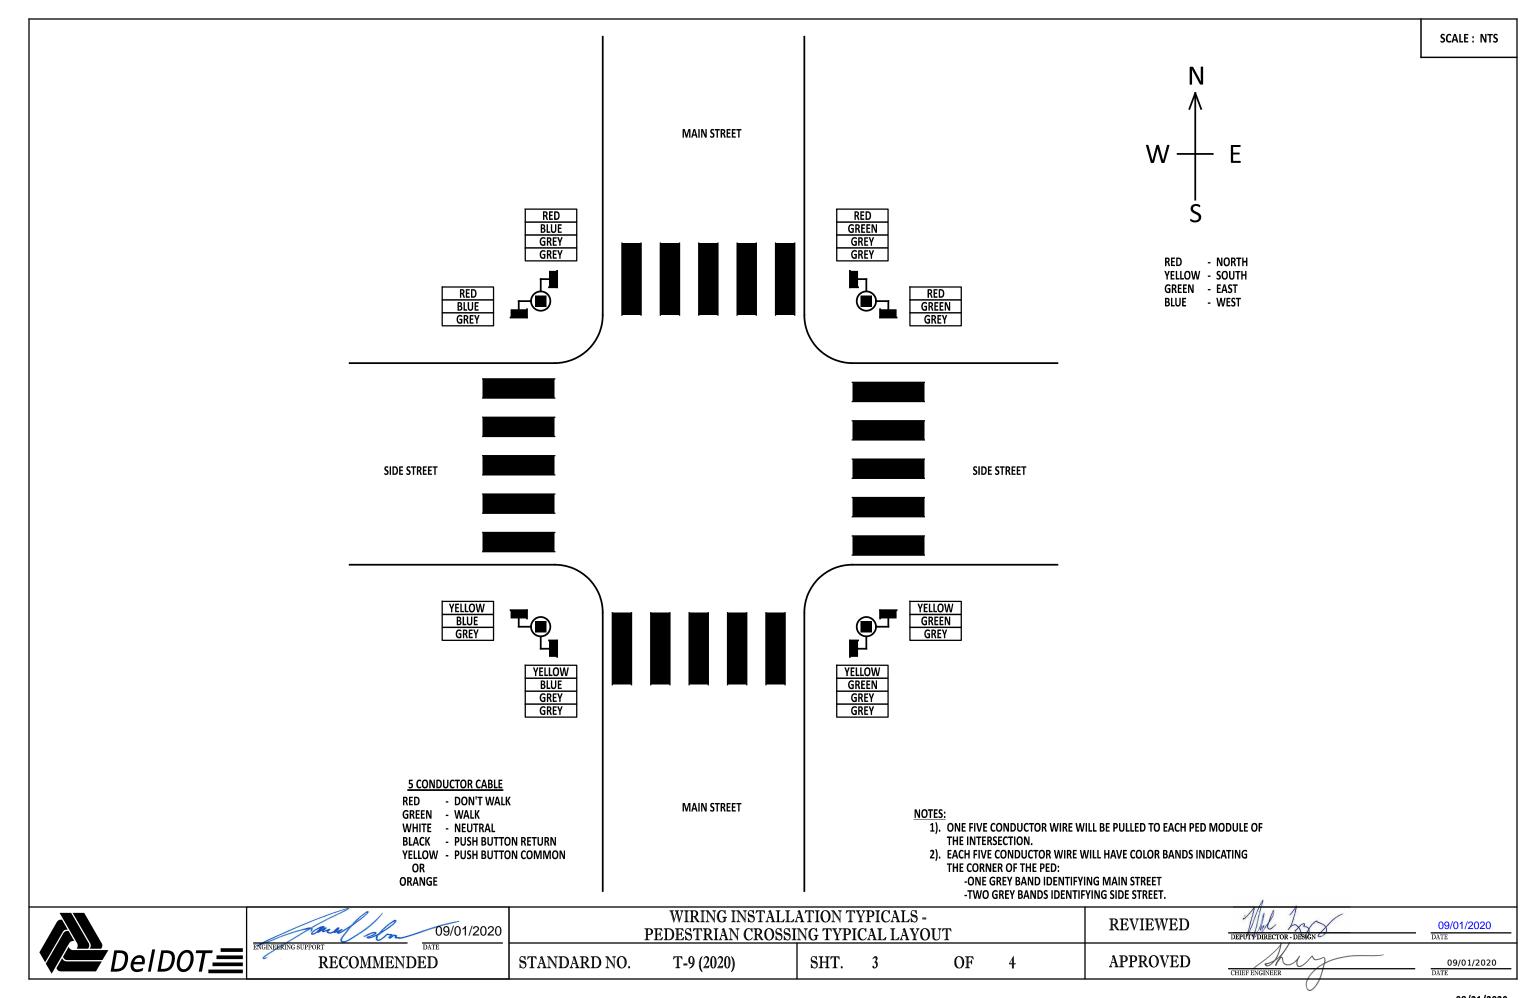

WIRING COLOR CODE FOR #14/16 SIGNAL CABLE FOR SIGNAL HEADS

WIRE COLORS

BLACK TRACER/RED

BLACK TRACER/ORANGE

BLACK TRACER/GREEN

BLACK TRACER/WHITE

MAIN STREET SIGNALS

SOLID RED
SOLID ORANGE
SOLID GREEN
SOLID WHITE

RED YELLOW GREEN GROUND

SIGNAL INDICATION

RED

YELLOW


GREEN

GROUND

MAST ARM:

MAIN STREET WIRE COLORS
SOLID RED
SOLID ORANGE
SOLID GREEN

SIGNAL INDICATION RED YELLOW GREEN GROUND



NON-PERMISSIVE LEFT TURN SIGNALS

SIDE STREET SIGNALS

MAIN STREET
WIRE COLORS

WHITE TRACER/RED
WHITE TRACER/GREEN
WHITE TRACER/BLUE

SIDE STREET
WIRE COLORS

BLACK/RED TRACER
SOLID BLACK
SOLID BLUE
BLUE/BLACK TRACER

RED
YELLOW
GREEN
GROUND

SIGNAL INDICATION

MAIN STREET PERMISSIVE LEFT


WIRE COLORS INDICA

SOLID BLACK YELLO

SOLID BLUE GRE

SOLID WHITE NEUT

SIGNAL INDICATION YELLOW GREEN NEUTRAL



5-SECTION SIGNAL ARROWS MAIN STREET WIRE COLORS SOLID BLUE SOLID BLACK

BLACK

SIDE STREET WIRE COLORS BLACK/RED TRACER BLUE/BLACK TRACER

SOLID RED

SOLID YELLOW

SOLID GREEN

YELLOW ARROW GREEN ARROW


> MAIN STREET FLASHING TOP "T"


WIRE COLORS

BLACK/RED TRACER
SOLID WHITE

SOLID WHITE


SIGNAL INDICATION RED NEUTRAL






THREE - SECTION

12" SIGNAL HEADS



ONE-WAY, FIVE-SECTION 12" SIGNAL HEADS

STANDARD NO.



ONE-WAY FOUR - SECTION 12" SIGNAL HEADS

OF

4

NOTES

- 1). HEAD CABLE SHALL BE MARKED WITH THE COLOR DESIGNATED FOR EACH DIRECTION OF TRAVEL. RED/NORTH, YELLOW/SOUTH, GREEN/EAST, BLUE/WEST.
- 2). SIDE STREET SIGNAL HEADS SHALL BE SPLICED INTO THE BLACK TRACER WIRES INSTEAD OF SOLID COLOR WIRES.
- ALL SIGNAL HEADS INSTALLED ON MAST ARMS SHALL HAVE OWN SIGNAL CABLE AND SHALL BE SPLICED AT THE BASE.
- 4). ALL BOLTS SHALL BE STAINLESS STEEL.
- 5). ALL BACKPLATES SHALL BE POWDER-COATED ALUMINUM.
- 6). ALL BACKPLATES SHALL BE OUTLINED WITH A 2" REFLECTIVE YELLOW STRIP.

LEGEND:

CHIEF ENGINEER

LOCATION OF TERMINAL BLOCK



09/01/2020
DATE
RECOMMENDED

WIRING INSTALLATION TYPICALS - WIRING COLOR CODES

SHT. 4

T-9 (2020)


REVIEWED

APPROVED


DEPUTY DIRECTOR - DESIGN


09/01/2020 DATE

T-10 DETAIL RESERVED LEFT BLANK FOR FUTURE




<u>INTERMEDIATE</u>

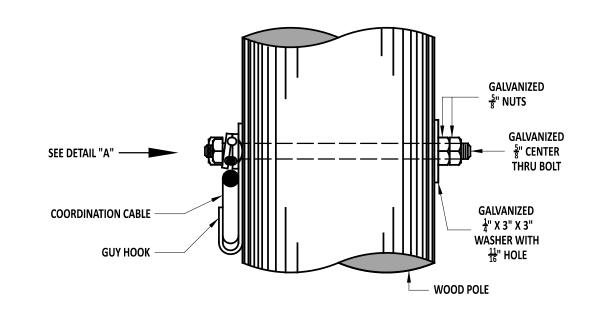


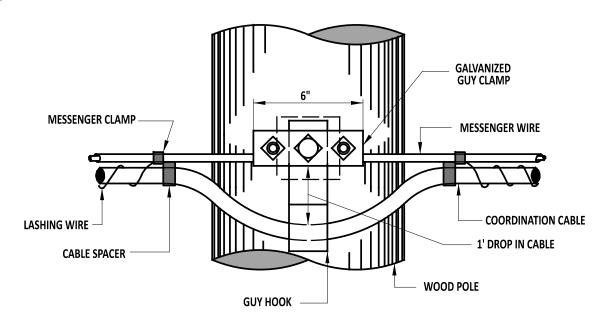

SIDE VIEW





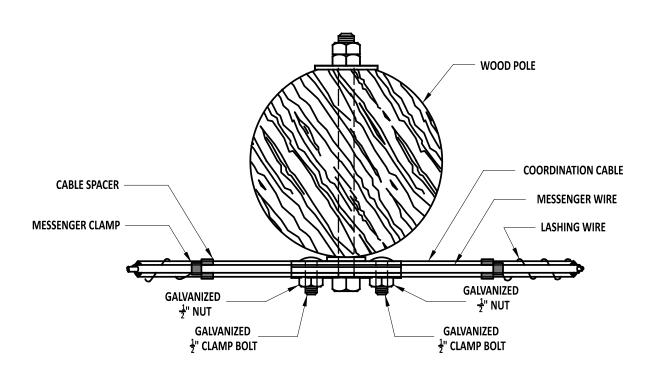

DETAIL "A"

TOP VIEW



O9/01/2020

ONE DATE


RECOMMENDED

MESSENGER WIRE ATTACHMENT INTERMEDIATE MESSENGER WIRE ATTACHMENT ON WOOD POLES


STANDARD NO. T-11 (2020) SHT. 1 OF 2


REVIEWED APPROVED


09/01/2020 TOR- DESIGN DATE

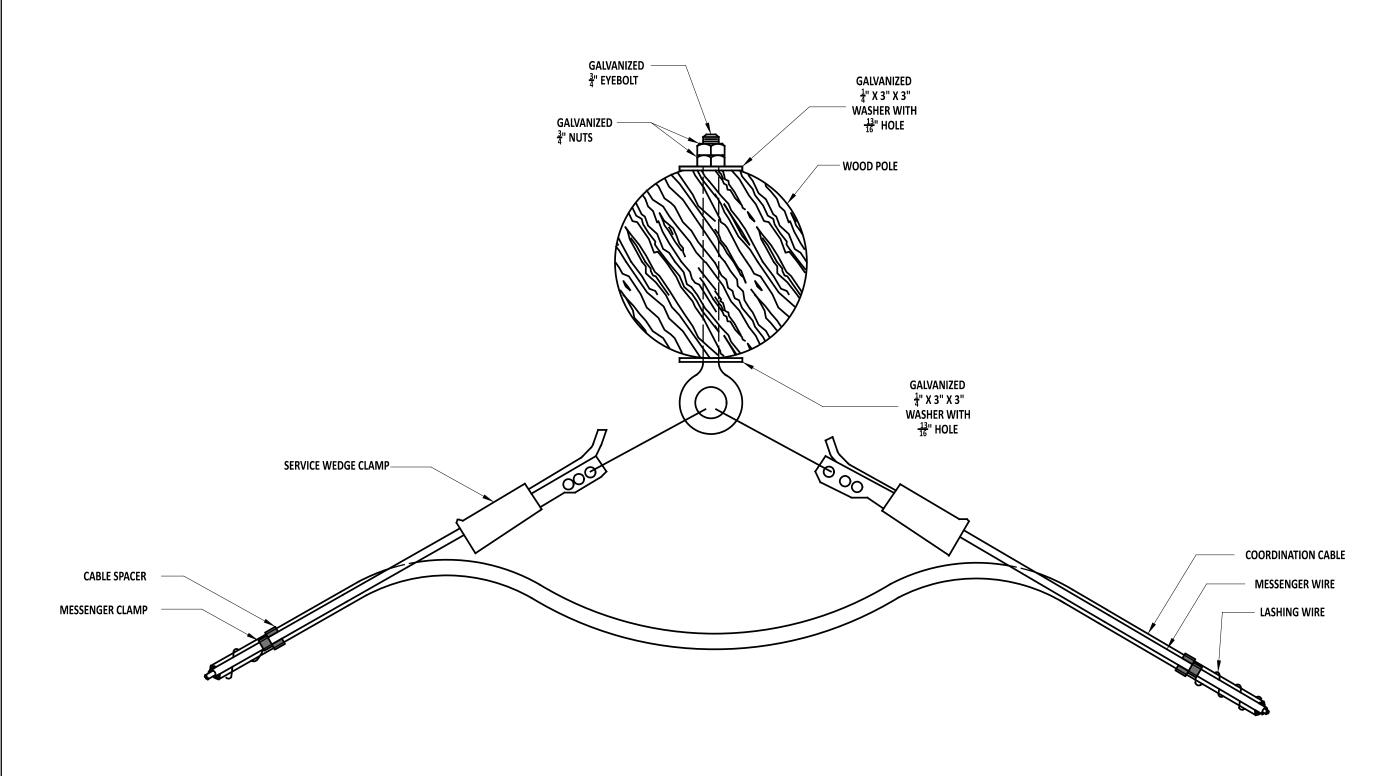







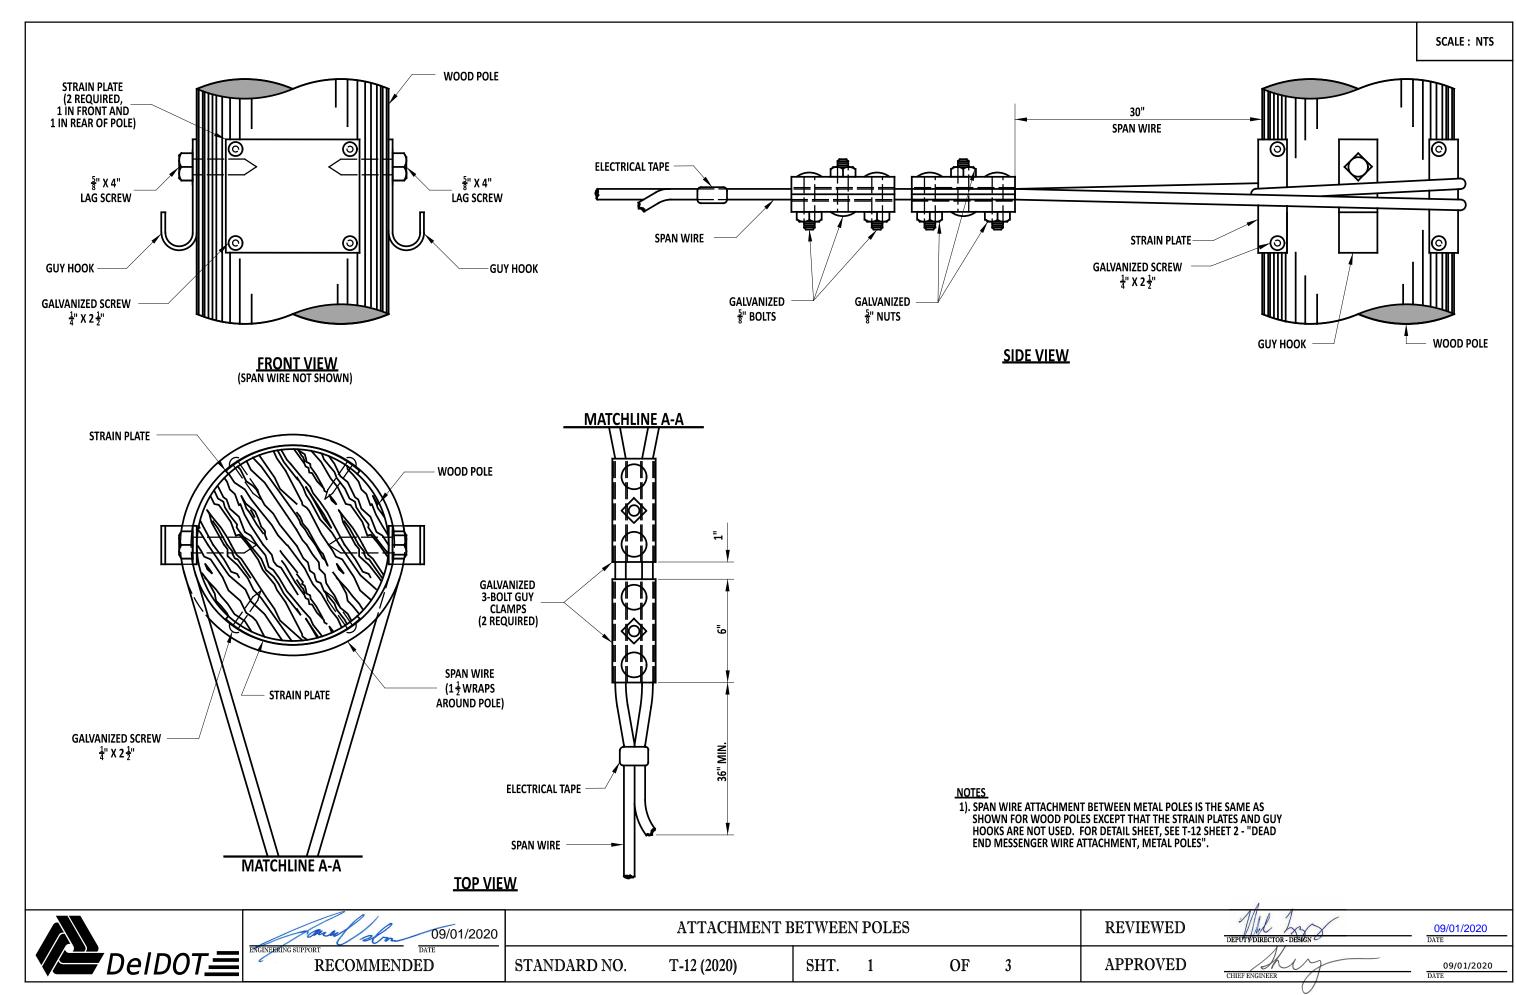


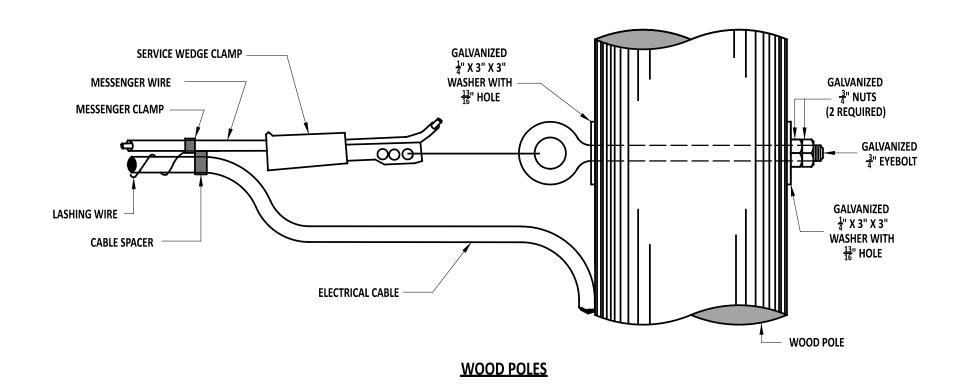

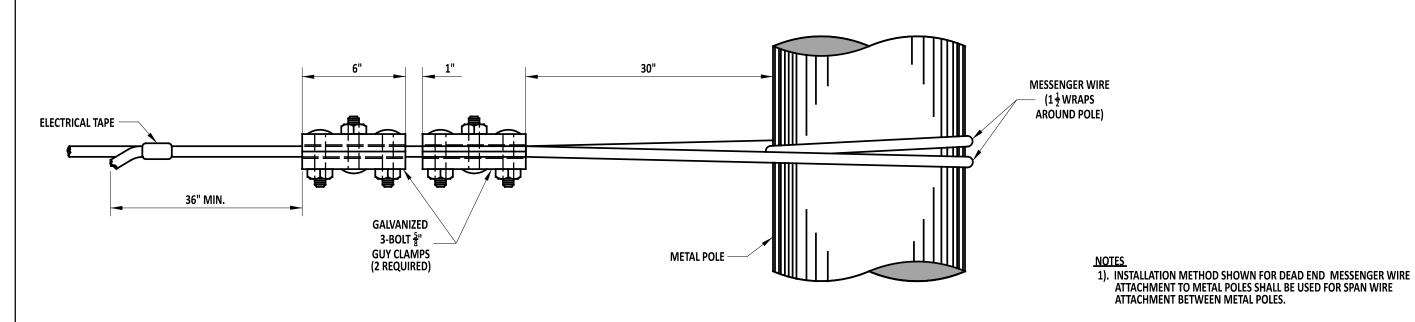



METAL POLES




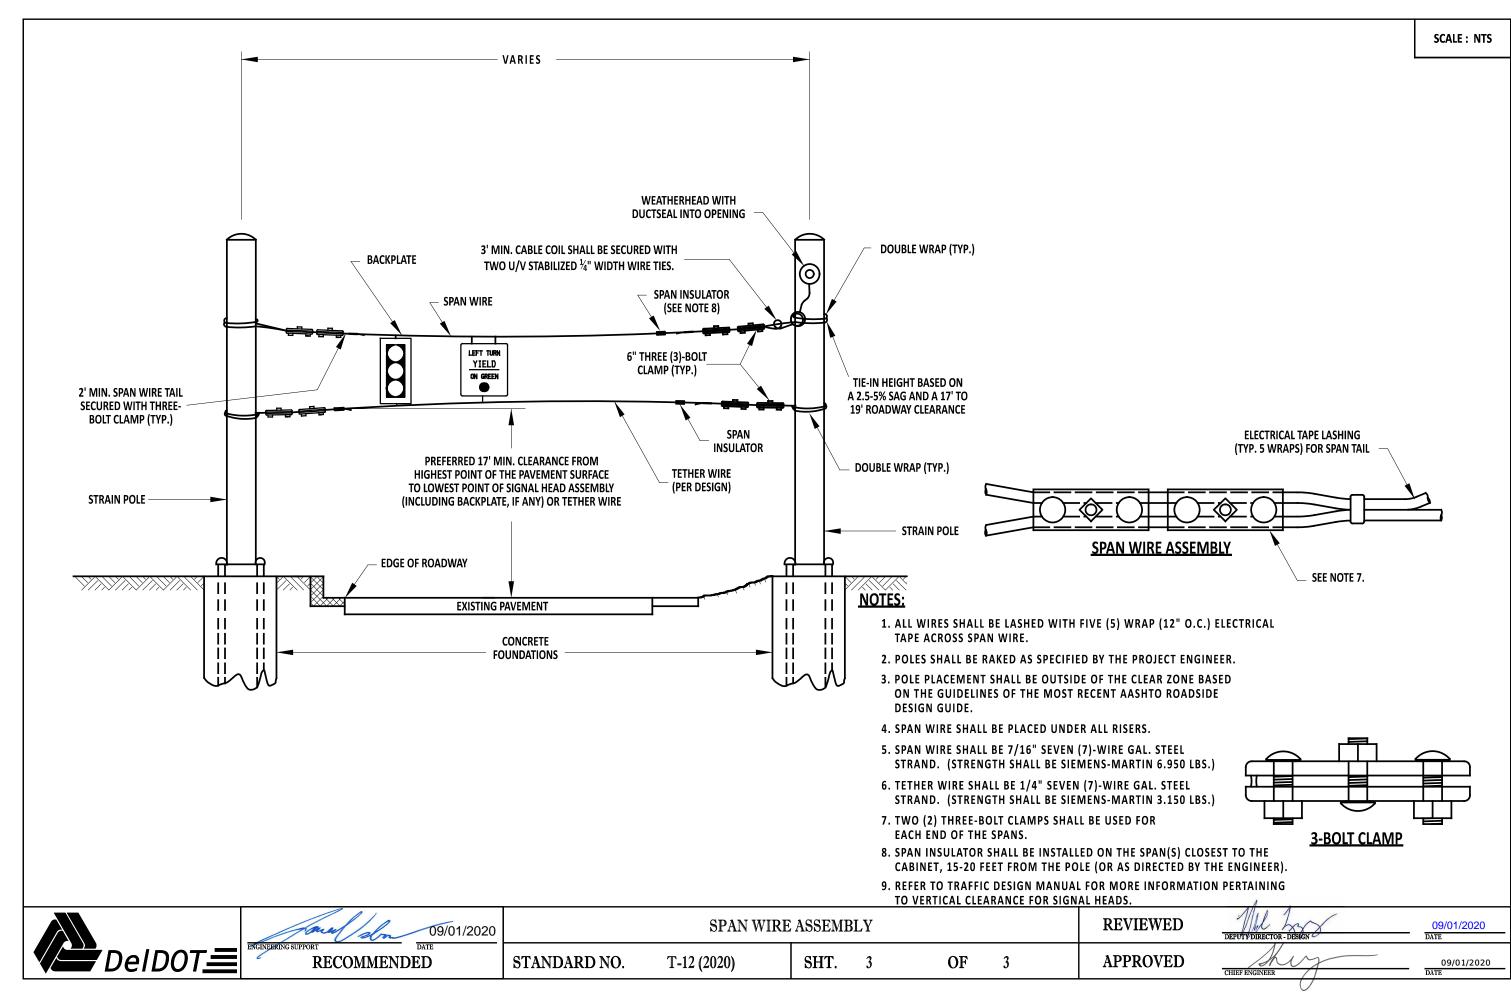


T-13 DETAIL RESERVED LEFT BLANK FOR FUTURE




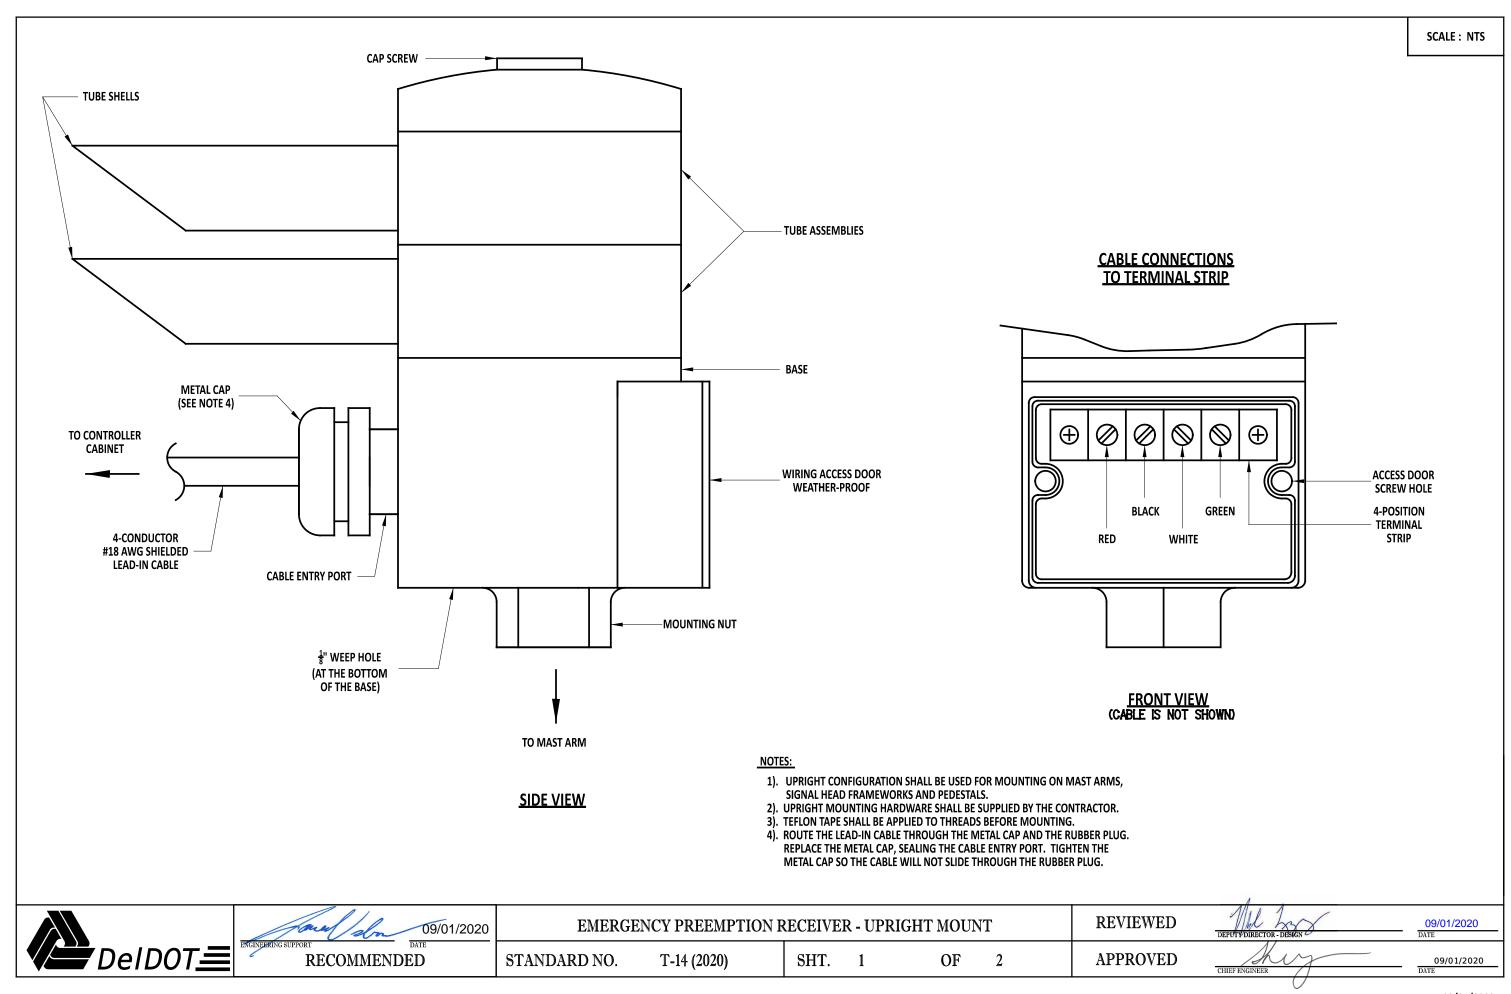


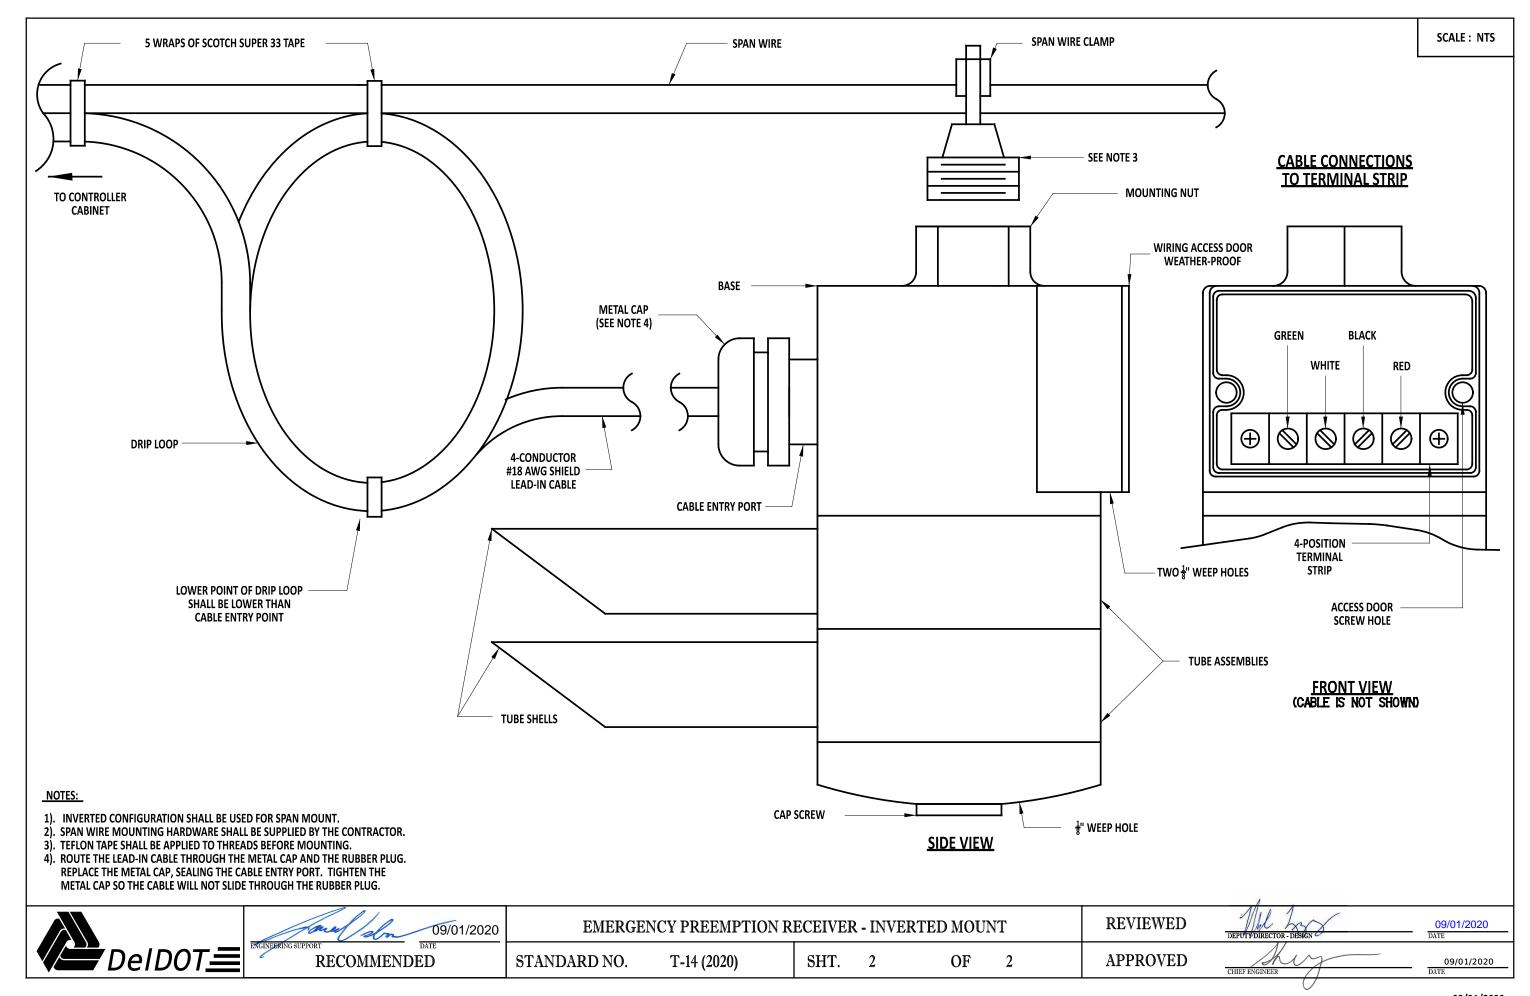

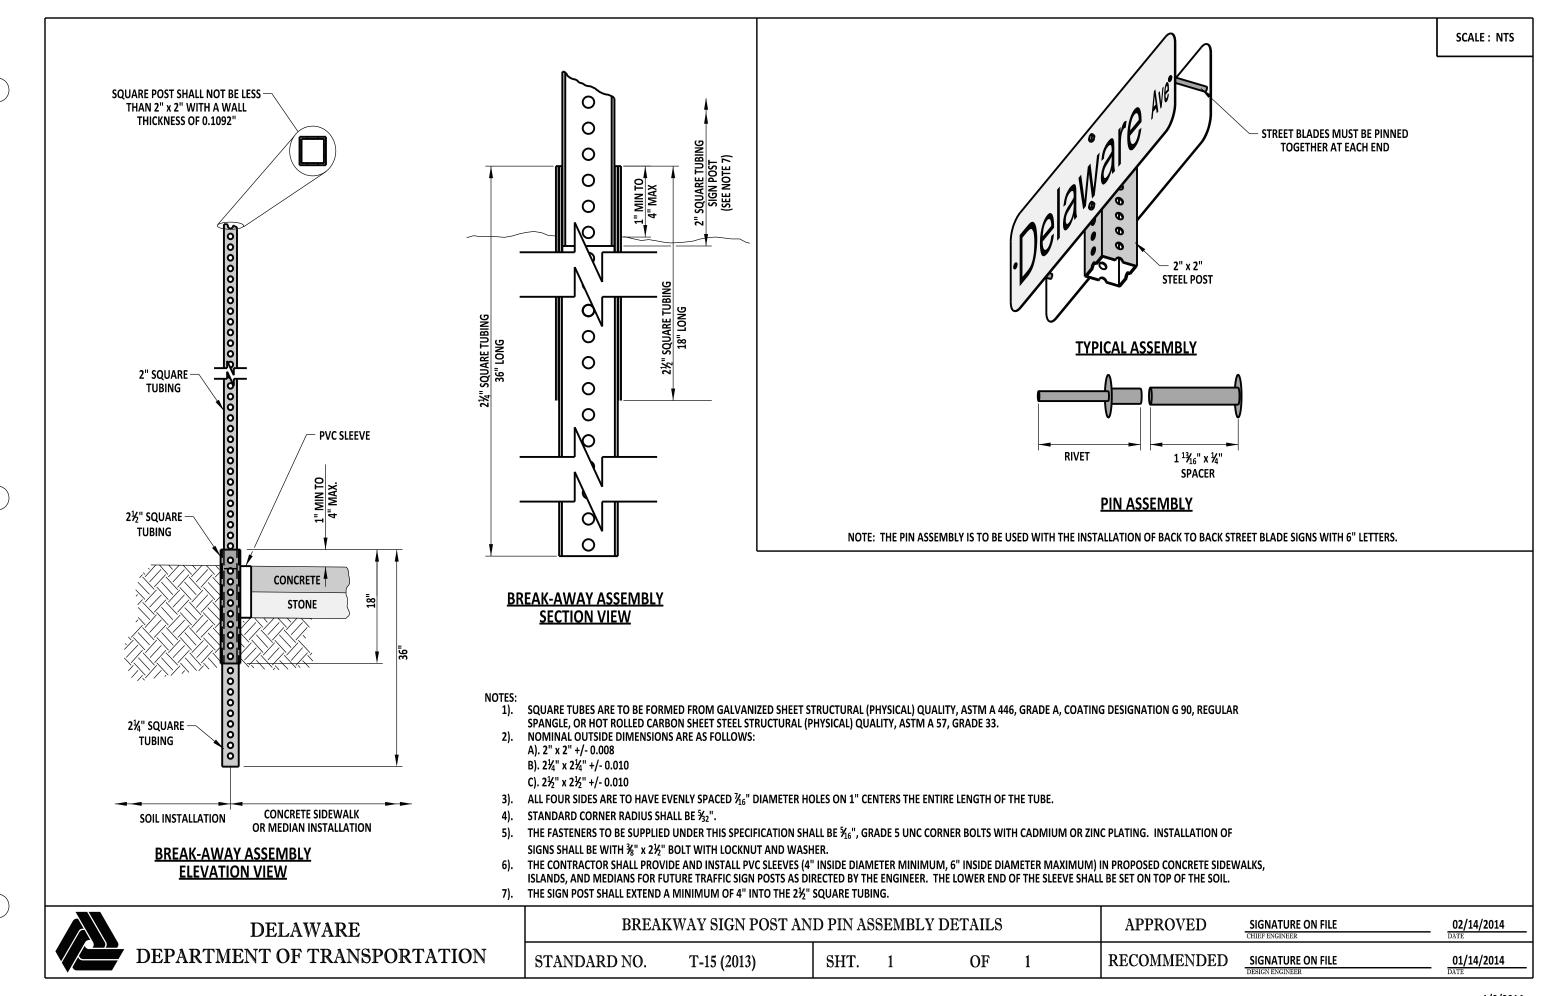



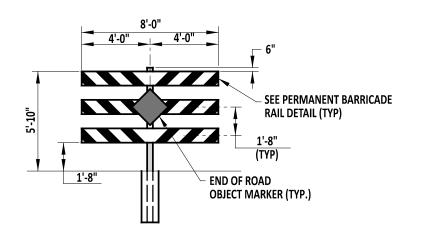



PERMANENT BARRICADE RAIL DETAIL


1" x 10" PERMANENT

BARRICADE RAIL


NUMBER OF ROADWAY OUTSIDE TYPE OF POST WIDTH **BARRICADES OVERHANG** 4'-0" 1-POST 2'-0" 6'-0" 3'-0" 1-POST 8'-0" 1-POST 4'-0" (1.2m) 10'-0" 1'-0" 2-POST 12'-0" 2-POST 2'-0" 14'-0" 2-POST 3'-0" 16'-0" 2-POST 4'-0" 18'-0" 1'-0" 3-POST 3-POST 20'-0" 2'-0" 22'-0" 3-POST 3'-0" 24'-0" 3-POST 4'-0" 26'-0' 2-POST 1'-0" 2'-0" 28'-0" 2-POST 30'-0" 3'-0" 2-POST 32'-0" 4'-0" 2-POST 2-POST 34'-0" 2 1'-0" 3-POST 2-POST 2 2'-0" 36'-0" 3-POST 2-POST 38'-0" 2 3'-0" 3-POST 2-POST 40'-0" 2 4'-0" 3-POST 42'-0" 1'-0" 3-POST 2'-0" 44'-0" 3-POST 46'-0" 3-POST 3'-0" 48'-0" 3-POST 4'-0" (2) 2-POST <ENDS> 3 50'-0" 1'-0" (1) 3-POST <CENTER>

PERMANENT WOOD BARRICADE POST CHART

1-POST PERMANENT WOOD BARRICADE DETAIL

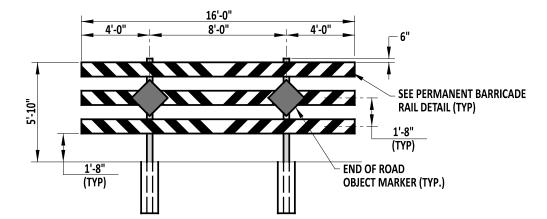

2-POST PERMANENT WOOD BARRICADE DETAIL

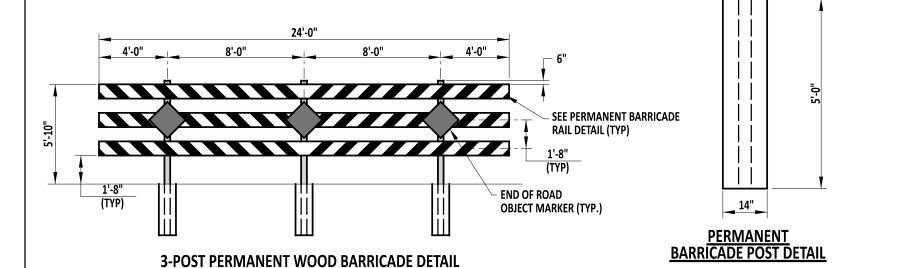

STANDARD NO.

NOTES:

OF

4" x 4" TREATED WOOD POST ⅓" DIA x 2"

WITH WASHERS

LONG (MIN) LAG BOLTS

- THIS DETAIL IS NOT IS NOT CONSIDERED A BREAKAWAY FEATURE AND HAS NOT BEEN CRASH TESTED TO CURRENT MASH CRASH TESTING STANDARDS. THIS DETAIL SHALL ONLY BE USED FOR PERMANENT BARRICADES PLACED OUTSIDE OF THE CLEAR ZONE OR ON LOW SPEED (<40 MPH) ROADWAYS.
- PERMANENT BARRICADES SHALL BE PLACED COMPLETELY ACROSS THE ROADWAY FROM EDGE OF ROAD TO EDGE OF ROAD. IF NECESSARY, THE PERMANENT BARRICADE OVERHANG BEYOND THE OUTSIDE POSTS (TYPICALLY 4'-0" (1.2m)) MAY BE REDUCED TO THE "OUTSIDE OVERHANG' VALUE INDICATED IN THE TABLE ABOVE IF OBSTACLES ARE PRESENT BEYOND THE ROADWAY EDGE.
- MARKINGS FOR PERMANENT BARRICADE RAILS SHALL BE ALTERNATING FLUORESCENT RED AND WHITE STRIPES, SLOPING DOWNWARD AT AN ANGLE OF 45 DEGREES, USING PRISMATIC, RETROREFLECTIVE SHEETING. STRIPES SHALL SLOPE DOWNWARD TOWARDS THE CENTER OF THE CLOSURE.
- ATTACH PERMANENT BARRICADE RAIL AND OBJECT MARKER TO THE 4" (100) x 4" (100) PRESSURE TREATED WOOD POST USING LAG BOLTS (2" (50) LONG, MINIMUM) WITH WASHERS. TWO BOLTS PER RAIL PER POST SHALL BE REQUIRED.
- ALL WOOD SHALL BE PRESSURE TREATED.
- THE END OF ROAD OBJECT MARKER (MUTCD CODE OM4-3) SHALL BE 18" (450) x 18" (450) WITH RED PRISMATIC, RETROREFLECTIVE SHEETING.
- TREATED WOOD POST SHALL BE PLACED IN PRE-DUG HOLE, BACKFILLED USING SUITABLE MATERIAL, AND TAMPERED THOROUGHLY TO PROVIDE A RIGID SUB-SURFACE CONDITION AROUND THE POST.
- PERMANENT BARRICADE RAILS MAY BE CONSTRUCTED USING PLASTIC OR WOOD AND SHALL NOT BE METAL.
- LONGER WIDTH CLOSERS CAN BE ACCOMODATED BY VARIOUS COMBINATIONS OF 2-POST AND 3-POST PERMANENT BARRICADES.



09/01/2020 RECOMMENDED

PERMANENT WOOD BARRICADE

T-16 (2020)

SHT. 1


REVIEWED

APPROVED

09/01/2020

CHIEF ENGINEER

STANDARD INSTALLATION (3+ DEVICES)

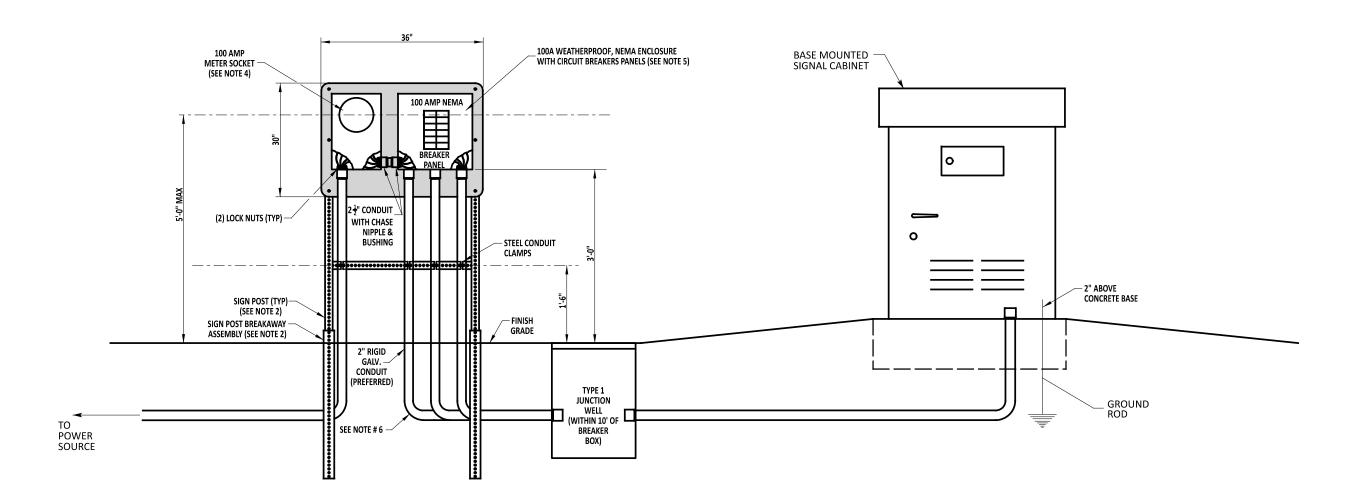

NOTES:

- 1). INSTALLATION OF EQUIPMENT BETWEEN SERVICE PEDESTAL AND CONTROLLER CABINET SHALL BE AS PER CONTRACT DRAWINGS/DETAILS.
- 2). SEE DETAIL T-15, SHEET 1, FOR SIGN POST AND BREAKAWAY ASSEMBLY DETAILS.
- 3). ATTACH ALUMINUM PANEL TO SIGN POSTS WITH (6) $\frac{5}{16}$ " x $2\frac{1}{2}$ " LONG GRADE 5 BOLTS, FLAT WASHERS, AND NYLON LOCK NUTS, 3 ON EACH SIDE.
- 4). MOUNT METER SOCKET TO ALUMINUM PANEL WITH (4) $^5\!\!/_6$ " x $^3\!\!/_4$ " STAINLESS STEEL BOLTS AND NYLON LOCK NUTS.
- 5). MOUNT CIRCUIT BREAKER BOX TO ALUMINUM PANEL WITH (4) $^5\!\!/_6$ " x $^3\!\!/_$ " STAINLESS STEEL BOLTS AND NYLON LOCK NUTS.
- 6). ALL CONDUITS AND OTHER ASSOCIATED PIECES SHALL BE 2" RIGID GALVINZED CONDUIT UNLESS SPECIFIED DIFFERENTLY ON THE PLANS OR BY LOCAL UTILITY COMPANY. ALL CONDUITS SHALL BE INSTALLED FROM ENCLOSURE TO TYPE 1 JUNCTION WELL. JUNCTION WELL SHALL BE PLACED WITHIN 10' OF SERVICE PEDESTAL (OR PER PLAN).

CHIEF ENGINEER



DATE

RECOMMENDED

ELECTRICAL SERVICE PEDESTAL SIGNAL & ITS COMPONENT INSTALLATIONS - 100 AMP (3+ DEVICES)

STANDARD NO. T-17 (2020) SHT. 1 OF 5

REVIEWED


09/01/2020 DATE

APPROVED


09/01/2020 DATE



CONDENSED INSTALLATION (3+ DEVICES)

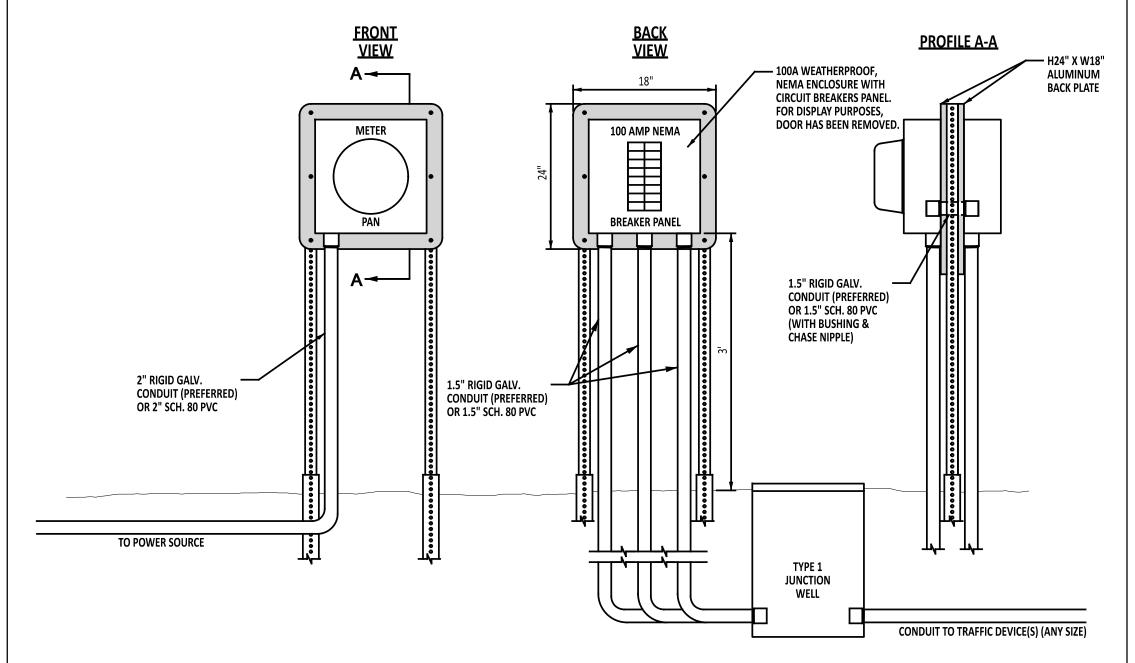

CONDENSED INSTALLATION (UP TO 2 DEVICES)

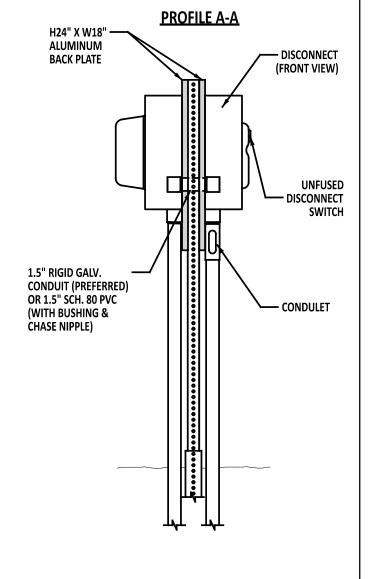

SPECIALTY DISCONNECT TYPICAL

NOTES

1.) TO BE USED FOR 2 OR LESS DEVICES WITHIN CONDENSED SPACE.

<u>NOTES</u>

- 1.) PEDESTAL SHALL BE USED WHEN ALL DEVICES ARE CLOSE TO POWER SOURCE.
- 2.) PEDESTAL SHALL BE 5 FEET FROM JUNCTION WELL.
- 3.) TO BE USED FOR 3 OR MORE DEVICES WITHIN CONDENSED SPACE.



DATE

RECOMMENDED


ELECTRICAL SERVICE PEDESTAL SIGNAL & ITS COMPONENT INSTALLATIONS - 100 AMP (CONDENSED)


REVIEWED


09/01/2020 DATE


STANDARD NO. T-17 (2020) SHT. 2 OF 5 APPROVED


STANDARD INSTALLATION (UP TO 2 DEVICES)

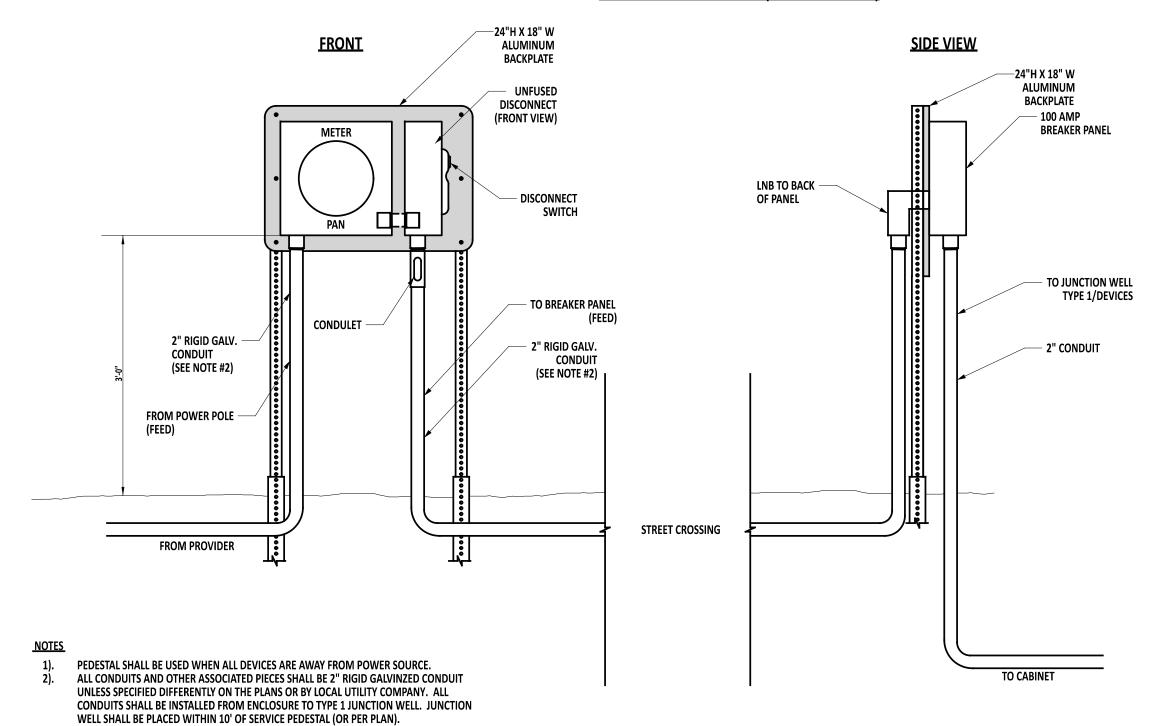




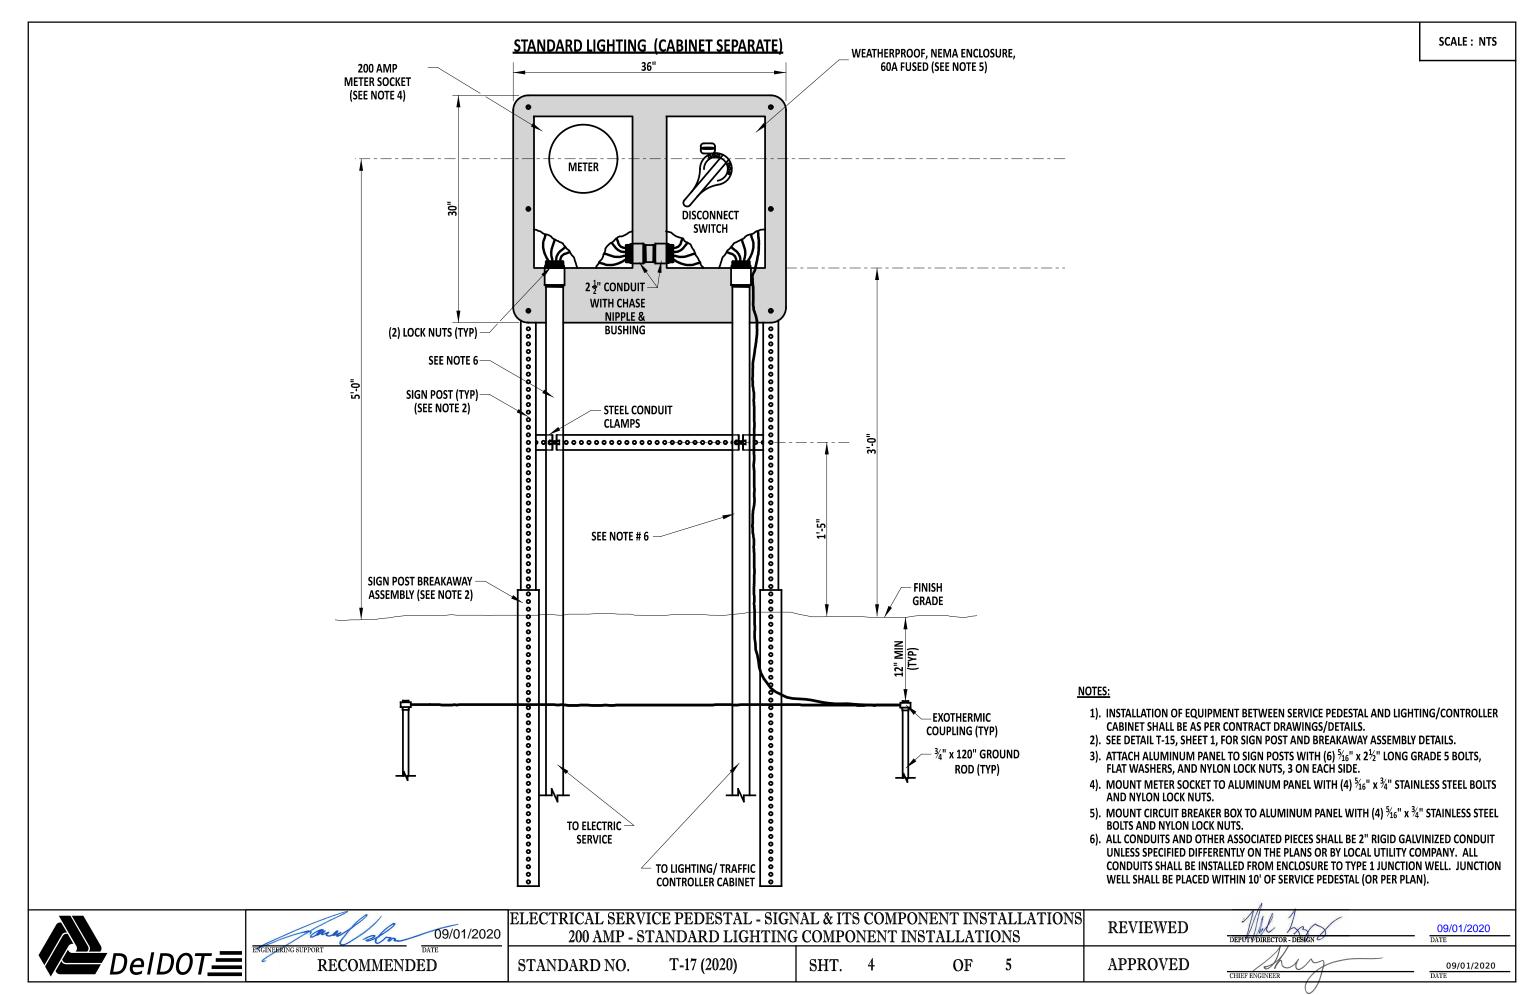

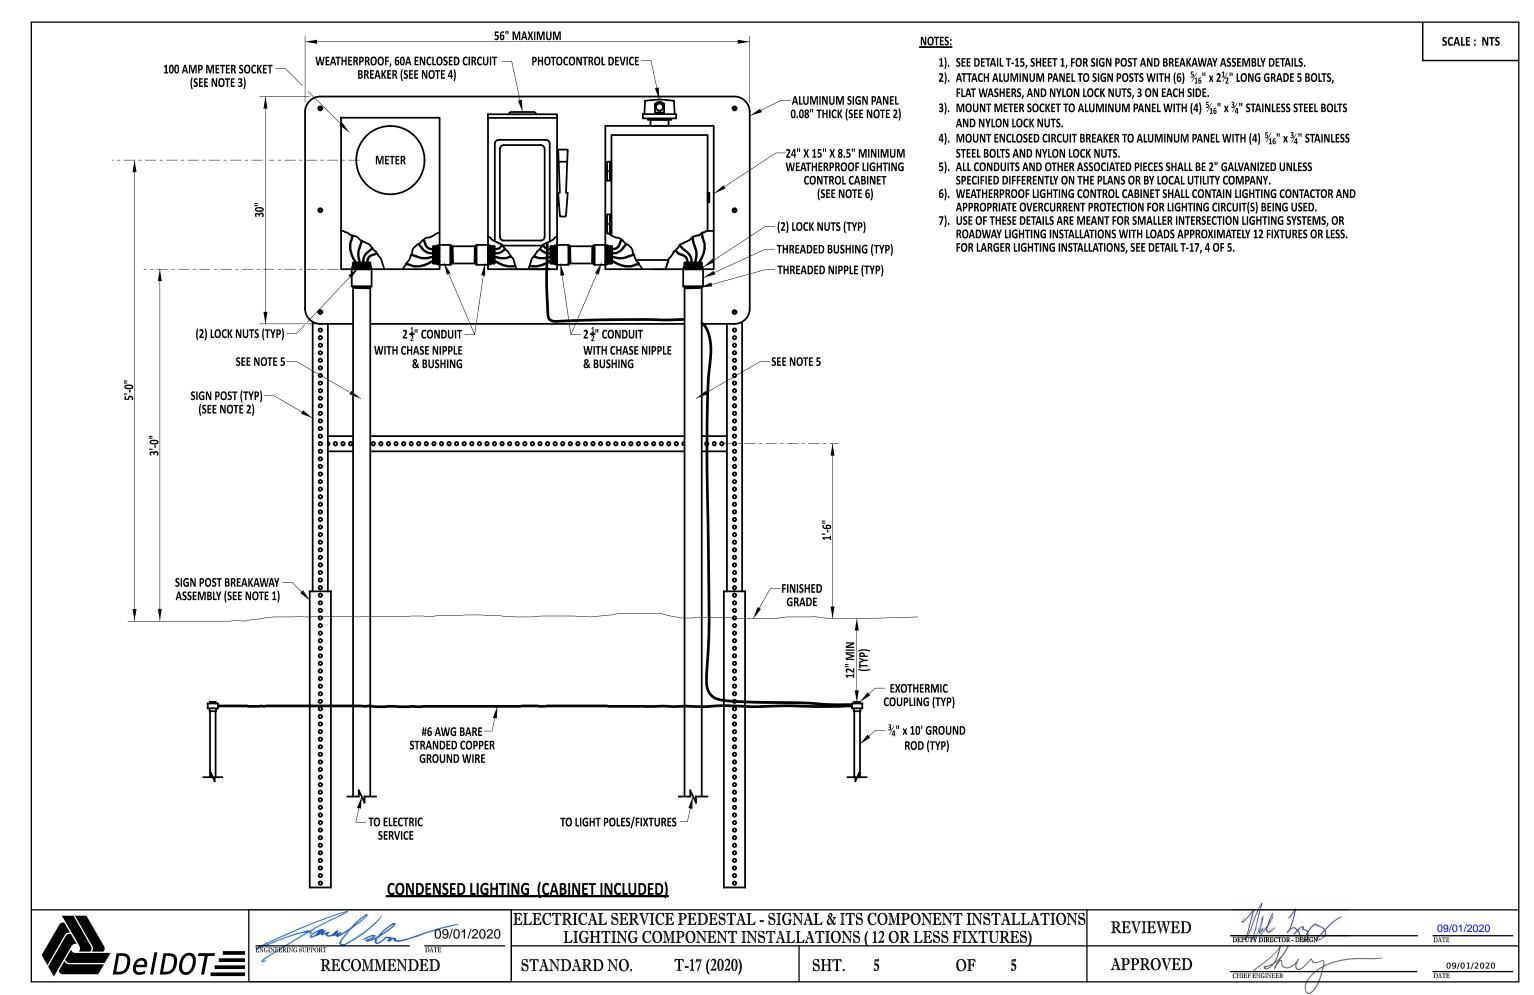

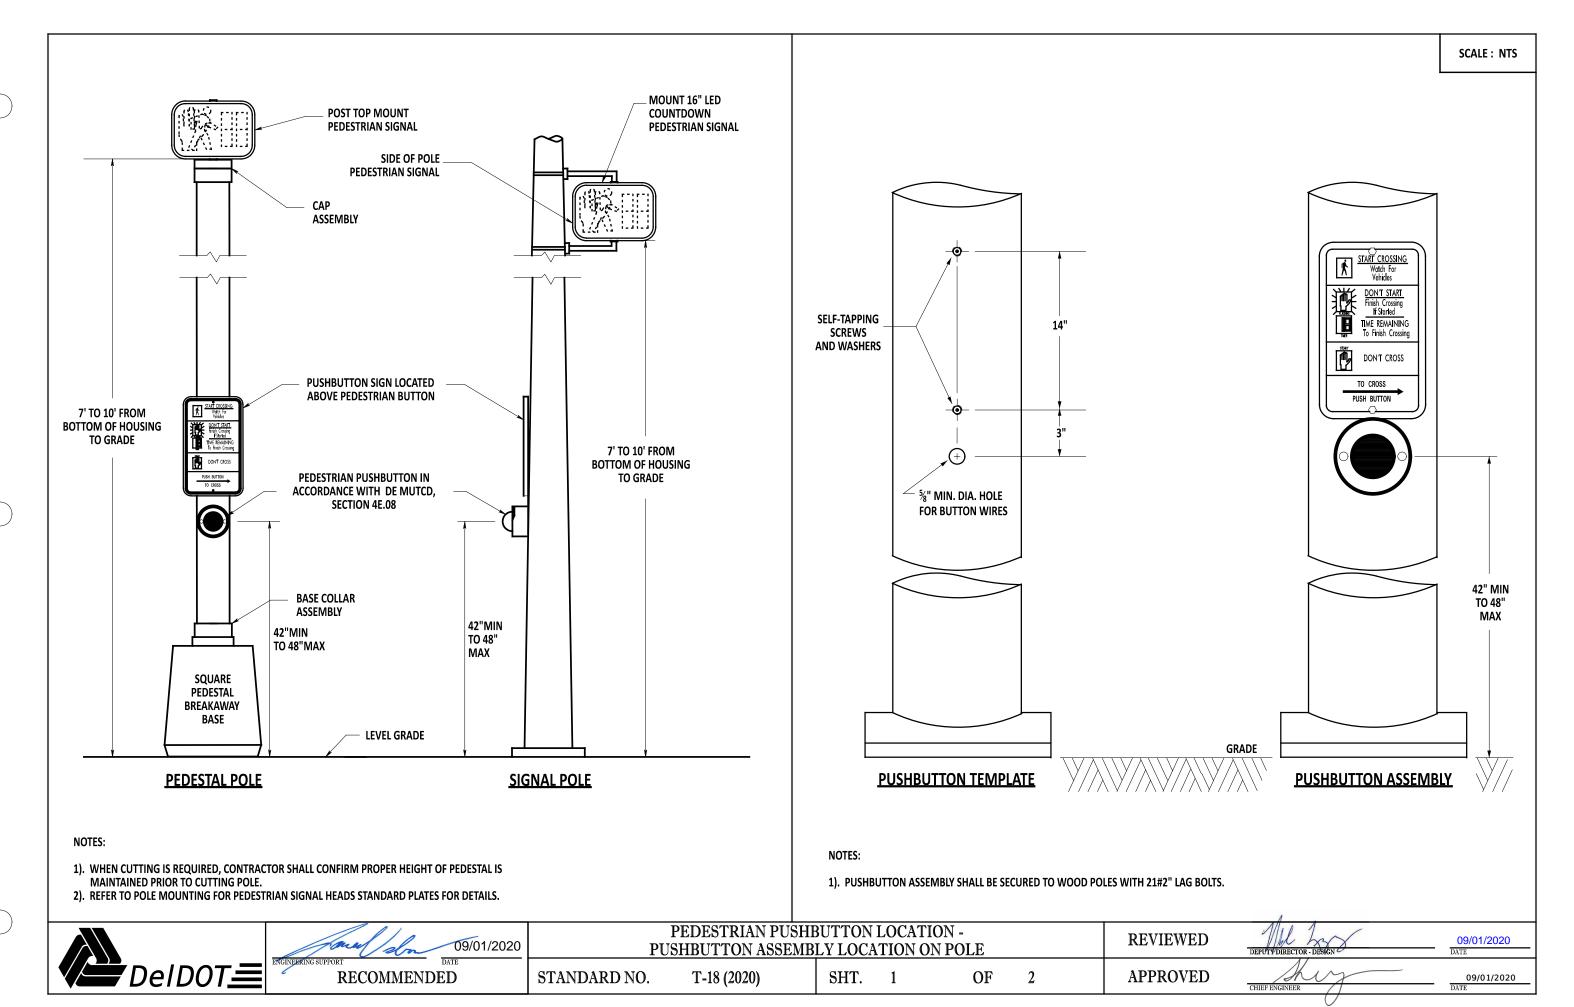

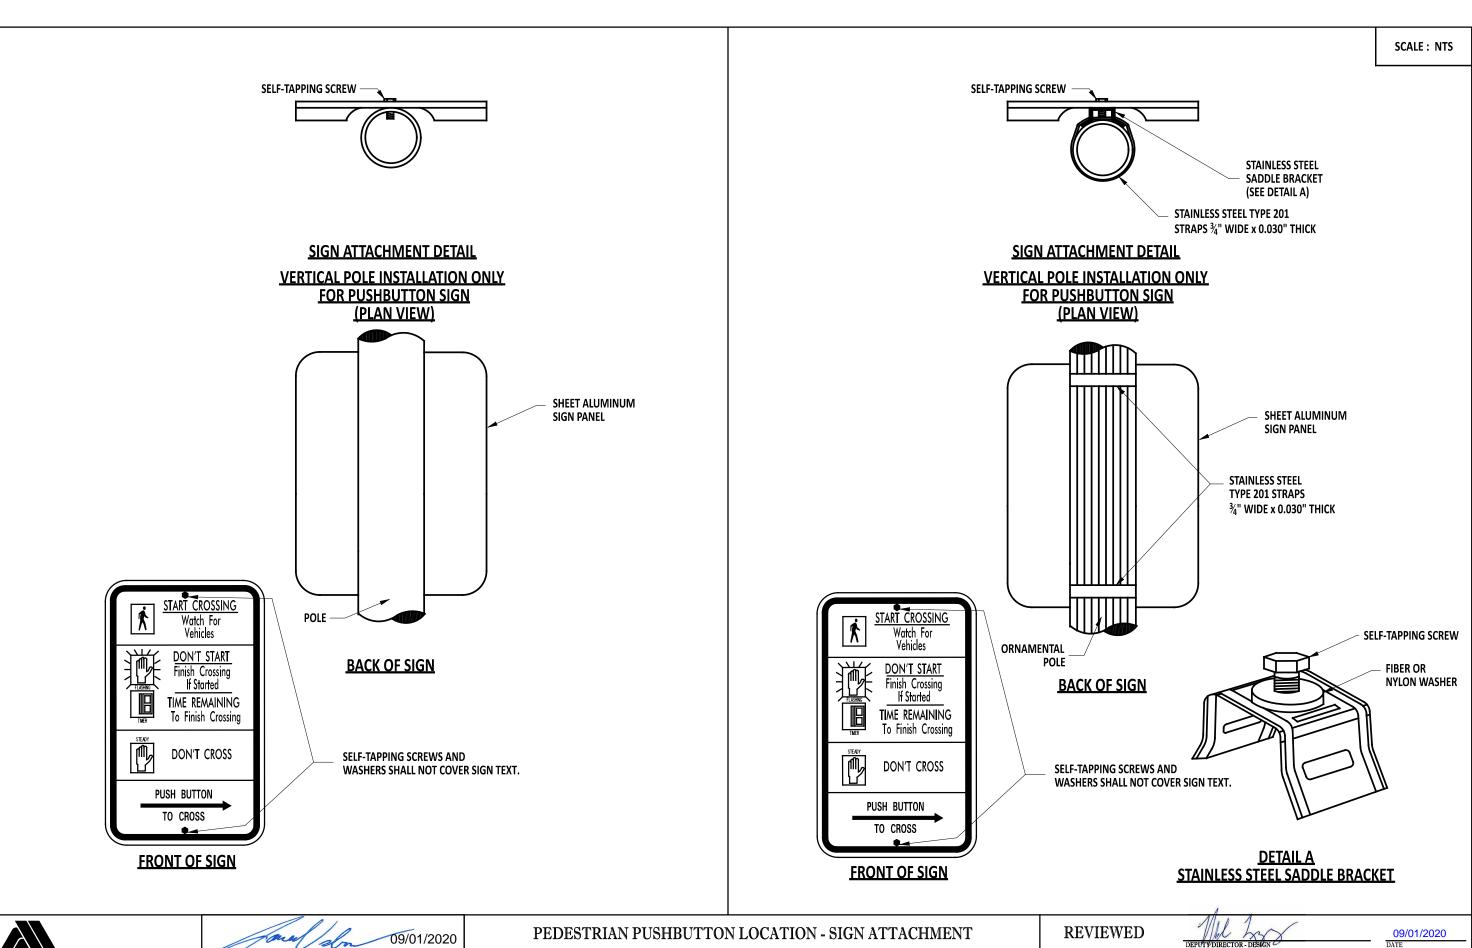

APPROVED SHT. 2 OF 2

CHIEF ENGINEER

09/01/2020

08/21/2020